


**HSS STRAIGHT SHANK DRILLS, GOLD-P COATED**  
**HSS SPIRALBOHRER, GOLD-P BESCHICHTET**

**JOBBER**

**KURZ**

- ▶ **Flute Geometry** : Right hand helix
- ▶ **Point Angle** : 118°, Normal point
- ▶ **Surface treatment** : Bright body, TiN coating on working area
- ▶ **Application** : Drilling steels, Cast steels alloyed and Non-alloyed, Grey cast iron, Graphite, Malleable cast iron

- ▶ **Nutenform** : Rechtsspirale
- ▶ **Spitzenwinkel** : 118° Normalanschliff
- ▶ **Oberfläche** : Blank mit TiN-Beschichtung im Arbeitsbereich
- ▶ **Anwendung** : Stahl, legierter und unlegierter Stahlguss, Grauguss, Graphit, Temperguss



DIN 338
HSS
N 30°
h8
118°
P.169

Unit : mm

EDP No.	Drill Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2		D1	L1	L2
D1GP125010	1.0	12	34	D1GP125041	4.1	43	75
D1GP125011	1.1	14	36	D1GP125042	4.2	43	75
D1GP125012	1.2	16	38	D1GP125043	4.3	47	80
D1GP125013	1.3	16	38	D1GP125044	4.4	47	80
D1GP125014	1.4	18	40	D1GP125045	4.5	47	80
D1GP125015	1.5	18	40	D1GP125046	4.6	47	80
D1GP125016	1.6	20	43	D1GP125047	4.7	47	80
D1GP125017	1.7	20	43	D1GP125048	4.8	52	86
D1GP125018	1.8	22	46	D1GP125049	4.9	52	86
D1GP125019	1.9	22	46	D1GP125050	5.0	52	86
D1GP125020	2.0	24	49	D1GP125051	5.1	52	86
D1GP125021	2.1	24	49	D1GP125052	5.2	52	86
D1GP125022	2.2	27	53	D1GP125053	5.3	52	86
D1GP125023	2.3	27	53	D1GP125054	5.4	57	93
D1GP125024	2.4	30	57	D1GP125055	5.5	57	93
D1GP125025	2.5	30	57	D1GP125056	5.6	57	93
D1GP125026	2.6	30	57	D1GP125057	5.7	57	93
D1GP125027	2.7	33	61	D1GP125058	5.8	57	93
D1GP125028	2.8	33	61	D1GP125059	5.9	57	93
D1GP125029	2.9	33	61	D1GP125060	6.0	57	93
D1GP125030	3.0	33	61	D1GP125061	6.1	63	101
D1GP125031	3.1	36	65	D1GP125062	6.2	63	101
D1GP125032	3.2	36	65	D1GP125063	6.3	63	101
D1GP125033	3.3	36	65	D1GP125064	6.4	63	101
D1GP125034	3.4	39	70	D1GP125065	6.5	63	101
D1GP125035	3.5	39	70	D1GP125066	6.6	63	101
D1GP125036	3.6	39	70	D1GP125067	6.7	63	101
D1GP125037	3.7	39	70	D1GP125068	6.8	69	109
D1GP125038	3.8	43	75	D1GP125069	6.9	69	109
D1GP125039	3.9	43	75	D1GP125070	7.0	69	109
D1GP125040	4.0	43	75	D1GP125071	7.1	69	109

◎ : Excellent ○ : Good

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		Cast Iron	Aluminum	Stainless Steels	Titanium	Mild Steels	Copper	Bronze	CFRP
~HB225	HB225~325	HRc30~45	HRc45~55	HRc55~								
◎	◎					○	○	○	○			




### HSS STRAIGHT SHANK DRILLS, GOLD-P COATED HSS SPIRALBOHRER, GOLD-P BESCHICHTET

**JOBBER**

**KURZ**

- ▶ **Flute Geometry** : Right hand helix
- ▶ **Point Angle** : 118°, Normal point
- ▶ **Surface treatment** : Bright body, TiN coating on working area
- ▶ **Application** : Drilling steels, Cast steels alloyed and Non-alloyed, Grey cast iron, Graphite, Malleable cast iron

- ▶ **Nutenform** : Rechtsspirale
- ▶ **Spitzenwinkel** : 118° Normalanschliff
- ▶ **Oberfläche** : Blank mit TiN-Beschichtung im Arbeitsbereich
- ▶ **Anwendung** : Stahl, legierter und unlegierter Stahlguss, Grauguss, Graphit, Temperguss

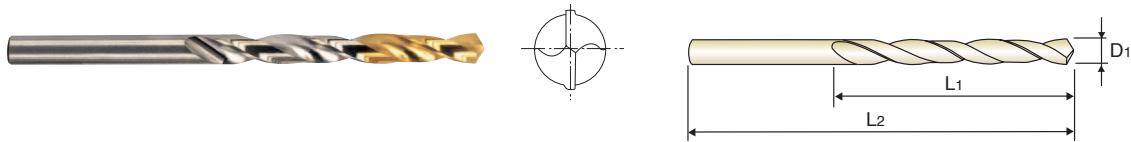

Unit : mm

EDP No.	Drill Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2		D1	L1	L2
D1GP125072	7.2	69	109	D1GP125102	10.2	87	133
D1GP125073	7.3	69	109	D1GP125103	10.3	87	133
D1GP125074	7.4	69	109	D1GP125104	10.4	87	133
D1GP125075	7.5	69	109	D1GP125105	10.5	87	133
D1GP125076	7.6	75	117	D1GP125106	10.6	87	133
D1GP125077	7.7	75	117	D1GP125107	10.7	94	142
D1GP125078	7.8	75	117	D1GP125108	10.8	94	142
D1GP125079	7.9	75	117	D1GP125109	10.9	94	142
D1GP125080	8.0	75	117	D1GP125110	11.0	94	142
D1GP125081	8.1	75	117	D1GP125111	11.1	94	142
D1GP125082	8.2	75	117	D1GP125112	11.2	94	142
D1GP125083	8.3	75	117	D1GP125113	11.3	94	142
D1GP125084	8.4	75	117	D1GP125114	11.4	94	142
D1GP125085	8.5	75	117	D1GP125115	11.5	94	142
D1GP125086	8.6	81	125	D1GP125116	11.6	94	142
D1GP125087	8.7	81	125	D1GP125117	11.7	94	142
D1GP125088	8.8	81	125	D1GP125118	11.8	94	142
D1GP125089	8.9	81	125	D1GP125119	11.9	101	151
D1GP125090	9.0	81	125	D1GP125120	12.0	101	151
D1GP125091	9.1	81	125	D1GP125121	12.1	101	151
D1GP125092	9.2	81	125	D1GP125122	12.2	101	151
D1GP125093	9.3	81	125	D1GP125123	12.3	101	151
D1GP125094	9.4	81	125	D1GP125124	12.4	101	151
D1GP125095	9.5	81	125	D1GP125125	12.5	101	151
D1GP125096	9.6	87	133	D1GP125126	12.6	101	151
D1GP125097	9.7	87	133	D1GP125127	12.7	101	151
D1GP125098	9.8	87	133	D1GP125128	12.8	101	151
D1GP125099	9.9	87	133	D1GP125129	12.9	101	151
D1GP125100	10.0	87	133	D1GP125130	13.0	101	151
D1GP125101	10.1	87	133				

◎ : Excellent ○ : Good

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		Cast Iron	Aluminum	Stainless Steels	Titanium	Mild Steels	Copper	Bronze	CFRP
~HB225	HB225~325	HRc30~45	HRc45~55	HRc55~								
◎	◎					○	○	○	○			



### GOLD-P COATED DRILLS GOLD-P BESCHICHTET BOHRER

#### D1GP125, D1GP165, DLGP195 SERIES

WORK MATERIAL	CARBON STEELS		CARBON STEELS		ALLOY STEELS		STAINLESS STEELS		TITANIUM ALLOYS		ALUMINUM ALLOYS, ZINC ALLOYS		MAGNESIUM ALLOYS	
	N	S	N	S	N	S	N	S	N	S	N	S	N	S
HARDNESS			~ HRC23		~ HRC23 ~ 34		HRC23							
STRENGTH	~ 570 N/mm <sup>2</sup>		~ 830 N/mm <sup>2</sup>		810 ~ 1110 N/mm <sup>2</sup>		~ 830 N/mm <sup>2</sup>		~ 410 N/mm <sup>2</sup>					
DRILLING SPEED	35 ~ 45 m/min		30 ~ 40 m/min		20 ~ 25 m/min		20 ~ 25 m/min		20 ~ 25 m/min		85 ~ 95 m/min		30 ~ 35 m/min	
DIAMETER	N	S	N	S	N	S	N	S	N	S	N	S	N	S
1.0	14000	0.02	12500	0.02	7700	0.02	7000	0.02	8050	0.02	30000	0.02	11500	0.03
2.0	7000	0.06	6100	0.06	3850	0.06	3500	0.06	4050	0.06	15000	0.06	5800	0.09
3.0	4650	0.10	4100	0.08	2550	0.08	2350	0.08	2700	0.08	9900	0.10	3850	0.13
4.0	3500	0.11	3050	0.11	1950	0.10	1750	0.10	2000	0.09	7450	0.11	2900	0.15
5.0	2800	0.12	2450	0.11	1550	0.10	1400	0.10	1600	0.10	5950	0.12	2300	0.17
6.0	2350	0.14	2050	0.13	1300	0.12	1150	0.12	1350	0.12	4950	0.14	1950	0.19
7.0	2000	0.16	1750	0.15	1100	0.14	1000	0.14	1150	0.14	4250	0.16	1650	0.22
8.0	1750	0.18	1550	0.18	960	0.15	875	0.15	1000	0.15	3700	0.18	1450	0.24
9.0	1550	0.20	1350	0.22	855	0.18	780	0.18	895	0.17	3300	0.20	1280	0.27
10.0	1400	0.21	1250	0.22	770	0.18	700	0.18	805	0.18	3000	0.23	1150	0.29
11.0	1250	0.22	1100	0.22	700	0.18	650	0.18	730	0.18	2700	0.23	1050	0.30
12.0	1150	0.23	1000	0.22	650	0.20	585	0.20	670	0.20	2480	0.23	960	0.31
13.0	1050	0.23	950	0.22	595	0.20	540	0.20	620	0.20	2300	0.23	890	0.31

N = R.P.M  
S = Feed per Revolution (mm/rev.)

### GOLD-P COATED DRILLS for DEEP HOLES GOLD-P BESCHICHTET BOHRER für TIEFLOCH MIT ZYLINDERSCHAFT

#### DLGP506 SERIES

WORK MATERIAL	CARBON STEELS ALLOY STEELS		TOOL STEELS HARDENED STEELS		SOFT GREY CAST IRON		HARD GREY CAST IRON	
	N	S	N	S	N	S	N	S
HARDNESS	HRC15 ~ 30		HRC20 ~ 40					
STRENGTH	700 ~ 1000 N/mm <sup>2</sup>		800 ~ 1200 N/mm <sup>2</sup>					
DRILLING SPEED	23 ~ 28 m/min		15 ~ 20 m/min		40 ~ 50 m/min		25 ~ 30 m/min	
DIAMETER	N	S	N	S	N	S	N	S
1.0	8750	0.02	6300	0.02	16000	0.02	9800	0.02
2.0	4400	0.06	3150	0.06	7900	0.07	4900	0.07
3.0	2900	0.08	2100	0.08	5250	0.11	3250	0.11
4.0	2200	0.09	1600	0.09	3950	0.14	2450	0.14
5.0	1750	0.10	1250	0.10	3150	0.14	1950	0.14
6.0	1450	0.12	1050	0.12	2650	0.18	1650	0.18
7.0	1250	0.14	900	0.14	2250	0.20	1400	0.20
8.0	1100	0.15	790	0.15	1950	0.22	1250	0.22
9.0	975	0.17	700	0.17	1750	0.24	1100	0.24
10.0	875	0.18	630	0.18	1600	0.28	980	0.28
11.0	800	0.20	575	0.20	1450	0.28	890	0.28
12.0	730	0.20	525	0.20	1300	0.28	815	0.28
13.0	675	0.20	485	0.20	1200	0.28	755	0.28

N = R.P.M  
S = Feed per Revolution (mm/rev.)