



STRAIGHT SHANK DRILLS

D2105 SERIES


HSSCo8, STRAIGHT SHANK TWIST DRILLS HSSCo8, SPIRALBOHRER mit ZYLINDERSCHAFT

JOBBER


KURZ

► **Surface treatment:** Coloring(Gold color)
 ► **Application:** Drilling stainless steels and difficult - to - cut materials such as titanium and inconel.

► **Oberflächenbehandlung:** Coloring(Goldfarbe)
 ► **Verwendung:** Zum Bohren von rostfreien und austenitischen. Stählen, schwererspanbaren Werkstoffen wie Titan und Inconel.



under 1.6mm 1.6mm & over



DIN 338 HSS Co8 N 33° h8 135° P.215

Unit : mm

EDP No.	Drill Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2		D1	L1	L2
D2105010	1.0	12	34	D2105031	3.1	36	65
D2105011	1.1	14	36	D2105032	3.2	36	65
D2105012	1.2	16	38	D2105932	3.25	36	65
D2105912	1.25	16	38	D2105033	3.3	36	65
D2105013	1.3	16	38	D2105034	3.4	39	70
D2105014	1.4	18	40	D2105035	3.5	39	70
D2105015	1.5	18	40	D2105036	3.6	39	70
D2105016	1.6	20	43	D2105037	3.7	39	70
D2105017	1.7	20	43	D2105937	3.75	39	70
D2105917	1.75	22	46	D2105038	3.8	43	75
D2105018	1.8	22	46	D2105039	3.9	43	75
D2105019	1.9	22	46	D2105040	4.0	43	75
D2105020	2.0	24	49	D2105041	4.1	43	75
D2105021	2.1	24	49	D2105042	4.2	43	75
D2105022	2.2	27	53	D2105942	4.25	43	75
D2105922	2.25	27	53	D2105043	4.3	47	80
D2105023	2.3	27	53	D2105044	4.4	47	80
D2105024	2.4	30	57	D2105045	4.5	47	80
D2105025	2.5	30	57	D2105046	4.6	47	80
D2105026	2.6	30	57	D2105047	4.7	47	80
D2105027	2.7	33	61	D2105947	4.75	47	80
D2105927	2.75	33	61	D2105048	4.8	52	86
D2105028	2.8	33	61	D2105049	4.9	52	86
D2105029	2.9	33	61	D2105050	5.0	52	86
D2105030	3.0	33	61	D2105051	5.1	52	86

► TiN(D4105), TiCN(D7105) and TiAlN(DQ105) are available on your request.

◎ : Excellent ○ : Good

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		Cast Iron	Aluminum	Stainless Steels	Titanium	Mild Steels	Copper	Bronze	CFRP
~HB225	HB225~325	HRc30~45	HRc45~55	HRc55~								
◎	◎				○	○	◎	○	○			

CARBIDE

HSS

I-DREAM DRILLS

DREAM DRILLS -GENERAL

DREAM DRILLS -INOX

DREAM DRILLS -ALU

DREAM DRILLS -CFRP

DREAM DRILLS -MQL TYPE

DREAM DRILLS for HARDENED STEELS

GENERAL CARBIDE DRILLS

NC-SPOTTING DRILLS

CENTER DRILLS

MULTI-1 DRILLS

HPD DRILLS

GOLD-P DRILLS

STRAIGHT SHANK DRILLS

TAPER SHANK DRILLS

NC-SPOTTING DRILLS

CENTER DRILLS

SPADE DRILLS

TECHNICAL DATA



STRAIGHT SHANK DRILLS

D2105 SERIES

HSSCo8, STRAIGHT SHANK TWIST DRILLS


JOBBER

HSSCo8, SPIRALBOHRER mit ZYLINDERSCHAFT


KURZ

► **Surface treatment:** Coloring(Gold color)
 ► **Application:** Drilling stainless steels and difficult - to - cut materials such as titanium and inconel.

► **Oberflächenbehandlung:** Coloring(Goldfarbe)
 ► **Verwendung:** Zum Bohren von rostfreien und austenitischen. Stählen, schwererspanbaren Werkstoffen wie Titan und Inconel.



under 1.6mm 1.6mm & over

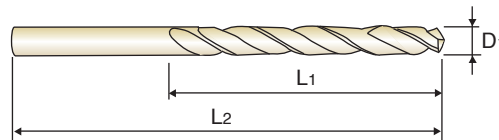

DIN 338
HSS Co8
N 33°
h8
135°
P.215

Unit : mm

EDP No.	Drill Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2		D1	L1	L2
D2105052	5.2	52	86	D2105972	7.25	69	109
D2105952	5.25	52	86	D2105073	7.3	69	109
D2105053	5.3	52	86	D2105074	7.4	69	109
D2105054	5.4	57	93	D2105075	7.5	69	109
D2105055	5.5	57	93	D2105076	7.6	75	117
D2105056	5.6	57	93	D2105077	7.7	75	117
D2105057	5.7	57	93	D2105977	7.75	75	117
D2105957	5.75	57	93	D2105078	7.8	75	117
D2105058	5.8	57	93	D2105079	7.9	75	117
D2105059	5.9	57	93	D2105080	8.0	75	117
D2105060	6.0	57	93	D2105081	8.1	75	117
D2105061	6.1	63	101	D2105082	8.2	75	117
D2105062	6.2	63	101	D2105982	8.25	75	117
D2105962	6.25	63	101	D2105083	8.3	75	117
D2105063	6.3	63	101	D2105084	8.4	75	117
D2105064	6.4	63	101	D2105085	8.5	75	117
D2105065	6.5	63	101	D2105086	8.6	81	125
D2105066	6.6	63	101	D2105087	8.7	81	125
D2105067	6.7	63	101	D2105987	8.75	81	125
D2105967	6.75	69	109	D2105088	8.8	81	125
D2105068	6.8	69	109	D2105089	8.9	81	125
D2105069	6.9	69	109	D2105090	9.0	81	125
D2105070	7.0	69	109	D2105091	9.1	81	125
D2105071	7.1	69	109	D2105092	9.2	81	125
D2105072	7.2	69	109	D2105992	9.25	81	125

► TiN(D4105), TiCN(D7105) and TiAlN(DQ105) are available on your request.

◎ : Excellent ○ : Good

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		Cast Iron	Aluminum	Stainless Steels	Titanium	Mild Steels	Copper	Bronze	CFRP
~HB225	HB225~325	HRc30~45	HRc45~55	HRc55~								
◎	◎				○	○	◎	○	○			



STRAIGHT SHANK DRILLS

D2105 SERIES


HSSCo8, STRAIGHT SHANK TWIST DRILLS HSSCo8, SPIRALBOHRER mit ZYLINDERSCHAFT

JOBBER


KURZ

► **Surface treatment:** Coloring(Gold color)
 ► **Application:** Drilling stainless steels and difficult - to - cut materials such as titanium and inconel.

► **Oberflächenbehandlung:** Coloring(Goldfarbe)
 ► **Verwendung:** Zum Bohren von rostfreien und austenitischen. Stählen, schwererspanbaren Werkstoffen wie Titan und Inconel.



under 1.6mm 1.6mm & over

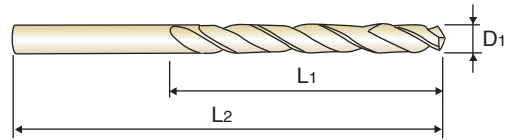

DIN 338 **HSS Co8** **N 33°** **h8** **135°** **P.215**

Unit : mm

EDP No.	Drill Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2		D1	L1	L2
D2105093	9.3	81	125	D2105130	13.0	101	151
D2105094	9.4	81	125	D2105135	13.5	108	160
D2105095	9.5	81	125	D2105140	14.0	108	160
D2105096	9.6	87	133	D2105145	14.5	114	169
D2105097	9.7	87	133	D2105150	15.0	114	169
D2105997	9.75	87	133	D2105155	15.5	120	178
D2105098	9.8	87	133	D2105160	16.0	120	178
D2105099	9.9	87	133	D2105165	16.5	125	184
D2105100	10.0	87	133	D2105170	17.0	125	184
D2105102	10.2	87	133	D2105175	17.5	130	191
D2105105	10.5	87	133	D2105180	18.0	130	191
D2105110	11.0	94	142	D2105185	18.5	135	198
D2105115	11.5	94	142	D2105190	19.0	135	198
D2105120	12.0	101	151	D2105195	19.5	140	205
D2105125	12.5	101	151	D2105200	20.0	140	205

► TiN(D4105), TiCN(D7105) and TiAlN(DQ105) are available on your request.

◎ : Excellent ○ : Good

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		Cast Iron	Aluminum	Stainless Steels	Titanium	Mild Steels	Copper	Bronze	CFRP
~HB225	HB225~325	HRc30~45	HRc45~55	HRc55~								
◎	◎				○	○	◎	○	○			

CARBIDE

HSS

I-DREAM DRILLS

DREAM DRILLS -GENERAL

DREAM DRILLS -INOX

DREAM DRILLS -ALU

DREAM DRILLS -CFRP

DREAM DRILLS -MQL TYPE

DREAM DRILLS for HARDENED STEELS

GENERAL CARBIDE DRILLS

NC-SPOTTING DRILLS

CENTER DRILLS

MULTI-1 DRILLS

HPD DRILLS

GOLD-P DRILLS

STRAIGHT SHANK DRILLS

TAPER SHANK DRILLS

NC-SPOTTING DRILLS

CENTER DRILLS

SPADE DRILLS

TECHNICAL DATA



STRAIGHT SHANK DRILLS

RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDKONDITIONEN

HSS & HSS 8% COBALT DRILLS, DIN1897, DIN338, DIN340, DIN1869 HSS & HSSCo8 SPIRALBOHRER, DIN 1897, DIN 338, DIN 340, DIN 1869

D1107, D2107, D1105, D1125, D2105, DL105, D2104, D1121 SERIES

WORK MATERIAL	CARBON STEELS		CARBON STEELS		CARBON STEELS		ALLOY STEELS		ALLOY STEELS		STAINLESS STEELS		TITANIUM ALLOYS	
	N	S	N	S	N	S	N	S	N	S	N	S	N	S
HARDNESS			~ HRC23		~ HRC23 ~ 28		HRC23 ~ 34		HRC34 ~ 38		HRC23			
STRENGTH	~ 570 N/mm ²		~ 830 N/mm ²		830 ~ 950 N/mm ²		830 ~ 1110 N/mm ²		1110 ~ 1260 N/mm ²		830 N/mm ²		410 N/mm ²	
DRILLING SPEED	22 ~ 27 m/min		15 ~ 20 m/min		10 ~ 15 m/min		15 ~ 20 m/min		8 ~ 12 m/min		15 ~ 20 m/min		8 ~ 12 m/min	
DIAMETER	N	S	N	S	N	S	N	S	N	S	N	S	N	S
2.5	3380	0.025	2550	0.025	1900	0.015	2380	0.020	1400	0.015	2550	0.025	1400	0.020
3.0	2700	0.050	2000	0.050	1500	0.025	1880	0.050	1100	0.020	2000	0.050	1100	0.025
5.0	1700	0.063	1280	0.063	960	0.038	1190	0.063	700	0.025	1280	0.063	700	0.038
8.0	1050	0.130	780	0.130	590	0.076	730	0.130	430	0.038	780	0.130	430	0.076
11.0	750	0.150	560	0.150	425	0.076	520	0.180	310	0.050	560	0.150	430	0.076
19.0	440	0.230	330	0.230	255	0.130	300	0.230	180	0.050	330	0.230	180	0.130
31.0	260	0.280	195	0.280	145	0.180	180	0.280	107	0.076	195	0.280	107	0.180

WORK MATERIAL	TOOL STEELS		CAST IRON		ALUMINUM ALLOYS		MAGNESIUM ALLOYS		ZINC ALLOYS		PLASTICS	
	N	S	N	S	N	S	N	S	N	S	N	S
HARDNESS			~ HRC21									
STRENGTH	~ 270 N/mm ²		~ 800 N/mm ²									
DRILLING SPEED	20 ~ 25 m/min		15 ~ 20 m/min		45 ~ 50 m/min		55 ~ 65 m/min		40 ~ 50 m/min		20 ~ 25 m/min	
DIAMETER	N	S	N	S	N	S	N	S	N	S	N	S
2.5	3180	0.042	2250	0.025	6400	0.038	8600	0.038	6400	0.038	3380	0.025
3.0	2500	0.050	2000	0.050	5000	0.063	6800	0.063	5000	0.063	2700	0.050
5.0	1590	0.063	1280	0.063	3200	0.076	4300	0.076	3200	0.076	1700	0.063
8.0	970	0.130	780	0.130	2000	0.180	2600	0.180	2000	0.180	1050	0.130
11.0	700	0.180	560	0.150	1400	0.200	1900	0.200	1400	0.200	750	0.150
19.0	440	0.230	330	0.230	820	0.300	1100	0.300	820	0.300	440	0.230
31.0	240	0.300	195	0.280	490	0.380	660	0.380	490	0.380	260	0.280

N = R.P.M
S = Feed per Revolution (mm/rev.)

HSS-E, TWIST DRILLS for HEAVY DUTY, DIN338 HSS-E, SPIRALBOHRER für HOHELEISTUNGEN, DIN 338

DL109 SERIES

WORK MATERIAL	CARBON STEELS		CARBON STEELS		CARBON STEELS		ALLOY STEELS		ALLOY STEELS		STAINLESS STEELS		CAST IRON	
	N	S	N	S	N	S	N	S	N	S	N	S	N	S
HARDNESS			~ HRC23		~ HRC23 ~ 28		HRC23 ~ 34		HRC34 ~ 38		HRC23		HRC21	
STRENGTH	~ 570 N/mm ²		~ 830 N/mm ²		830 ~ 950 N/mm ²		830 ~ 1110 N/mm ²		1110 ~ 1260 N/mm ²		830 N/mm ²		800 N/mm ²	
DRILLING SPEED	25 ~ 30 m/min		20 ~ 25 m/min		15 ~ 20 m/min		18 ~ 23 m/min		10 ~ 15 m/min		27 ~ 33 m/min		27 ~ 33 m/min	
DIAMETER	N	S	N	S	N	S	N	S	N	S	N	S	N	S
2.0	5000	0.03	3750	0.03	2850	0.02	3500	0.02	2070	0.02	5000	0.03	5000	0.03
3.0	3750	0.04	2810	0.04	2150	0.02	2625	0.04	1560	0.02	3750	0.04	3750	0.04
4.0	2500	0.06	1870	0.06	1450	0.03	1750	0.06	1050	0.02	2500	0.06	2500	0.06
5.0	2085	0.07	1560	0.07	1205	0.04	1460	0.07	870	0.03	2085	0.07	2085	0.07
6.0	1670	0.08	1250	0.08	960	0.05	1170	0.09	690	0.03	1670	0.08	1670	0.08
7.0	1460	0.10	1095	0.10	840	0.06	1025	0.11	605	0.03	1460	0.10	1460	0.10
8.0	1250	0.13	940	0.13	720	0.08	880	0.13	520	0.04	1250	0.13	1250	0.13
9.0	1125	0.14	845	0.14	645	0.08	790	0.15	465	0.04	1125	0.14	1125	0.14
10.0	1000	0.14	750	0.14	570	0.08	700	0.16	410	0.05	1000	0.14	1000	0.14
11.0	925	0.15	685	0.15	525	0.08	640	0.18	380	0.05	925	0.15	925	0.15
12.0	850	0.16	620	0.16	480	0.08	580	0.19	350	0.05	850	0.16	850	0.16
13.0	785	0.17	575	0.17	445	0.09	540	0.20	325	0.05	785	0.17	785	0.17

N = R.P.M
S = Feed per Revolution (mm/rev.)