



PREMIUM HSS COBALT, HPD TWIST DRILLS for STEELS



JOBBER

PREMIUM HSS KOBALT, HPD SPIRALBOHRER für STÄHLE

KURZ

- **Application** : Designed for high speed non-step 4D ~ 5D drilling.
Drilling mild steels, cast iron, aluminum, alloyed tool steels, etc.
- **Advantage** : Helical thinning - good chip removal, self-centering, reducing thrust and improving accuracy.
Reinforced web and jobbers length - increasing rigidity and suitable for 4D~5D drilling
Premium Cobalt HSS with superior TiN coating - higher speed and feed, longer tool life
High quality & good surface finish, high productivity.

- **Anwendung** : Zum Hochgeschwindigkeitsbohren 4D~5D Bohrtiefe geeignet zum Bearbeiten von Stahl, Gusseisen, Aluminium, Legierungen, Werkzeugstahl, usw.
- **Vorteile** : Gute Spanabfuhr, selbstzentriert, geringere Abdrängung und verbesserte Genauigkeit, kurze Ausführung, verbesserte Stabilität, zum Bearbeiten von Premium kobalt HSS mit hochwertiger TiN-Beschichtung, höhere Geschwindigkeit und Vorschub, längere Standzeit, verbesserte Oberflächengüte und Produktivität.

PREMIUM
HSS-CoN
30°

h7

h6

h8

130°

P.156

D1=D2

up to 13mm over 13mm

Unit : mm

EDP No.	Drill Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Flute Length	Overall Length
TiN	D1	L1	L2	TiN	D1	L1	L2
D4542020	2.0	24	56	D4542932	3.25	36	68
D4542920	2.05	24	56	D4542033	3.3	36	68
D4542021	2.1	24	56	D4542933	3.35	36	68
D4542921	2.15	27	59	D4542034	3.4	39	71
D4542022	2.2	27	59	D4542934	3.45	39	71
D4542922	2.25	27	59	D4542035	3.5	39	71
D4542023	2.3	27	59	D4542935	3.55	39	71
D4542923	2.35	27	59	D4542036	3.6	39	71
D4542024	2.4	30	62	D4542936	3.65	39	71
D4542924	2.45	30	62	D4542037	3.7	39	71
D4542025	2.5	30	62	D4542937	3.75	39	71
D4542925	2.55	30	62	D4542038	3.8	43	75
D4542026	2.6	30	62	D4542938	3.85	43	75
D4542926	2.65	30	62	D4542039	3.9	43	75
D4542027	2.7	33	65	D4542939	3.95	43	75
D4542927	2.75	33	65	D4542040	4.0	43	75
D4542028	2.8	33	65	D4542940	4.05	43	87
D4542928	2.85	33	65	D4542041	4.1	43	87
D4542029	2.9	33	65	D4542941	4.15	43	87
D4542929	2.95	33	65	D4542042	4.2	43	87
D4542030	3.0	33	65	D4542942	4.25	43	87
D4542930	3.05	36	68	D4542043	4.3	47	91
D4542031	3.1	36	68	D4542943	4.35	47	91
D4542931	3.15	36	68	D4542044	4.4	47	91
D4542032	3.2	36	68	D4542944	4.45	47	91

► TiCN(D7542), TiAlN(DQ542) are available on your request.

◎ : Excellent ○ : Good

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		Cast Iron	Aluminum	Stainless Steels	Titanium	Mild Steels	Copper	Bronze	CFRP
~HB225	HB225~325	HRc30~45	HRc45~55	HRc55~								
◎	◎	○			○	○	○	○				

**HPD DRILLS****D4542 SERIES**



PREMIUM HSS COBALT, HPD TWIST DRILLS for STEELS

PREMIUM HSS KOBALT, HPD SPIRALBOHRER für STÄHLE

JOBBER**KURZ**

- **Application** : Designed for high speed non-step 4D ~ 5D drilling.
Drilling mild steels, cast iron, aluminum, alloyed tool steels, etc.
- **Advantage** : Helical thinning - good chip removal, self-centering, reducing thrust and improving accuracy.
Reinforced web and jobbers length - increasing rigidity and suitable for 4D~5D drilling
Premium Cobalt HSS with superior TiN coating - higher speed and feed, longer tool life
High quality & good surface finish, high productivity.

- **Anwendung** : Zum Hochgeschwindigkeitsbohren 4D~5D Bohrtiefe geeignet zum Bearbeiten von Stahl, Gusseisen, Aluminium, Legierungen, Werkzeugstahl, usw.
- **Vorteile** : Gute Spanabfuhr, selbstzentriert, geringere Abdrängung und verbesserte Genauigkeit, kurze Ausführung, verbesserte Stabilität, zum Bearbeiten von Premium kobalt HSS mit hochwertiger TiN-Beschichtung, höhere Geschwindigkeit und Vorschub, längere Standzeit, verbesserte Oberflächengüte und Produktivität.



P.156

D₁=D₂

up to 13mm over 13mm

Unit : mm

EDP No.	Drill Diameter	Flute Length	Overall Length
TiN	D ₁	L ₁	L ₂
D4542045	4.5	47	91
D4542945	4.55	47	91
D4542046	4.6	47	91
D4542946	4.65	47	91
D4542047	4.7	47	91
D4542947	4.75	47	91
D4542048	4.8	52	96
D4542948	4.85	52	96
D4542049	4.9	52	96
D4542949	4.95	52	96
D4542050	5.0	52	96
D4542950	5.05	52	96
D4542051	5.1	52	96
D4542951	5.15	52	96
D4542052	5.2	52	96
D4542952	5.25	52	96
D4542053	5.3	52	96
D4542953	5.35	57	101
D4542054	5.4	57	101
D4542954	5.45	57	101
D4542055	5.5	57	101
D4542955	5.55	57	101
D4542056	5.6	57	101
D4542956	5.65	57	101
D4542057	5.7	57	101

EDP No.	Drill Diameter	Flute Length	Overall Length
TiN	D ₁	L ₁	L ₂
D4542957	5.75	57	101
D4542058	5.8	57	101
D4542958	5.85	57	101
D4542059	5.9	57	101
D4542959	5.95	57	101
D4542060	6.0	57	101
D4542960	6.05	63	107
D4542061	6.1	63	107
D4542961	6.15	63	107
D4542062	6.2	63	107
D4542962	6.25	63	107
D4542063	6.3	63	107
D4542963	6.35	63	107
D4542064	6.4	63	107
D4542964	6.45	63	107
D4542065	6.5	63	107
D4542965	6.55	63	107
D4542066	6.6	63	107
D4542966	6.65	63	107
D4542067	6.7	63	107
D4542967	6.75	69	113
D4542068	6.8	69	113
D4542968	6.85	69	113
D4542069	6.9	69	113
D4542969	6.95	69	113

► TiCN(D7542), TiAlN(DQ542) are available on your request.

◎ : Excellent ○ : Good

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		Cast Iron	Aluminum	Stainless Steels	Titanium	Mild Steels	Copper	Bronze	CFRP
~HB225	HB225~325	HRc30~45	HRc45~55	HRc55~								
◎	◎	○			○	○	○	○				

CARBIDE

HSS

I-DREAM DRILLS

DREAM DRILLS -GENERAL

DREAM DRILLS -INOX

DREAM DRILLS -ALU

DREAM DRILLS -CFRP

DREAM DRILLS -MQL TYPE

DREAM DRILLS for HARDENED STEELS

GENERAL CARBIDE DRILLS

NC-SPOTTING DRILLS

CENTER DRILLS

MULTI-1 DRILLS

HPD DRILLS

GOLD-P DRILLS

STRAIGHT SHANK DRILLS

TAPER SHANK DRILLS

NC-SPOTTING DRILLS

CENTER DRILLS

SPADE DRILLS

TECHNICAL DATA



PREMIUM HSS COBALT, HPD TWIST DRILLS for STEELS



JOBBER

PREMIUM HSS KOBALT, HPD SPIRALBOHRER für STÄHLE

KURZ

- **Application** : Designed for high speed non-step 4D ~ 5D drilling.
Drilling mild steels, cast iron, aluminum, alloyed tool steels, etc.
- **Advantage** : Helical thinning - good chip removal, self-centering, reducing thrust and improving accuracy.
Reinforced web and jobbers length - increasing rigidity and suitable for 4D~5D drilling
Premium Cobalt HSS with superior TiN coating - higher speed and feed, longer tool life
High quality & good surface finish, high productivity.

- **Anwendung** : Zum Hochgeschwindigkeitsbohren 4D~5D
Bohrtiefe geeignet zum Bearbeiten von Stahl, Gusseisen, Aluminium, Legierungen, Werkzeugstahl, usw.
- **Vorteile** : Gute Spanabfuhr, selbstzentriert, geringere Abdrängung und verbesserte Genauigkeit, kurze Ausführung, verbesserte Stabilität, zum Bearbeiten von Premium kobalt HSS mit hochwertiger TiN-Beschichtung, höhere Geschwindigkeit und Vorschub, längere Standzeit, verbesserte Oberflächengüte und Produktivität.

PREMIUM
HSS-Co

P.156

D₁=D₂

up to 13mm over 13mm

Unit : mm

EDP No.	Drill Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Flute Length	Overall Length
TiN	D ₁	L ₁	L ₂	TiN	D ₁	L ₁	L ₂
D4542070	7.0	69	113	D4542982	8.25	75	125
D4542970	7.05	69	113	D4542083	8.3	75	125
D4542071	7.1	69	113	D4542983	8.35	75	125
D4542971	7.15	69	113	D4542084	8.4	75	125
D4542072	7.2	69	113	D4542984	8.45	75	125
D4542972	7.25	69	113	D4542085	8.5	75	125
D4542073	7.3	69	113	D4542985	8.55	81	131
D4542973	7.35	69	113	D4542086	8.6	81	131
D4542074	7.4	69	113	D4542986	8.65	81	131
D4542974	7.45	69	113	D4542087	8.7	81	131
D4542075	7.5	69	113	D4542987	8.75	81	131
D4542975	7.55	75	119	D4542088	8.8	81	131
D4542076	7.6	75	119	D4542988	8.85	81	131
D4542976	7.65	75	119	D4542089	8.9	81	131
D4542077	7.7	75	119	D4542989	8.95	81	131
D4542977	7.75	75	119	D4542090	9.0	81	131
D4542078	7.8	75	119	D4542990	9.05	81	131
D4542978	7.85	75	119	D4542091	9.1	81	131
D4542079	7.9	75	119	D4542991	9.15	81	131
D4542979	7.95	75	119	D4542092	9.2	81	131
D4542080	8.0	75	119	D4542992	9.25	81	131
D4542980	8.05	75	125	D4542093	9.3	81	131
D4542081	8.1	75	125	D4542993	9.35	81	131
D4542981	8.15	75	125	D4542094	9.4	81	131
D4542082	8.2	75	125	D4542994	9.45	81	131

► TiCN(D7542), TiAlN(DQ542) are available on your request.

◎ : Excellent ○ : Good

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		Cast Iron	Aluminum	Stainless Steels	Titanium	Mild Steels	Copper	Bronze	CFRP
~HB225	HB225~325	HRc30~45	HRc45~55	HRc55~								
◎	◎	○			○	○	○	○				

**HPD DRILLS****D4542 SERIES**


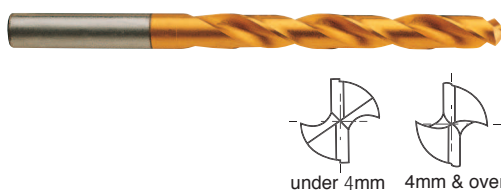
PREMIUM HSS COBALT, HPD TWIST DRILLS for STEELS

PREMIUM HSS KOBALT, HPD SPIRALBOHRER für STÄHLE

JOBBER**KURZ**

- **Application** : Designed for high speed non-step 4D ~ 5D drilling.
Drilling mild steels, cast iron, aluminum, alloyed tool steels, etc.
- **Advantage** : Helical thinning - good chip removal, self-centering, reducing thrust and improving accuracy.
Reinforced web and jobbers length - increasing rigidity and suitable for 4D~5D drilling
Premium Cobalt HSS with superior TiN coating - higher speed and feed, longer tool life
High quality & good surface finish, high productivity.

- **Anwendung** : Zum Hochgeschwindigkeitsbohren 4D~5D Bohrtiefe geeignet zum Bearbeiten von Stahl, Gusseisen, Aluminium, Legierungen, Werkzeugstahl, usw.
- **Vorteile** : Gute Spanabfuhr, selbstzentriert, geringere Abdrängung und verbesserte Genauigkeit, kurze Ausführung, verbesserte Stabilität, zum Bearbeiten von Premium kobalt HSS mit hochwertiger TiN-Beschichtung, höhere Geschwindigkeit und Vorschub, längere Standzeit, verbesserte Oberflächengüte und Produktivität.

PREMIUM
HSS-CoN
30°

h7

h6

h8

130°



P.156

D₁=D₂

up to 13mm over 13mm

Unit : mm

EDP No.	Drill Diameter	Flute Length	Overall Length
TiN	D ₁	L ₁	L ₂
D4542095	9.5	81	131
D4542995	9.55	87	137
D4542096	9.6	87	137
D4542996	9.65	87	137
D4542097	9.7	87	137
D4542997	9.75	87	137
D4542098	9.8	87	137
D4542998	9.85	87	137
D4542099	9.9	87	137
D4542999	9.95	87	137
D4542100	10.0	87	137
D4542800	10.05	87	144
D4542101	10.1	87	144
D4542801	10.15	87	144
D4542102	10.2	87	144
D4542802	10.25	87	144
D4542103	10.3	87	144
D4542803	10.35	87	144
D4542104	10.4	87	144
D4542804	10.45	87	144
D4542105	10.5	87	144
D4542805	10.55	87	144
D4542106	10.6	87	144
D4542806	10.65	94	151
D4542107	10.7	94	151

EDP No.	Drill Diameter	Flute Length	Overall Length
TiN	D ₁	L ₁	L ₂
D4542807	10.75	94	151
D4542108	10.8	94	151
D4542808	10.85	94	151
D4542109	10.9	94	151
D4542809	10.95	94	151
D4542110	11.0	94	151
D4542810	11.05	94	151
D4542111	11.1	94	151
D4542811	11.15	94	151
D4542112	11.2	94	151
D4542812	11.25	94	151
D4542113	11.3	94	151
D4542813	11.35	94	151
D4542114	11.4	94	151
D4542814	11.45	94	151
D4542115	11.5	94	151
D4542815	11.55	94	151
D4542116	11.6	94	151
D4542816	11.65	94	151
D4542117	11.7	94	151
D4542817	11.75	94	151
D4542118	11.8	94	151
D4542818	11.85	101	158
D4542119	11.9	101	158
D4542819	11.95	101	158

► TiCN(D7542), TiAlN(DQ542) are available on your request.

◎ : Excellent ○ : Good

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		Cast Iron	Aluminum	Stainless Steels	Titanium	Mild Steels	Copper	Bronze	CFRP
~HB225	HB225~325	HRc30~45	HRc45~55	HRc55~								
◎	◎	○			○	○	○	○				

CARBIDE

HSS

I-DREAM
DRILLSDREAM
DRILLS
-GENERALDREAM
DRILLS
-INOXDREAM
DRILLS
-ALUDREAM
DRILLS
-CFRPDREAM
DRILLS
-MQL TYPEDREAM
DRILLS
for HARDENED
STEELSGENERAL
CARBIDE
DRILLSNC-SPOTTING
DRILLSCENTER
DRILLSMULTI-1
DRILLS

HPD DRILLS

GOLD-P
DRILLSSTRAIGHT
SHANK
DRILLSTAPER
SHANK
DRILLSNC-SPOTTING
DRILLSCENTER
DRILLSSPADE
DRILLSTECHNICAL
DATA



PREMIUM HSS COBALT, HPD TWIST DRILLS for STEELS

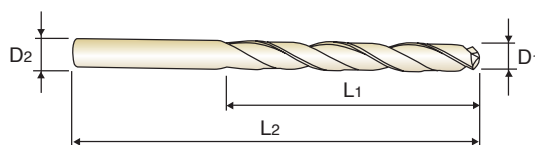

JOBBER

PREMIUM HSS KOBALT, HPD SPIRALBOHRER für STÄHLE

KURZ

- **Application** : Designed for high speed non-step 4D ~ 5D drilling.
Drilling mild steels, cast iron, aluminum, alloyed tool steels, etc.
- **Advantage** : Helical thinning - good chip removal, self-centering, reducing thrust and improving accuracy.
Reinforced web and jobbers length - increasing rigidity and suitable for 4D~5D drilling
Premium Cobalt HSS with superior TiN coating - higher speed and feed, longer tool life
High quality & good surface finish, high productivity.

- **Anwendung** : Zum Hochgeschwindigkeitsbohren 4D~5D
Bohrtiefe geeignet zum Bearbeiten von Stahl, Gusseisen, Aluminium, Legierungen, Werkzeugstahl, usw.
- **Vorteile** : Gute Spanabfuhr, selbstzentriert, geringere Abdrängung und verbesserte Genauigkeit, kurze Ausführung, verbesserte Stabilität, zum Bearbeiten von Premium kobalt HSS mit hochwertiger TiN-Beschichtung, höhere Geschwindigkeit und Vorschub, längere Standzeit, verbesserte Oberflächengüte und Produktivität.

PREMIUM
HSS-Co

P.156

D1=D2

up to 13mm over 13mm

Unit : mm

EDP No.	Drill Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Flute Length	Overall Length
TiN	D1	L1	L2	TiN	D1	L1	L2
D4542120	12.0	101	158	D4542190	19.0	118	194
D4542121	12.1	101	158	D4542195	19.5	125	201
D4542122	12.2	101	158	D4542196	19.6	125	201
D4542123	12.3	101	158	D4542200	20.0	125	201
D4542124	12.4	101	158	D4542205	20.5	128	204
D4542125	12.5	101	158	D4542210	21.0	128	204
D4542126	12.6	101	158	D4542211	21.1	128	204
D4542127	12.7	101	158	D4542215	21.5	132	208
D4542128	12.8	101	158	D4542220	22.0	132	208
D4542129	12.9	101	158	D4542225	22.5	136	212
D4542130	13.0	101	158	D4542230	23.0	136	212
D4542135	13.5	90	150	D4542235	23.5	136	212
D4542140	14.0	90	150	D4542240	24.0	140	220
D4542141	14.1	95	155	D4542245	24.5	140	220
D4542145	14.5	95	155	D4542250	25.0	140	220
D4542150	15.0	95	161	D4542255	25.5	145	225
D4542155	15.5	100	166	D4542260	26.0	145	225
D4542156	15.6	100	166	D4542265	26.5	145	225
D4542160	16.0	100	166	D4542270	27.0	150	230
D4542165	16.5	106	172	D4542280	28.0	150	230
D4542170	17.0	106	172	D4542290	29.0	155	235
D4542175	17.5	112	178	D4542300	30.0	155	235
D4542176	17.6	112	178	D4542310	31.0	160	240
D4542180	18.0	112	178	D4542320	32.0	165	245
D4542185	18.5	118	184				

► TiCN(D7542), TiAlN(DQ542) are available on your request.

◎ : Excellent ○ : Good

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		Cast Iron	Aluminum	Stainless Steels	Titanium	Mild Steels	Copper	Bronze	CFRP
~HB225	HB225~325	HRc30~45	HRc45~55	HRc55~								
◎	◎	○			○	○	○	○				



PREMIUM HSS COBALT, HPD TWIST DRILLS, TiN COATED PREMIUM HSS KOBALT, HPD SPIRALBOHRER, TiN-BESCHICHTET

D4541, D4542 SERIES

Please decrease the feed rate (15~20%) in D4542 SERIES HPD drills.
Den Vorschub in der D4542 Gruppe HPD Bohrer bitte verringern.

WORK MATERIAL	CARBON STEELS		ALLOY STEELS (SCM-SNC-SNCM)		TOOL STEELS ALLOY STEELS (SKD11)		CAST IRON TOOL STEELS		ALUMINUM ALLOYS MAGNESIUM ALLOYS	
DRILLING SPEED	20 ~ 25 m/min		20 ~ 25 m/min		8 ~ 13 m/min		35 ~ 40 m/min		80 ~ 100 m/min	
DIAMETER	N	S	N	S	N	S	N	S	N	S
2.0	4200	0.08	3600	0.08	1750	0.08	5800	0.11	10500	0.16
3.0	2900	0.13	2500	0.13	1170	0.13	4000	0.14	10500	0.25
4.0	2100	0.14	1900	0.14	880	0.14	3000	0.17	8000	0.30
5.0	1700	0.16	1500	0.16	700	0.16	2400	0.20	6500	0.36
6.0	1300	0.17	1300	0.17	580	0.17	2100	0.23	5200	0.42
8.0	1000	0.21	950	0.21	440	0.21	1500	0.26	4200	0.47
10.0	850	0.25	750	0.25	350	0.25	1100	0.32	3400	0.56
12.0	700	0.30	650	0.30	290	0.30	1000	0.38	2700	0.67
14.0	550	0.35	500	0.35	250	0.35	850	0.40	2400	0.72
16.0	520	0.38	470	0.38	220	0.38	750	0.42	2100	0.77
18.0	450	0.44	420	0.44	195	0.44	700	0.45	1900	0.80
20.0	400	0.45	350	0.45	175	0.45	600	0.51	1600	0.87
22.0	370	0.50	340	0.50	160	0.50	550	0.52	1500	0.95
24.0	350	0.54	300	0.54	145	0.54	500	0.58	1400	1.00
26.0	320	0.58	280	0.58	135	0.58	450	0.60	1300	1.05
28.0	300	0.62	260	0.62	125	0.62	420	0.63	1200	1.10
30.0	280	0.66	240	0.66	115	0.66	400	0.74	1100	1.15
32.0	260	0.70	230	0.70	110	0.70	380	0.74	950	1.20

N = R.P.M
S = Feed per Revolution (mm/rev.)

HSS-EX, HPD-SUS TWIST DRILLS, TiN COATED HSS-EX, HPD-SUS SPIRALBOHRER, TiN-BESCHICHTET

DJ543, DJ544 SERIES

Please decrease the feed rate (15~20%) in DJ544 SERIES HPD-SUS drills.
Den Vorschub in der DJ544 Gruppe HPD-SUS Bohrer bitte verringern

WORK MATERIAL	STAINLESS STEELS (SUS304, 200)		STAINLESS STEELS (SUS420, 440)		ALUMINUM & ALUMINIUM ALLOYS		PLASTICS COPPER COPPER ALLOYS		MILD STEELS LOW CARBON STEELS	
DRILLING SPEED	13 ~ 18 m/min		15 ~ 20 m/min		70 ~ 90 m/min		30 ~ 35 m/min		30 ~ 40 m/min	
DIAMETER	N	S	N	S	N	S	N	S	N	S
2.0	2600	0.03	3100	0.07	11000	0.09	5600	0.06	6300	0.08
3.0	1800	0.04	2100	0.08	7350	0.13	3750	0.08	4200	0.13
4.0	1300	0.06	1600	0.10	7050	0.18	2800	0.10	3200	0.14
5.0	1050	0.08	1250	0.15	5500	0.22	2250	0.13	2500	0.16
6.0	900	0.09	1050	0.18	4600	0.26	1850	0.15	2100	0.18
8.0	650	0.12	800	0.24	3500	0.34	1350	0.20	1550	0.22
10.0	550	0.15	630	0.30	2800	0.40	1100	0.25	1250	0.26
12.0	450	0.18	530	0.36	2300	0.50	950	0.30	1050	0.32
14.0	400	0.33	450	0.44	2050	0.55	800	0.33	900	0.36
16.0	350	0.36	390	0.48	1750	0.62	700	0.35	790	0.40
18.0	300	0.39	350	0.50	1600	0.70	620	0.40	700	0.45
20.0	260	0.43	320	0.53	1450	0.75	560	0.40	620	0.47

N = R.P.M
S = Feed per Revolution (mm/rev.)