

CARBIDE DREAM DRILLS - HIGH FEED - **Test Report**

with COOLANT HOLES

● **FEATURES OF DREAM DRILL HIGH FEED**

Dream Drill High Feed offers 1.5 to 2 times higher feeding speed compared to conventional 2-flute drill. The unique flute design and exceptional surface finish promise extraordinary chip evacuation.


YG-1 (Total Drilling 330 Holes)



COMPETITOR A (Total Drilling 330 Holes)



COMPETITOR B (Total Drilling 330 Holes)

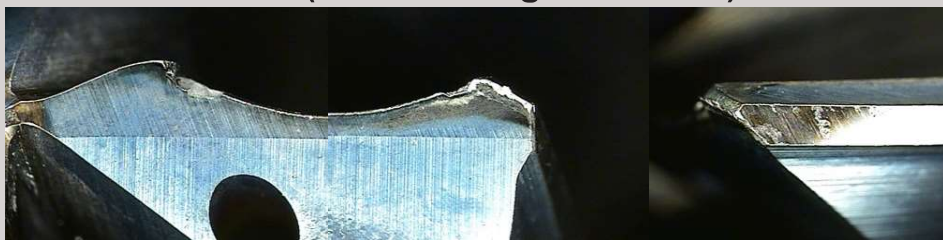

Cutting Condition

Tools : DGR495100

(Dream Drill High Feed)

Size : Ø10.0 x 10 x 61 x 103

Work Material : • JIS : S45C (HRc20)

• DIN: C45

• WR: 1.0503

R.P.M : 3,200 rev./min.

Feed : .0.5 mm/rev.

Drilling Depth : 50 mm (5xD)

Drilling Method : Blind Hole


Coolant : Wet Cut

Machine : Machining Center

Productivity (Carbon Steel)


Ø 10.0 5xD

1.6 times UP

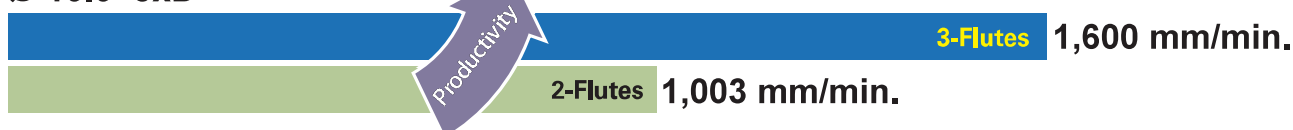

**CARBIDE DREAM DRILLS - HIGH FEED with COOLANT HOLES**

- Application : Carbon Steels, Alloy Steels (~ HRC35), Cast Iron
 ► Advantage : Increases productivity due to 1.5 to 2 times faster feeding speed than 2-flute drill
 Multi-Layer coating delivers much better productivity and reliability.
 Self-Centering

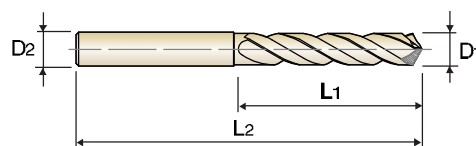DIN
6537

MG

h6

m7

140°

20 bar



P.20

DREAM DRILLS **HIGH FEED** | **3 × D**

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
H-Coating	D1	D2	L1	L2	H-Coating	D1	D2	L1	L2
DGR493050	5.0	6	28	66	DGR493085	8.5	10	47	89
DGR493051	5.1	6	28	66	DGR493090	9.0	10	47	89
DGR493052	5.2	6	28	66	DGR493100	10.0	10	47	89
DGR493053	5.3	6	28	66	DGR493102	10.2	12	55	102
DGR493055	5.5	6	28	66	DGR493105	10.5	12	55	102
DGR493058	5.8	6	28	66	DGR493110	11.0	12	55	102
DGR493060	6.0	6	28	66	DGR493120	12.0	12	55	102
DGR493065	6.5	8	34	79	DGR493130	13.0	14	60	107
DGR493068	6.8	8	34	79	DGR493140	14.0	14	60	107
DGR493070	7.0	8	34	79	DGR493150	15.0	16	65	115
DGR493080	8.0	8	41	79	DGR493160	16.0	16	65	115

► Other shank types are available on your request.

◎ : Excellent ○ : Good

P					M	K	N		S	
Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		Mild Steels	Stainless Steels	Cast Iron	Aluminum	CFRP	Titanium
~HB225	HB225~325	HRC30~45	HRC45~55	HRC55~						
										



SOLID CARBIDE DREAM DRILLS - HIGH FEED with COOLANT HOLES

DGR493, DGR495 Series

Unit : mm

WORK MATERIAL	P						K					
	CARBON STEELS, ALLOY STEELS			ALLOY STEELS			CAST IRON			DUCTILE CAST IRON		
HARDNESS	~ HRc 20			HRc 20 ~ 35			-			-		
DRILLING SPEED	100 m/min			75 m/min			100 m/min			80 m/min		
DIAMETER	RPM	FEED		RPM	FEED		RPM	FEED		RPM	FEED	
		Min	Max		Min	Max		Min	Max		Min	Max
5.0	6370	0.20	0.25	4780	0.20	0.25	6370	0.23	0.30	5100	0.20	0.25
6.0	5310	0.24	0.30	3980	0.24	0.30	5310	0.27	0.36	4250	0.24	0.30
7.0	4550	0.28	0.35	3420	0.28	0.35	4550	0.32	0.42	3640	0.28	0.35
8.0	3980	0.32	0.40	2990	0.32	0.40	3980	0.36	0.48	3190	0.32	0.40
9.0	3540	0.36	0.45	2660	0.36	0.45	3540	0.41	0.54	2840	0.36	0.45
10.0	3190	0.40	0.50	2390	0.40	0.50	3190	0.45	0.60	2550	0.40	0.50
11.0	2900	0.44	0.55	2180	0.44	0.50	2900	0.50	0.66	2320	0.44	0.55
12.0	2660	0.48	0.60	2000	0.48	0.54	2660	0.54	0.72	2130	0.48	0.60
13.0	2450	0.52	0.65	1840	0.52	0.59	2450	0.59	0.78	1960	0.52	0.65
14.0	2280	0.56	0.70	1710	0.56	0.63	2280	0.63	0.84	1820	0.56	0.70
16.0	1990	0.56	0.72	1500	0.56	0.64	1990	0.64	0.80	1600	0.56	0.72

N = R.P.M
S = Feed per Revolution (mm/rev.)