




**CARBIDE, DREAM DRILLS
VOLLHARTMETALL DREAM SPIRALBOHRER**

**STUB
EXTRA KURZ**

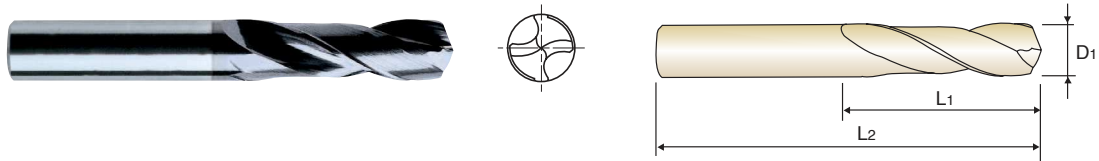

D₁=D₂

3 × D

Unit : mm

| EDP No. | Drill Diameter | Flute Length | Overall Length | EDP No. | Drill Diameter | Flute Length | Overall Length |
|----------|----------------|----------------|----------------|----------|----------------|----------------|----------------|
| TiAlN | D ₁ | L ₁ | L ₂ | TiAlN | D ₁ | L ₁ | L ₂ |
| DH404030 | 3.0 | 16 | 46 | DH404057 | 5.7 | 28 | 66 |
| DH404031 | 3.1 | 18 | 49 | DH404058 | 5.8 | 28 | 66 |
| DH404032 | 3.2 | 18 | 49 | DH404059 | 5.9 | 28 | 66 |
| DH404033 | 3.3 | 18 | 49 | DH404060 | 6.0 | 28 | 66 |
| DH404034 | 3.4 | 20 | 52 | DH404061 | 6.1 | 31 | 70 |
| DH404035 | 3.5 | 20 | 52 | DH404062 | 6.2 | 31 | 70 |
| DH404036 | 3.6 | 20 | 52 | DH404063 | 6.3 | 31 | 70 |
| DH404037 | 3.7 | 20 | 52 | DH404064 | 6.4 | 31 | 70 |
| DH404038 | 3.8 | 22 | 55 | DH404065 | 6.5 | 31 | 70 |
| DH404039 | 3.9 | 22 | 55 | DH404066 | 6.6 | 31 | 70 |
| DH404040 | 4.0 | 22 | 55 | DH404067 | 6.7 | 31 | 70 |
| DH404041 | 4.1 | 22 | 55 | DH404068 | 6.8 | 34 | 74 |
| DH404042 | 4.2 | 22 | 55 | DH404069 | 6.9 | 34 | 74 |
| DH404043 | 4.3 | 24 | 58 | DH404070 | 7.0 | 34 | 74 |
| DH404044 | 4.4 | 24 | 58 | DH404071 | 7.1 | 34 | 74 |
| DH404045 | 4.5 | 24 | 58 | DH404072 | 7.2 | 34 | 74 |
| DH404046 | 4.6 | 24 | 58 | DH404073 | 7.3 | 34 | 74 |
| DH404047 | 4.7 | 24 | 58 | DH404074 | 7.4 | 34 | 74 |
| DH404048 | 4.8 | 26 | 62 | DH404075 | 7.5 | 34 | 74 |
| DH404049 | 4.9 | 26 | 62 | DH404076 | 7.6 | 37 | 79 |
| DH404050 | 5.0 | 26 | 62 | DH404077 | 7.7 | 37 | 79 |
| DH404051 | 5.1 | 26 | 62 | DH404078 | 7.8 | 37 | 79 |
| DH404052 | 5.2 | 26 | 62 | DH404079 | 7.9 | 37 | 79 |
| DH404053 | 5.3 | 26 | 62 | DH404080 | 8.0 | 37 | 79 |
| DH404054 | 5.4 | 28 | 66 | DH404081 | 8.1 | 37 | 79 |
| DH404055 | 5.5 | 28 | 66 | DH404082 | 8.2 | 37 | 79 |
| DH404056 | 5.6 | 28 | 66 | DH404083 | 8.3 | 37 | 79 |

► Other shank types are available on your request.

◎ : Excellent ○ : Good

| Carbon Steels | Alloy Steels | Prehardened Steels | Hardened Steels | | Cast Iron | Aluminum | Stainless Steels | Titanium | Mild Steels | Copper | Bronze | CFRP |
|---------------|--------------|--------------------|-----------------|--------|-----------|----------|------------------|----------|-------------|--------|--------|------|
| ~HB225 | HB225~325 | HRc30~45 | HRc45~55 | HRc55~ | | | | | | | | |
| ○ | ◎ | ◎ | | | ○ | ◎ | ○ | | | | | |

**CARBIDE, DREAM DRILLS
VOLLHARTMETALL DREAM SPIRALBOHRER**
**STUB
EXTRA KURZ**

 $D_1 = D_2$
 $3 \times D$

Unit : mm

| EDP No. | Drill Diameter | Flute Length | Overall Length | EDP No. | Drill Diameter | Flute Length | Overall Length |
|----------|----------------|--------------|----------------|----------|----------------|--------------|----------------|
| TiAlN | D1 | L1 | L2 | TiAlN | D1 | L1 | L2 |
| DH404084 | 8.4 | 37 | 79 | DH404110 | 11.0 | 47 | 95 |
| DH404085 | 8.5 | 37 | 79 | DH404115 | 11.5 | 47 | 95 |
| DH404086 | 8.6 | 40 | 84 | DH404120 | 12.0 | 51 | 102 |
| DH404087 | 8.7 | 40 | 84 | DH404130 | 13.0 | 51 | 102 |
| DH404088 | 8.8 | 40 | 84 | DH404135 | 13.5 | 54 | 107 |
| DH404089 | 8.9 | 40 | 84 | DH404140 | 14.0 | 54 | 107 |
| DH404090 | 9.0 | 40 | 84 | DH404145 | 14.5 | 56 | 111 |
| DH404091 | 9.1 | 40 | 84 | DH404150 | 15.0 | 56 | 111 |
| DH404092 | 9.2 | 40 | 84 | DH404155 | 15.5 | 58 | 115 |
| DH404093 | 9.3 | 40 | 84 | DH404160 | 16.0 | 58 | 115 |
| DH404094 | 9.4 | 40 | 84 | DH404165 | 16.5 | 60 | 119 |
| DH404095 | 9.5 | 40 | 84 | DH404170 | 17.0 | 60 | 119 |
| DH404096 | 9.6 | 43 | 89 | DH404175 | 17.5 | 62 | 123 |
| DH404097 | 9.7 | 43 | 89 | DH404180 | 18.0 | 62 | 123 |
| DH404098 | 9.8 | 43 | 89 | DH404185 | 18.5 | 64 | 127 |
| DH404099 | 9.9 | 43 | 89 | DH404190 | 19.0 | 64 | 127 |
| DH404100 | 10.0 | 43 | 89 | DH404195 | 19.5 | 66 | 131 |
| DH404102 | 10.2 | 43 | 89 | DH404200 | 20.0 | 66 | 131 |
| DH404105 | 10.5 | 43 | 89 | | | | |

▶ Other shank types are available on your request.

◎ : Excellent ○ : Good

| Carbon Steels | Alloy Steels | Prehardened Steels | Hardened Steels | | Cast Iron | Aluminum | Stainless Steels | Titanium | Mild Steels | Copper | Bronze | CFRP |
|---------------|--------------|--------------------|-----------------|--------|-----------|----------|------------------|----------|-------------|--------|--------|------|
| ~HB225 | HB225~325 | HRc30~45 | HRc45~55 | HRc55~ | | | | | | | | |
| ○ | ◎ | ◎ | | | ○ | | ○ | | | | | |



DREAM DRILLS -GENERAL

**RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDKONDITIONEN**

**CARBIDE, DREAM DRILLS, TiAIN COATED
VOLLHARTMETALL DREAM BOHRER, TiAIN-BESCHICHTET**

DH404, DH423, DH424 SERIES

| WORK MATERIAL | NON-ALLOY STEELS | | ALLOY STEELS | | SOFT GREY CAST IRON | | HARD GREY CAST IRON | |
|----------------|---|------|--|------|--|------|---|------|
| STRENGTH | < 700 N/mm ² | | < 1000 N/mm ² | | < HB240, GG25 | | < HB300, GG40 | |
| DRILLING SPEED | Ø1.0 ~ Ø2.9 : 40 ~ 80 m/min Ø3.0 ~ : 100 ~ 120 m/min | | Ø1.0 ~ Ø2.9 : 35 ~ 70 m/min Ø3.0 ~ : 85 ~ 105 m/min | | Ø1.0 ~ Ø2.9 : 60 ~ 130 m/min Ø3.0 ~ : 180 ~ 200 m/min | | Ø1.0 ~ Ø2.9 : 40 ~ 90 m/min Ø3.0 ~ : 110 ~ 130 m/min | |
| DIAMETER | N | S | N | S | N | S | N | S |
| 1.0 | 13000 | 0.04 | 11250 | 0.04 | 21300 | 0.04 | 14200 | 0.04 |
| 2.0 | 13000 | 0.06 | 11250 | 0.06 | 21300 | 0.06 | 14200 | 0.06 |
| 3.0 | 13000 | 0.13 | 11000 | 0.13 | 21000 | 0.13 | 14000 | 0.13 |
| 4.0 | 9500 | 0.14 | 8400 | 0.14 | 16000 | 0.14 | 10500 | 0.14 |
| 5.0 | 7600 | 0.15 | 6700 | 0.15 | 13000 | 0.15 | 8300 | 0.15 |
| 6.0 | 6400 | 0.17 | 5600 | 0.17 | 11000 | 0.17 | 6900 | 0.17 |
| 7.0 | 5500 | 0.19 | 4800 | 0.19 | 9100 | 0.19 | 5900 | 0.19 |
| 8.0 | 4800 | 0.21 | 4200 | 0.21 | 8000 | 0.21 | 5200 | 0.21 |
| 9.0 | 4200 | 0.23 | 3700 | 0.23 | 7100 | 0.23 | 4600 | 0.23 |
| 10.0 | 3800 | 0.25 | 3350 | 0.25 | 6400 | 0.25 | 4150 | 0.25 |
| 12.0 | 3200 | 0.27 | 2800 | 0.27 | 5300 | 0.27 | 3450 | 0.27 |
| 14.0 | 2750 | 0.29 | 2400 | 0.29 | 4550 | 0.29 | 3000 | 0.29 |
| 16.0 | 2400 | 0.31 | 2100 | 0.31 | 4000 | 0.31 | 2600 | 0.31 |
| 18.0 | 2100 | 0.33 | 1850 | 0.33 | 3550 | 0.33 | 2300 | 0.33 |
| 20.0 | 1900 | 0.35 | 1650 | 0.35 | 3200 | 0.35 | 2100 | 0.35 |

► Recommend to reduce the feed rate as following

Feed 100% : DH404(3×D), DH423(3×D)
Feed 85% : DH424(5×D)

N = R.P.M
S = Feed per Revolution (mm/rev.)

**CARBIDE, DREAM DRILLS with COOLANT HOLES DIN6537, TiAIN COATED
VOLLHARTMETALL DREAM BOHRER mit KÜHLKANAL DIN6537, TiAIN-BESCHICHTET**

DH406, DH408, DH421 SERIES

| WORK MATERIAL | NON-ALLOY STEELS | | ALLOY STEELS | | SOFT GREY CAST IRON | | HARD GREY CAST IRON | |
|----------------|--|------|---|------|--|------|--|------|
| STRENGTH | < 700 N/mm ² | | < 1000 N/mm ² | | < HB240, GG25 | | < HB300, GG40 | |
| DRILLING SPEED | Ø1.0 ~ Ø2.9 : 50 ~ 100 m/min Ø3.0 ~ : 130 ~ 150 m/min | | Ø1.0 ~ Ø2.9 : 40 ~ 90 m/min Ø3.0 ~ : 115 ~ 135 m/min | | Ø1.0 ~ Ø2.9 : 80 ~ 160 m/min Ø3.0 ~ : 230 ~ 250 m/min | | Ø1.0 ~ Ø2.9 : 50 ~ 100 m/min Ø3.0 ~ : 140 ~ 160 m/min | |
| DIAMETER | N | S | N | S | N | S | N | S |
| 1.0 | 16250 | 0.05 | 14800 | 0.05 | 26600 | 0.05 | 17300 | 0.05 |
| 2.0 | 16250 | 0.07 | 14800 | 0.07 | 26600 | 0.07 | 17300 | 0.07 |
| 3.0 | 16000 | 0.16 | 14500 | 0.16 | 26000 | 0.16 | 17000 | 0.16 |
| 4.0 | 12000 | 0.17 | 11000 | 0.17 | 20000 | 0.17 | 13000 | 0.17 |
| 5.0 | 9550 | 0.18 | 8600 | 0.18 | 16000 | 0.18 | 10000 | 0.18 |
| 6.0 | 8000 | 0.20 | 7200 | 0.20 | 13000 | 0.20 | 8500 | 0.20 |
| 7.0 | 6800 | 0.22 | 6100 | 0.22 | 11500 | 0.22 | 7300 | 0.22 |
| 8.0 | 6000 | 0.24 | 5400 | 0.24 | 9900 | 0.24 | 6400 | 0.24 |
| 9.0 | 5300 | 0.27 | 4800 | 0.27 | 8800 | 0.27 | 5700 | 0.27 |
| 10.0 | 4800 | 0.30 | 4300 | 0.30 | 8000 | 0.30 | 5100 | 0.30 |
| 12.0 | 4000 | 0.33 | 3600 | 0.33 | 6600 | 0.33 | 4250 | 0.33 |
| 14.0 | 3400 | 0.36 | 3050 | 0.36 | 5700 | 0.36 | 3650 | 0.36 |
| 16.0 | 3000 | 0.39 | 2700 | 0.39 | 5000 | 0.39 | 3200 | 0.39 |
| 18.0 | 2650 | 0.42 | 2400 | 0.42 | 4400 | 0.42 | 2850 | 0.42 |
| 20.0 | 2400 | 0.45 | 2150 | 0.45 | 4000 | 0.45 | 2550 | 0.45 |

► Recommend to reduce the feed rate as following

Feed 100% : DH406(3×D)
Feed 85% : DH408(5×D)
Feed 70% : DH421(8×D)

N = R.P.M
S = Feed per Revolution (mm/rev.)