


HSSCo8, 2 FLUTE LONG LENGTH
HSSCo8, 2 SCHNEIDEN LANG

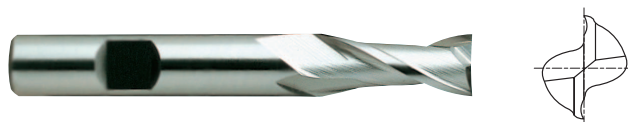

HSS Co8
DIN 844
N
2
≈ 30°
DIN 1835B
P.1231, 1232

Unit : mm

EDP No.	ITEM No.	EDP No.	ITEM No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
UNCOATED	UNCOATED	TiAIN	TiAIN	e8	h6		
E2571015	C2GLS-015AF	EQ571015	R2GLS-015AF	1.5	6	7	51
E2571020	C2GLS-020AF	EQ571020	R2GLS-020AF	2.0	6	7	51
E2571025	C2GLS-025AF	EQ571025	R2GLS-025AF	2.5	6	8	52
E2571030	C2GLS-030AF	EQ571030	R2GLS-030AF	3.0	6	8	52
E2571035	C2GLS-035AF	EQ571035	R2GLS-035AF	3.5	6	10	54
E2571040	C2GLS-040AF	EQ571040	R2GLS-040AF	4.0	6	11	55
E2571045	C2GLS-045AF	EQ571045	R2GLS-045AF	4.5	6	11	55
E2571050	C2GLS-050AF	EQ571050	R2GLS-050AF	5.0	6	13	57
E2571055	C2GLS-055AF	EQ571055	R2GLS-055AF	5.5	6	13	57
E2571060	C2GLS-060AF	EQ571060	R2GLS-060AF	6.0	6	13	57
E2571065	C2GLS-065TF	EQ571065	R2GLS-065TF	6.5	10	16	66
E2571070	C2GLS-070TF	EQ571070	R2GLS-070TF	7.0	10	16	66
E2571075	C2GLS-075TF	EQ571075	R2GLS-075TF	7.5	10	16	66
E2571080	C2GLS-080TF	EQ571080	R2GLS-080TF	8.0	10	19	69
E2571085	C2GLS-085TF	EQ571085	R2GLS-085TF	8.5	10	19	69
E2571090	C2GLS-090TF	EQ571090	R2GLS-090TF	9.0	10	19	69
E2571095	C2GLS-095TF	EQ571095	R2GLS-095TF	9.5	10	19	69
E2571100	C2GLS-100TF	EQ571100	R2GLS-100TF	10.0	10	22	72
E2571110	C2GLS-110DF	EQ571110	R2GLS-110DF	11.0	12	22	79
E2571120	C2GLS-120DF	EQ571120	R2GLS-120DF	12.0	12	26	83
E2571130	C2GLS-130DF	EQ571130	R2GLS-130DF	13.0	12	26	83
E2571140	C2GLS-140DF	EQ571140	R2GLS-140DF	14.0	12	26	83
E2571150	C2GLS-150DF	EQ571150	R2GLS-150DF	15.0	12	26	83
E2571160	C2GLS-160EF	EQ571160	R2GLS-160EF	16.0	16	32	92
E2571180	C2GLS-180EF	EQ571180	R2GLS-180EF	18.0	16	32	92

◎ : Excellent ○ : Good

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		High Hardened Steels	Copper	Graphite	Cast Iron	Aluminum	Stainless Steels	Titanium	Inconel	Acrylic	CFRP
~HB225	HB225~325	HRc30~40	HRc40~45	HRc45~55	HRc55~70									
◎	◎	○							○					

- CARBIDE
- HSS
- CBN END MILLS
- i-Xmill END MILLS
- i-HS mill END MILLS
- X5070 END MILLS
- 4G MILL END MILLS
- X-SPEED ROUGHER END MILLS
- X-POWER END MILLS
- JET-POWER END MILLS
- TN MILL END MILLS
- V7 Mill END MILLS
- ALU-POWER END MILLS
- CRX S END MILLS
- D-POWER GRAPHITE END MILLS
- D-POWER CFRP END MILLS
- ROUTERS
- K-2 CARBIDE END MILLS
- GENERAL CARBIDE END MILLS
- TANK-POWER END MILLS
- GENERAL HSS END MILLS
- MILLING CUTTERS
- TECHNICAL DATA



E2571 SERIES

FLAT SHANK
SEITLICHE MITNAHMEFLÄCHEN

EQ571 SERIES

FLAT SHANK
SEITLICHE MITNAHMEFLÄCHEN

HSSCo8, 2 FLUTE LONG LENGTH
HSSCo8, 2 SCHNEIDEN LANG



P.1231, 1232

Unit : mm

EDP No.	ITEM No.	EDP No.	ITEM No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
UNCOATED	UNCOATED	TiAIN	TiAIN	e8	h6		
E2571200	C2GLS-200FF	EQ571200	R2GLS-200FF	20.0	20	38	104
E2571220	C2GLS-220FF	EQ571220	R2GLS-220FF	22.0	20	38	104
E2571240	C2GLS-240GF	EQ571240	R2GLS-240GF	24.0	25	45	121
E2571250	C2GLS-250GF	EQ571250	R2GLS-250GF	25.0	25	45	121
E2571260	C2GLS-260GF	EQ571260	R2GLS-260GF	26.0	25	45	121
E2571270	C2GLS-270GF	EQ571270	R2GLS-270GF	27.0	25	45	121
E2571280	C2GLS-280GF	EQ571280	R2GLS-280GF	28.0	25	45	121
E2571300	C2GLS-300GF	EQ571300	R2GLS-300GF	30.0	25	45	121
E2571320	C2GLS-320HF	EQ571320	R2GLS-320HF	32.0	32	53	133
E2571400	C2GLS-400IF	EQ571400	R2GLS-400IF	40.0	40	63	155

- ▶ Other shank design on your request.
- ▶ TiN-COATING & TiCN-COATING are available on your request.

Tolerances according to DIN 7160 & 7161
Toleranzen nach DIN 7160 & 7161

Tolerance range in μm / Toleranzwerte in μm						
Nominal-Diameter in mm / Nennmaßbereich in mm						
	from 1 to 3 von 1 bis 3	over 3 to 6 über 3 bis 6	over 6 to 10 über 6 bis 10	over 10 to 18 über 10 bis 18	over 18 to 30 über 18 bis 30	over 30 to 50 über 30 bis 50
e8	- 14 - 28	- 20 - 38	- 25 - 47	- 32 - 59	- 40 - 73	- 50 - 89
h6	0 - 6	0 - 8	0 - 9	0 - 11	0 - 13	0 - 16

◎ : Excellent ○ : Good

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		High Hardened Steels	Copper	Graphite	Cast Iron	Aluminum	Stainless Steels	Titanium	Inconel	Acrylic	CFRP
~HB225	HB225~325	HRC30~40	HRc40~45	HRc45~55	HRc55~70									
◎	◎	○							○					

HSSCo8, 2 FLUTE - SLOTTING
HSSCo8, 2 SCHNEIDEN - NUTENFRÄSEN

CBN
END MILLS

i-Xmill
END MILLS

i-HS mill
END MILLS

X5070
END MILLS

4G MILL
END MILLS

X-SPEED
ROUGHER
END MILLS

X-POWER
END MILLS

JET-POWER
END MILLS

TN MILL
END MILLS

V7 Mill
END MILLS

ALU-POWER
END MILLS

CRX S
END MILLS

D-POWER
GRAPHITE
END MILLS

D-POWER
CFRP
END MILLS

ROUTERS

K-2 CARBIDE
END MILLS

GENERAL
CARBIDE
END MILLS

TANK-POWER
END MILLS

GENERAL
HSS
END MILLS


MILLING
CUTTERS

TECHNICAL
DATA

E2570, E2571, E2510 SERIES

MATERIAL	CARBON STEELS ALLOY STEELS TOOL STEELS				CARBON STEELS ALLOY STEELS TOOL STEELS				CARBON STEELS ALLOY STEELS TOOL STEELS			
HARDNESS	~ 500N/mm ²				~ HRC20				HRc20 ~ HRc30			
STRENGTH	~ 500N/mm ²				500 ~ 800N/mm ²				800 ~ 1000N/mm ²			
DIAMETER	RPM	FEED	Vc	fz	RPM	FEED	Vc	fz	RPM	FEED	Vc	fz
2.0	5600	40	35	0.004	4500	30	30	0.003	4000	30	25	0.004
3.0	3500	55	35	0.008	3200	45	30	0.007	2500	40	25	0.008
4.0	2800	70	35	0.013	2200	55	30	0.013	1800	45	25	0.013
5.0	2200	90	35	0.020	1800	70	30	0.019	1600	60	25	0.019
6.0	1800	90	35	0.025	1600	80	30	0.025	1200	60	25	0.025
8.0	1400	100	35	0.036	1100	90	30	0.041	900	70	25	0.039
10.0	1100	100	35	0.045	900	90	30	0.050	800	80	25	0.050
12.0	900	110	35	0.061	800	100	30	0.063	630	80	25	0.063
14.0	800	110	35	0.069	700	90	30	0.064	560	80	25	0.071
16.0	700	110	35	0.079	560	90	30	0.080	450	70	25	0.078
18.0	630	100	35	0.079	500	90	30	0.090	400	70	25	0.088
20.0	560	100	35	0.089	450	90	30	0.100	400	70	25	0.088
22.0	500	100	35	0.100	450	90	30	0.100	350	70	25	0.100
25.0	450	90	35	0.100	400	80	30	0.100	310	60	25	0.097
28.0	400	80	35	0.100	350	70	30	0.100	280	55	25	0.098
30.0	350	70	35	0.100	310	60	30	0.097	250	50	25	0.100
32.0	350	70	35	0.100	280	55	30	0.098	220	45	20	0.102
36.0	310	60	35	0.097	250	50	30	0.100	200	40	25	0.100
40.0	280	60	35	0.107	220	50	30	0.114	180	40	25	0.111

MATERIAL	CARBON STEELS ALLOY STEELS TOOL STEELS				ALUMINUM ALUMINUM ALLOYS			
HARDNESS	HRc30 ~ HRc40							
STRENGTH	1000 ~ 1300N/mm ²							
DIAMETER	RPM	FEED	Vc	fz	RPM	FEED	Vc	fz
2.0	2200	15	15	0.003	12000	160	75	0.007
3.0	1600	20	15	0.006	11000	250	105	0.011
4.0	1100	30	15	0.014	8000	290	100	0.018
5.0	900	35	15	0.019	6300	310	100	0.025
6.0	800	40	15	0.025	5600	310	105	0.028
8.0	560	45	15	0.040	4000	390	100	0.049
10.0	450	45	15	0.050	3100	400	95	0.065
12.0	400	50	15	0.063	2500	380	95	0.076
14.0	350	50	15	0.071	2200	350	95	0.080
16.0	280	45	15	0.080	2000	350	100	0.088
18.0	250	45	15	0.090	1800	350	100	0.097
20.0	220	45	15	0.102	1600	320	100	0.100
22.0	220	45	15	0.102	1400	300	95	0.107
25.0	180	35	15	0.097	1200	280	95	0.117
28.0	160	30	15	0.094	1100	270	95	0.123
30.0	160	30	15	0.094	1100	270	105	0.123
32.0	140	30	15	0.107	1000	240	100	0.120
36.0	120	25	15	0.104	900	220	100	0.122
40.0	110	25	15	0.114	800	200	100	0.125



※ The FEED, in long & extra long types, should be reduced by around 50%


RPM = rev./min.
FEED = mm/min.
Vc = m/min.
fz = mm/t

HSSCo8, 2 FLUTE TiAlN COATED - SLOTTING
HSSCo8, 2 SCHNEIDEN TiAlN-BESCHICHTET - NUTENFRÄSEN

E2570, E2571, E2510 SERIES

MATERIAL	CARBON STEELS ALLOY STEELS TOOL STEELS				CARBON STEELS ALLOY STEELS TOOL STEELS				CARBON STEELS ALLOY STEELS TOOL STEELS			
HARDNESS					~ HRC20				HRC20 ~ HRC30			
STRENGTH	~ 500N/mm ²				500 ~ 800N/mm ²				800 ~ 1000N/mm ²			
DIAMETER	RPM	FEED	Vc	fz	RPM	FEED	Vc	fz	RPM	FEED	Vc	fz
2.0	7850	55	50	0.004	6300	40	40	0.003	5600	40	35	0.004
3.0	4900	75	45	0.008	4500	65	40	0.007	3500	55	35	0.008
4.0	3900	100	50	0.013	3100	75	40	0.012	2500	65	30	0.013
5.0	3100	125	50	0.020	2500	100	40	0.020	2250	85	35	0.019
6.0	2500	125	45	0.025	2250	110	40	0.024	1700	85	30	0.025
8.0	1950	140	50	0.036	1550	125	40	0.040	1250	100	30	0.040
10.0	1550	140	50	0.045	1250	125	40	0.050	1100	110	35	0.050
12.0	1250	155	45	0.062	1100	140	40	0.064	900	110	35	0.061
14.0	1100	155	50	0.070	1000	125	45	0.063	800	110	35	0.069
16.0	1000	155	50	0.078	800	125	40	0.078	650	100	35	0.077
18.0	900	140	50	0.078	700	125	40	0.089	550	100	30	0.091
20.0	800	140	50	0.088	650	125	40	0.096	550	100	35	0.091
22.0	700	140	50	0.100	650	125	45	0.096	500	100	35	0.100
25.0	650	125	50	0.096	550	110	45	0.100	450	85	35	0.094
28.0	550	110	50	0.100	500	100	45	0.100	400	75	35	0.094
30.0	500	100	45	0.100	450	85	40	0.094	350	70	35	0.100
32.0	500	100	50	0.100	400	75	40	0.094	300	65	30	0.108
36.0	450	85	50	0.094	350	70	40	0.100	300	55	35	0.092
40.0	400	85	50	0.106	300	70	40	0.117	250	55	30	0.110

MATERIAL	CARBON STEELS ALLOY STEELS TOOL STEELS				ALUMINUM ALUMINUM ALLOYS			
HARDNESS	HRc30 ~ HRc40							
STRENGTH	1000 ~ 1300N/mm ²							
DIAMETER	RPM	FEED	Vc	fz	RPM	FEED	Vc	fz
2.0	3100	20	20	0.003	16800	225	105	0.007
3.0	2250	30	20	0.007	15400	350	145	0.011
4.0	1550	40	20	0.013	11200	405	140	0.018
5.0	1250	50	20	0.020	8800	435	140	0.025
6.0	1100	55	20	0.025	7850	435	150	0.028
8.0	800	65	20	0.041	5600	545	140	0.049
10.0	650	65	20	0.050	4350	560	135	0.064
12.0	550	70	20	0.064	3500	530	130	0.076
14.0	500	70	20	0.070	3100	490	135	0.079
16.0	400	65	20	0.081	2800	490	140	0.088
18.0	350	65	20	0.093	2500	490	140	0.098
20.0	300	65	20	0.108	2250	450	140	0.100
22.0	300	65	20	0.108	1950	420	135	0.108
25.0	250	50	20	0.100	1700	390	135	0.115
28.0	200	40	20	0.100	1550	380	135	0.123
30.0	200	40	20	0.100	1550	380	145	0.123
32.0	200	40	20	0.100	1400	335	140	0.120
36.0	150	35	15	0.117	1250	310	140	0.124
40.0	150	35	20	0.117	1100	280	140	0.127



*The FEED, in long & extra long types, should be reduced by around 50%

RPM = rev./min.
FEED = mm/min.
Vc = m/min.
fz = mm/t