



**HSS-E, SIDE AND FACE MILLING CUTTERS with STAGGERED TEETH**  
**HSS-E, SCHEIBENFRÄSER mit KREUZVERZAHNT**

► The type of cutter is recommended for slotting operations.  
The alternate spiral effectively counteracts all tendency to chatter.

► Dieser Typ ist zum Schlitzfräsen geeignet. Das alternierende Spiral wirkt allen Schnatterbewegungen entgegen.



P.1291

Unit : mm

EDP No.	Cutter Diameter	Width of Face	Internal Diameter	No. of Teeth
	D(js14)	S(k11)	d(H7)	
ML10205001	50.0	3	16	14
ML10205002	50.0	4	16	14
ML10205003	50.0	5	16	14
ML10205004	50.0	6	16	14
ML10205005	50.0	7	16	14
ML10205006	50.0	8	16	14
ML10205007	50.0	9	16	14
ML10205008	50.0	10	16	14
ML10206301	63.0	3	22	16
ML10206302	63.0	4	22	16
ML10206303	63.0	5	22	16
ML10206304	63.0	6	22	16
ML10206305	63.0	7	22	16
ML10206306	63.0	8	22	16
ML10206307	63.0	9	22	16
ML10206308	63.0	10	22	16
ML10206309	63.0	12	22	16
ML10206310	63.0	14	22	16
ML10206311	63.0	16	22	16
ML10206312	63.0	18	22	16
ML10208001	80.0	3	22	18
ML10208002	80.0	4	22	18
ML10208003	80.0	5	22	18
ML10208004	80.0	6	22	18
ML10208005	80.0	7	22	18
ML10208006	80.0	8	22	18
ML10208007	80.0	9	22	18
ML10208008	80.0	10	22	18

◎ : Excellent ○ : Good



Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		High Hardened Steels	Copper	Graphite	Cast Iron	Aluminum	Stainless Steels	Titanium	Inconel	Acrylic	CFRP
~HB225	HB225~325	HRc30~40	HRc40~45	HRc45~55	HRc55~70									
◎	◎	○							○					

# HSS-E, SIDE AND FACE MILLING CUTTERS with STAGGERED TEETH

## HSS-E, SCHEIBENFRÄSER mit KREUZVERZAHNT

► The type of cutter is recommended for slotting operations.  
The alternate spiral effectively counteracts all tendency to chatter.

► Dieser Typ ist zum Schlitzfräsen geeignet. Das alternierende Spiral wirkt allen Schnatterbewegungen entgegen.



EDP No.	Cutter Diameter	Width of Face	Internal Diameter	No. of Teeth
	D(js14)	S(k11)	d(H7)	Z
ML10208009	80.0	12	22	18
ML10208010	80.0	14	22	18
ML10208011	80.0	16	22	18
ML10208012	80.0	18	22	18
ML10208013	80.0	20	22	18
ML10208014	80.0	4	27	18
ML10208015	80.0	5	27	18
ML10208016	80.0	6	27	18
ML10208017	80.0	7	27	18
ML10208018	80.0	8	27	18
ML10208019	80.0	9	27	18
ML10208020	80.0	10	27	18
ML10208021	80.0	12	27	18
ML10208022	80.0	14	27	18
ML10208023	80.0	16	27	18
ML10208024	80.0	18	27	18
ML10208025	80.0	20	27	18
ML10210001	100.0	3	27	20
ML10210002	100.0	4	27	20
ML10210003	100.0	5	27	20
ML10210004	100.0	6	27	20
ML10210005	100.0	7	27	20
ML10210006	100.0	8	27	20
ML10210007	100.0	9	27	20
ML10210008	100.0	10	27	20
ML10210009	100.0	12	27	20
ML10210010	100.0	14	27	20
ML10210011	100.0	15	27	20



Unit : mm

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		High Hardened Steels	Copper	Graphite	Cast Iron	Aluminum	Stainless Steels	Titanium	Inconel	Acrylic	CFRP
~HB225	HB225~325	HRc30~40	HRc40~45	HRc45~55	HRc55~70									
◎	◎	○							○					

**HSS-E, SIDE AND FACE MILLING CUTTERS with STAGGERED TEETH**  
**HSS-E, SCHEIBENFRÄSER mit KREUZVERZAHNT**

▶ The type of cutter is recommended for slotting operations.  
The alternate spiral effectively counteracts all tendency to chatter.

▶ Dieser Typ ist zum Schlitzfräsen geeignet. Das alternierende Spiral wirkt allen Schnatterbewegungen entgegen.



P.1291

Unit : mm

EDP No.	Cutter Diameter	Width of Face	Internal Diameter	No. of Teeth
	D(js14)	S(k11)	d(H7)	
ML10210012	100.0	16	27	20
ML10210013	100.0	18	27	20
ML10210014	100.0	20	27	20
ML10210015	100.0	4	32	20
ML10210016	100.0	5	32	20
ML10210017	100.0	6	32	20
ML10210018	100.0	7	32	20
ML10210019	100.0	8	32	20
ML10210020	100.0	9	32	20
ML10210021	100.0	10	32	20
ML10210022	100.0	12	32	20
ML10210023	100.0	14	32	20
ML10210024	100.0	15	32	20
ML10210025	100.0	16	32	20
ML10210026	100.0	18	32	20
ML10210027	100.0	20	32	20
ML10212501	125.0	5	32	22
ML10212502	125.0	6	32	22
ML10212503	125.0	8	32	22
ML10212504	125.0	10	32	22
ML10212505	125.0	12	32	22
ML10212506	125.0	14	32	22
ML10212507	125.0	16	32	22
ML10212508	125.0	18	32	22
ML10212509	125.0	20	32	22
ML10216001	160.0	6	32	26
ML10216002	160.0	8	32	26
ML10216003	160.0	10	32	26

◎ : Excellent ○ : Good


Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		High Hardened Steels	Copper	Graphite	Cast Iron	Aluminum	Stainless Steels	Titanium	Inconel	Acrylic	CFRP
~HB225	HB225~325	HRc30~40	HRc40~45	HRc45~55	HRc55~70									
◎	◎	○							○					

# HSS-E, SIDE AND FACE MILLING CUTTERS with STAGGERED TEETH

## HSS-E, SCHEIBENFRÄSER mit KREUZVERZAHNT

► The type of cutter is recommended for slotting operations.  
The alternate spiral effectively counteracts all tendency to chatter.

► Dieser Typ ist zum Schlitzfräsen geeignet. Das alternierende Spiral wirkt allen Schnatterbewegungen entgegen.

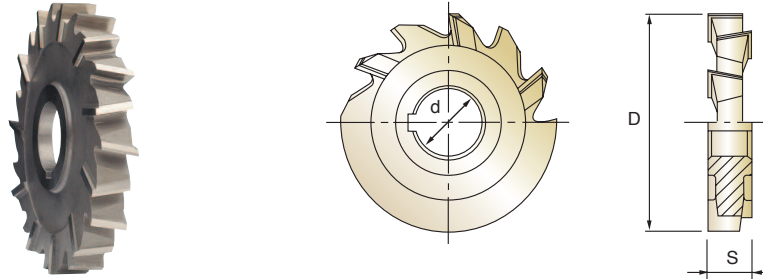


Unit : mm

EDP No.	Cutter Diameter	Width of Face	Internal Diameter	No. of Teeth
	D(js14)	S(k11)	d(H7)	Z
ML10216004	160.0	12	32	26
ML10216005	160.0	14	32	26
ML10216006	160.0	16	32	26
ML10216007	160.0	18	32	26
ML10216008	160.0	20	32	26
ML10216009	160.0	6	40	26
ML10216010	160.0	8	40	26
ML10216011	160.0	10	40	26
ML10216012	160.0	12	40	26
ML10216013	160.0	14	40	26
ML10216014	160.0	16	40	26
ML10216015	160.0	18	40	26
ML10216016	160.0	20	40	26
ML10220001	200.0	10	40	30
ML10220002	200.0	12	40	30
ML10220003	200.0	14	40	30
ML10220004	200.0	16	40	30
ML10220005	200.0	18	40	30
ML10220006	200.0	20	40	30
ML10220007	200.0	22	40	30
ML10220008	200.0	25	40	30

### Tolerances according to DIN 7160 & 7161

#### Toleranzen nach DIN 7160 & 7161

Nominal-Diameter in mm / Nennmaßbereich in mm									
	over 3 to 6 über 3 bis 6	over 6 to 10 über 6 bis 10	over 10 to 18 über 10 bis 18	over 18 to 30 über 18 bis 30	over 30 to 50 über 30 bis 50	over 50 to 80 über 50 bis 80	over 80 to 120 über 80 bis 120	over 120 to 180 über 120 bis 180	over 180 to 250 über 180 bis 250
Tolerance range in mm / Toleranzwerte in mm									
js14	± 0.15	± 0.18	± 0.215	± 0.26	± 0.31	± 0.37	± 0.435	± 0.50	± 0.575
Tolerance range in μm / Toleranzwerte in μm									
k11	+ 75 0	+ 90 0	+ 110 0	+ 130 0	+ 160 0	+ 190 0	+ 220 0	+ 250 0	+ 290 0
H7	+ 12 0	+ 15 0	+ 18 0	+ 21 0	+ 25 0	+ 30 0	+ 35 0	+ 40 0	+ 46 0



◎ : Excellent ○ : Good

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		High Hardened Steels	Copper	Graphite	Cast Iron	Aluminum	Stainless Steels	Titanium	Inconel	Acrylic	CFRP
~HB225	HB225~325	HRC30~40	HRC40~45	HRC45~55	HRC55~70									
◎	◎	○							○					


**HSS-E, SIDE AND FACE MILLING CUTTERS WITH STAGGERED TEETH**  
**HSS-E, SCHEIBENFRÄSER mit KREUZVERZAHNT**

**ML102 SERIES**

MATERIAL	CARBON STEELS ALLOY STEELS				CARBON STEELS ALLOY STEELS TOOL STEELS				CARBON STEELS ALLOY STEELS TOOL STEELS			
HARDNESS					~ HRC20				HRC20 ~ HRC30			
STRENGTH	~ 500N/mm <sup>2</sup>				500 ~ 800N/mm <sup>2</sup>				800 ~ 1000N/mm <sup>2</sup>			
DIAMETER	RPM	FEED	Vc	fz	RPM	FEED	Vc	fz	RPM	FEED	Vc	fz
50.0	160	130	25	0.058	115	85	20	0.053	95	58	15	0.044
63.0	125	160	25	0.080	90	75	20	0.052	75	51	15	0.043
80.0	100	145	25	0.081	70	69	20	0.055	60	48	15	0.044
100.0	80	130	25	0.081	60	60	20	0.050	47	41	15	0.044
125.0	63	100	25	0.072	45	54	20	0.055	38	38	15	0.045
160.0	50	105	25	0.081	37	48	20	0.050	30	34	15	0.044
200.0	40	95	25	0.079	31	45	20	0.048	25	31	15	0.041

MATERIAL	CARBON STEELS ALLOY STEELS TOOL STEELS				ALUMINUM & ALUMINUM ALLOYS			
HARDNESS	HRC30 ~ HRC40							
STRENGTH	1000 ~ 1300N/mm <sup>2</sup>							
DIAMETER	RPM	FEED	Vc	fz	RPM	FEED	Vc	fz
50.0	76	42	10	0.039	630	200	100	0.023
63.0	60	38	10	0.040	500	250	100	0.031
80.0	47	34	10	0.040	400	250	100	0.035
100.0	38	30	10	0.039	320	200	100	0.031
125.0	30	26	10	0.039	250	200	100	0.036
160.0	23	24	10	0.040	200	150	100	0.029
200.0	19	22	10	0.039	160	150	100	0.031

RPM = rev./min.  
 FEED = mm/min.  
 Vc = m/min.  
 fz = mm/t



MILLING DEPTH P = WIDTH OF FACES