


HSS-E, NC MACHINE REAMERS WITH WHOLE-NUMBER SHANK Ø

HSS-E, NC-MASCHINENREIBAHLEN mit GERADZÄHLIGEN SCHAFT Ø

- ▶ O.D. Tolerances
Whole-number Ø and 1/10 size : DIN 1420 for H7
1/100 size : from Ø2.01 to Ø5.03 : +0.004/-0.000mm
from Ø5.97 to Ø12.03 : +0.005/-0.000mm
- ▶ Shank Diameter Tolerances : h6
- ▶ LH Spiral Flutes / Right Hand Cut
- ▶ Chamfer Angle - Up to Ø3.75 : 15°
- Over Ø3.75 : 45°

- ▶ Ø Tolerances:
ganzzahlige Ø und 1/10 Größen : DIN 1420 für H7
1/100 Größen : ab Ø2,01 bis Ø5,03 : +0.004/-0.000mm
von Ø5,97 bis Ø12,03 : +0.005/-0.000mm
- ▶ Schaft-Durchmesser Toleranzen : h6
- ▶ linksspiralig/ rechtsscheidend
- ▶ Anschnittwinkel - bis Ø3,75 : 15°
- über Ø3,75 : 45°

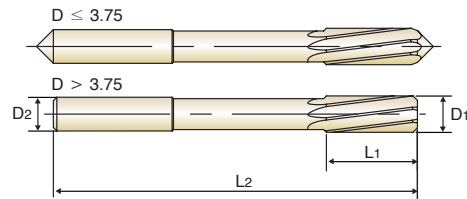

up to Ø3.75 over Ø3.75

1327

Hole type



Unit : mm



EDP No.	Nominal SIZE	Shank Diameter	Flute Length	Overall Length
	D1	D2	L1	L2
K21B100200	2.0	2	11	49
K21B100201	2.01	2	11	49
K21B100202	2.02	2	11	49
K21B100203	2.03	2	11	49
K21B100210	2.1	2	11	49
K21B100220	2.2	3	12	53
K21B100230	2.3	3	12	53
K21B100240	2.4	3	14	57
K21B100247	2.47	3	14	57
K21B100248	2.48	3	14	57
K21B100249	2.49	3	14	57
K21B100250	2.5	3	14	57
K21B100251	2.51	3	14	57
K21B100252	2.52	3	14	57
K21B100253	2.53	3	14	57
K21B100260	2.6	3	14	57
K21B100270	2.7	3	15	61
K21B100280	2.8	3	15	61
K21B100290	2.9	3	15	61
K21B100297	2.97	3	15	61
K21B100298	2.98	3	15	61
K21B100299	2.99	3	15	61
K21B100300	3.0	3	15	61
K21B100301	3.01	4	16	65
K21B100302	3.02	4	16	65
K21B100303	3.03	4	16	65
K21B100310	3.1	4	16	65
K21B100320	3.2	4	16	65
K21B100330	3.3	4	16	65
K21B100340	3.4	4	18	70
K21B100350	3.5	4	18	70
K21B100360	3.6	4	18	70
K21B100370	3.7	4	18	70
K21B100380	3.8	4	19	75
K21B100390	3.9	4	19	75
K21B100397	3.97	4	19	75
K21B100398	3.98	4	19	75

HSS-E, NC MACHINE REAMERS WITH WHOLE-NUMBER SHANK Ø

HSS-E, NC-MASCHINENREIBAHLEN mit GERADZÄHLIGEN SCHAFT Ø

- ▶ O.D. Tolerances
Whole-number Ø and 1/10 size : DIN 1420 for H7
1/100 size : from Ø2.01 to Ø5.03 : +0.004/-0.000mm
from Ø5.97 to Ø12.03 : +0.005/-0.000mm
- ▶ Shank Diameter Tolerances : h6
- ▶ LH Spiral Flutes / Right Hand Cut
- ▶ Chamfer Angle - Up to Ø3.75 : 15°
- Over Ø3.75 : 45°

- ▶ Ø Toleranzen:
ganzzahlige Ø und 1/10 Größen : DIN 1420 für H7
1/100 Größen : ab Ø2,01 bis Ø5,03 : +0.004/-0.000mm
von Ø5,97 bis Ø12,03 : +0.005/-0.000mm
- ▶ Schaft-Durchmesser Toleranzen : h6
- ▶ linksspiralig/ rechtsscheidend
- ▶ Anschnittwinkel - bis Ø3,75 : 15°
- über Ø3,75 : 45°

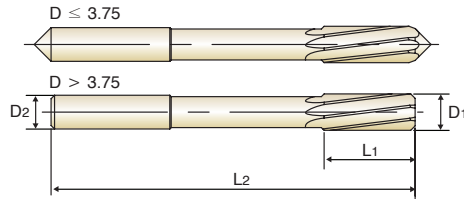

Unit : mm


EDP No.	Nominal SIZE	Shank Diameter	Flute Length	Overall Length
	D ₁	D ₂	L ₁	L ₂
K21B100399	3.99	4	19	75
K21B100400	4.0	4	19	75
K21B100401	4.01	4	19	75
K21B100402	4.02	4	19	75
K21B100403	4.03	4	19	75
K21B100410	4.1	4	19	75
K21B100420	4.2	4	19	75
K21B100430	4.3	5	21	80
K21B100440	4.4	5	21	80
K21B100450	4.5	5	21	80
K21B100460	4.6	5	21	80
K21B100470	4.7	5	21	80
K21B100480	4.8	5	23	86
K21B100490	4.9	5	23	86
K21B100497	4.97	5	23	86
K21B100498	4.98	5	23	86
K21B100499	4.99	5	23	86
K21B100500	5.0	5	23	86
K21B100501	5.01	5	23	86
K21B100502	5.02	5	23	86
K21B100503	5.03	5	23	86
K21B100510	5.1	5	23	86
K21B100520	5.2	5	23	86
K21B100530	5.3	5	23	86
K21B100540	5.4	6	26	93
K21B100550	5.5	6	26	93
K21B100560	5.6	6	26	93
K21B100570	5.7	6	26	93
K21B100580	5.8	6	26	93
K21B100590	5.9	6	26	93
K21B100597	5.97	6	26	93
K21B100598	5.98	6	26	93
K21B100599	5.99	6	26	93
K21B100600	6.0	6	26	93
K21B100601	6.01	6	28	101
K21B100602	6.02	6	28	101
K21B100603	6.03	6	28	101

HSS-E, NC MACHINE REAMERS WITH WHOLE-NUMBER SHANK Ø

HSS-E, NC-MASCHINENREIBAHLEN mit GERADZÄHLIGEN SCHAFT Ø

- ▶ O.D. Tolerances
Whole-number Ø and 1/10 size : DIN 1420 for H7
1/100 size : from Ø2.01 to Ø5.03 : +0.004/-0.000mm
from Ø5.97 to Ø12.03 : +0.005/-0.000mm
- ▶ Shank Diameter Tolerances : h6
- ▶ LH Spiral Flutes / Right Hand Cut
- ▶ Chamfer Angle - Up to Ø3.75 : 15°
- Over Ø3.75 : 45°

- ▶ Ø Tolerances:
ganzahlige Ø und 1/10 Größen : DIN 1420 für H7
1/100 Größen : ab Ø2,01 bis Ø5,03 : +0.004/-0.000mm
von Ø5,97 bis Ø12,03 : +0.005/-0.000mm
- ▶ Schaft-Durchmesser Toleranzen : h6
- ▶ linksspiralig/ rechtsscheidend
- ▶ Anschnittwinkel - bis Ø3,75 : 15°
- über Ø3,75 : 45°

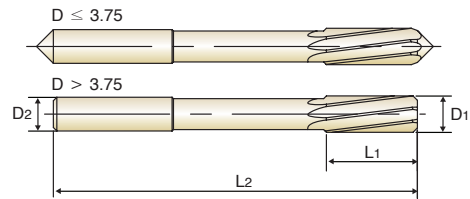

up to Ø3.75 over Ø3.75

1327

Hole type



Unit : mm


EDP No.	Nominal SIZE	Shank Diameter	Flute Length	Overall Length
	D1	D2	L1	L2
K21B100610	6.1	6	28	101
K21B100620	6.2	6	28	101
K21B100630	6.3	6	28	101
K21B100640	6.4	6	28	101
K21B100650	6.5	6	28	101
K21B100660	6.6	6	28	101
K21B100670	6.7	6	28	101
K21B100680	6.8	8	31	109
K21B100690	6.9	8	31	109
K21B100700	7.0	8	31	109
K21B100710	7.1	8	31	109
K21B100720	7.2	8	31	109
K21B100730	7.3	8	31	109
K21B100740	7.4	8	31	109
K21B100750	7.5	8	31	109
K21B100760	7.6	8	33	117
K21B100770	7.7	8	33	117
K21B100780	7.8	8	33	117
K21B100790	7.9	8	33	117
K21B100797	7.97	8	33	117
K21B100798	7.98	8	33	117
K21B100799	7.99	8	33	117
K21B100800	8.0	8	33	117
K21B100801	8.01	8	33	117
K21B100802	8.02	8	33	117
K21B100803	8.03	8	33	117
K21B100810	8.1	8	33	117
K21B100820	8.2	8	33	117
K21B100830	8.3	8	33	117
K21B100840	8.4	8	33	117
K21B100850	8.5	8	33	117
K21B100860	8.6	10	36	125
K21B100870	8.7	10	36	125
K21B100880	8.8	10	36	125
K21B100890	8.9	10	36	125
K21B100900	9.0	10	36	125

HSS-E, NC MACHINE REAMERS WITH WHOLE-NUMBER SHANK Ø

HSS-E, NC-MASCHINENREIBAHLEN mit GERADZÄHLIGEN SCHAFT Ø

- ▶ O.D. Tolerances
Whole-number Ø and 1/10 size : DIN 1420 for H7
1/100 size : from Ø2.01 to Ø5.03 : +0.004/-0.000mm
from Ø5.97 to Ø12.03 : +0.005/-0.000mm
- ▶ Shank Diameter Tolerances : h6
- ▶ LH Spiral Flutes / Right Hand Cut
- ▶ Chamfer Angle - Up to Ø3.75 : 15°
- Over Ø3.75 : 45°

- ▶ Ø Toleranzen:
ganzahlige Ø und 1/10 Größen : DIN 1420 für H7
1/100 Größen : ab Ø2,01 bis Ø5,03 : +0.004/-0.000mm
von Ø5,97 bis Ø12,03 : +0.005/-0.000mm
- ▶ Schaft-Durchmesser Toleranzen : h6
- ▶ linksspiralig/ rechtsscheidend
- ▶ Anschnittwinkel - bis Ø3,75 : 15°
- über Ø3,75 : 45°

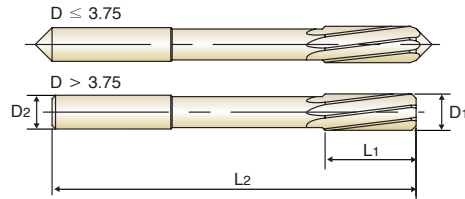

Hole type

HSS-E H7 LH7° 15° 45° 1327
 up to Ø3.75 over Ø3.75

Unit : mm

EDP No.	Nominal SIZE	Shank Diameter	Flute Length	Overall Length
	D1	D2	L1	L2
K21B100901	9.01	10	36	125
K21B100902	9.02	10	36	125
K21B100903	9.03	10	36	125
K21B100910	9.1	10	36	125
K21B100920	9.2	10	36	125
K21B100930	9.3	10	36	125
K21B100940	9.4	10	36	125
K21B100950	9.5	10	36	125
K21B100960	9.6	10	38	133
K21B100970	9.7	10	38	133
K21B100980	9.8	10	38	133
K21B100990	9.9	10	38	133
K21B100997	9.97	10	38	133
K21B100998	9.98	10	38	133
K21B100999	9.99	10	38	133
K21B101000	10.0	10	38	133
K21B101001	10.01	10	38	133
K21B101002	10.02	10	38	133
K21B101003	10.03	10	38	133
K21B101100	11.0	10	41	142
K21B101197	11.97	10	41	151
K21B101198	11.98	10	41	151
K21B101199	11.99	10	41	151
K21B101200	12.0	10	44	151
K21B101201	12.01	10	44	151
K21B101202	12.02	10	44	151
K21B101203	12.03	10	44	151
K21B101300	13.0	10	44	151
K21B101400	14.0	14	47	160
K21B101500	15.0	14	50	162
K21B101600	16.0	14	52	170
K21B101700	17.0	14	54	175
K21B101800	18.0	14	56	182
K21B101900	19.0	16	58	189
K21B102000	20.0	16	60	195

HSS-E, STRAIGHT & LH SPIRAL FLUTE CHUCKING REAMER, NC MACHINE REAMER
HSS-E, GERADEGENUTETE MASCHINENREIBAHLEN, SPIRALGENUTETE MASCHINENREIBAHLEN

Material	Cutting Speed (m/min.)	Feed(mm/rev.)					
		Ø2 ~ Ø4	Ø4 ~ Ø8	Ø8 ~ Ø13	Ø13 ~ Ø20	Ø20 ~ Ø30	> Ø30
Steels < 500N/mm ²	12 ~ 16	0.05~0.15	0.10~0.20	0.15~0.25	0.20~0.30	0.25~0.40	0.35~0.50
Steels 500-700N/mm ²	10 ~ 12	0.05~0.15	0.10~0.20	0.15~0.25	0.20~0.30	0.25~0.40	0.35~0.50
Steels 700-800N/mm ²	6 ~ 8	0.05~0.10	0.08~0.16	0.10~0.20	0.15~0.25	0.20~0.30	0.30~0.40
Alloy Steel or Carbon Steel castings < 500N/mm ²	6 ~ 10	0.05~0.10	0.08~0.16	0.10~0.20	0.15~0.25	0.20~0.30	0.30~0.40
Alloy Steel or Carbon Steel castings > 500N/mm ²	4 ~ 6	0.05~0.10	0.08~0.16	0.10~0.20	0.15~0.25	0.20~0.30	0.30~0.40
Alloy Steel or Carbon Steel forgings	4 ~ 6	0.03~0.08	0.06~0.10	0.08~0.15	0.10~0.20	0.15~0.25	0.20~0.30
Cast Iron < 200HB	12 ~ 14	0.05~0.15	0.10~0.20	0.15~0.25	0.20~0.30	0.25~0.40	0.35~0.50
Cast Iron > 200HB	10 ~ 12	0.05~0.10	0.08~0.16	0.10~0.20	0.15~0.25	0.20~0.30	0.30~0.40
Aluminum or Aluminum Alloy	16 ~ 20	0.10~0.20	0.15~0.25	0.20~0.30	0.25~0.40	0.35~0.50	0.40~0.60
Magnesium or Magnesium Alloy	10 ~ 16	0.10~0.20	0.15~0.25	0.20~0.30	0.25~0.40	0.35~0.50	0.40~0.60
Copper, Brass	16 ~ 18	0.10~0.20	0.15~0.25	0.20~0.30	0.25~0.40	0.35~0.50	0.40~0.60
Stainless Steels	4 ~ 6	0.03~0.08	0.06~0.10	0.08~0.15	0.10~0.20	0.15~0.25	0.20~0.30
Plastics	8 ~ 12	0.10~0.20	0.20~0.30	0.30~0.40	0.40~0.50	0.50~0.60	0.60~0.80

HSS-E, CHUCKING REAMER-QUICK SPIRAL
HSS-E, MASCHINEN - SCHÄLREIBAHLEN

Material	Cutting Speed (m/min.)	Feed(mm/rev.)			
		Ø2 ~ Ø4	Ø4 ~ Ø8	Ø8 ~ Ø13	Ø13 ~ Ø20
Steels < 500N/mm ²	16 ~ 18	0.08~0.16	0.16~0.25	0.20~0.30	0.30~0.40
Steels 500-700N/mm ²	14 ~ 16	0.08~0.16	0.16~0.25	0.20~0.30	0.30~0.40
Aluminum or Aluminum Alloy	18 ~ 22	0.10~0.20	0.20~0.30	0.30~0.40	0.40~0.60
Magnesium or Magnesium Alloy	10 ~ 16	0.08~0.16	0.16~0.25	0.20~0.30	0.30~0.40
Copper, Brass	16 ~ 20	0.08~0.16	0.16~0.25	0.20~0.30	0.30~0.40
Plastics	12 ~ 14	0.10~0.20	0.20~0.30	0.30~0.40	0.40~0.60