


HSSCo8, NC-SPOTTING DRILLS 120°
HSSCo8, NC-ANBOHRER 120°

► **Application** : For more precise centering work on NC/CNC Machines.
The large diameter of the tool permits chamfering work after centering continuously.

► **Verwendung** : Für positionsgenaueres und schnelles Anbohren mit NC/CNC-Maschinen und Bearbeitungszentren, die Ausführung mit Spitzenwinkel 90° ermöglicht sowohl ein Zentrieren, als auch das Vorbohren für einen nächstgrößeren Durchmesser.

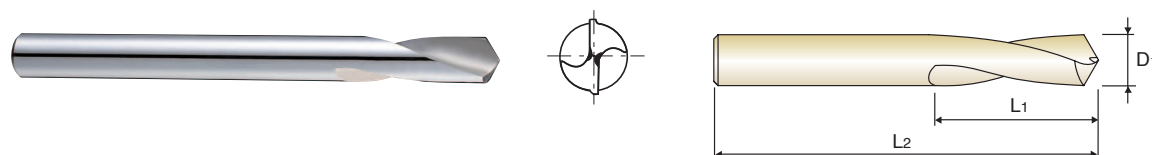

NC
HSS Co8
h6
h6
120°
P.237

LONG LENGTH

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D2307030	3.0	12	46
D2307040	4.0	12	55
D2307050	5.0	15	60
D2307060	6.0	20	66
D2307080	8.0	25	79
D2307100	10.0	25	89
D2307120	12.0	30	102
D2307160	16.0	35	115
D2307200	20.0	40	131

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D2322060	6.0	20	140
D2322080	8.0	25	140
D2322100	10.0	25	170
D2322120	12.0	30	170

► TiN, TiCN and TiAlN are available on your request.

◎ : Excellent ○ : Good

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		Cast Iron	Aluminum	Stainless Steels	Titanium	Mild Steels	Copper	Bronze	CFRP
~HB225	HB225~325	HRc30~45	HRc45~55	HRc55~								
◎	◎					○	○		○		○	

- I-DREAM DRILLS
- DREAM DRILLS -GENERAL
- DREAM DRILLS -INOX
- DREAM DRILLS -ALU
- DREAM DRILLS -CFRP
- DREAM DRILLS -MQL TYPE
- DREAM DRILLS for HARDENED STEELS
- GENERAL CARBIDE DRILLS
- NC-SPOTTING DRILLS
- CENTER DRILLS
- MULTI-1 DRILLS
- HPD DRILLS
- GOLD-P DRILLS
- STRAIGHT SHANK DRILLS
- TAPER SHANK DRILLS
- NC-SPOTTING DRILLS
- CENTER DRILLS
- SPADE DRILLS
- TECHNICAL DATA

HSSCo8, NC-SPOTTING DRILLS 90°, 120°, 142°
HSSCo8, NC-ANBOHRER 90°, 120°, 142°
D2306, D2321, D2307, D2322, D2320, D2323 SERIES

WORK MATERIAL	CARBON STEELS		ALLOY STEELS		ALLOY STEELS, TOOL STEELS, HARDENED STEELS		STAINLESS STEELS		ALUMINUM, ALUMINUM ALLOYS	
	18 ~ 23 m/min		15 ~ 20 m/min		8 ~ 12 m/min		8 ~ 12 m/min		55 ~ 65 m/min	
DRILLING SPEED										
DIAMETER	N	S	N	S	N	S	N	S	N	S
3.0	2460	0.06	2110	0.06	1080	0.06	940	0.06	7040	0.14
4.0	1850	0.07	1580	0.07	800	0.07	700	0.07	5280	0.15
5.0	1510	0.08	1300	0.08	670	0.08	580	0.08	4400	0.17
6.0	1170	0.09	1030	0.09	540	0.09	460	0.09	3520	0.19
8.0	880	0.11	790	0.11	400	0.11	350	0.11	2640	0.22
10.0	700	0.12	630	0.12	320	0.12	290	0.12	2110	0.25
12.0	590	0.14	530	0.14	260	0.14	240	0.14	1760	0.28
16.0	460	0.20	400	0.20	200	0.20	180	0.20	1320	0.33
20.0	350	0.24	320	0.24	150	0.24	140	0.24	1060	0.45

N = R.P.M

S = Feed per Revolution (mm/rev.)