


BSP(G) Solid Carbide Thread Mill with Coolant Hole for BSP(G) Internal/External Thread

VOLLHARTMETALL GEWINDEFÄSER mit KÜHLKANAL für BSP (G) INNEN- / AUßENGEWINDE


► Easy to cut threads even if exotic materials like Nickel, Titanium or their alloys.

► Problemloses Gewindeschneiden sogar in exotischen Werkstoffen, wie Nickel, Titan und ihre Legierungen.

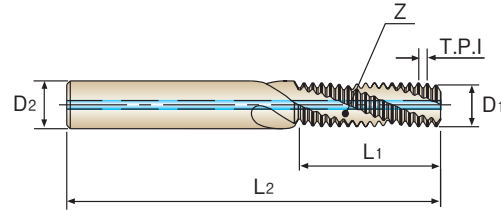

- Material : Solid Carbide
- Shank : DIN6535 HA
- Spiral Angle : 15°
- Internal Coolant Hole

- Material : Vollhartmetall
- Schaft : DIN 6535 HA
- Drallwinkel : 15°
- Innere Kühlmittelzufuhr (IKZ)



Unit : mm

EDP No.	Nominal Diameter [D]	T.P.I	Cutter Diameter	Shank Diameter	Thread Length	Over All Length	No. of Flute
TiAlN			D1	D2	L1	L2	Z
L6215020	1/16"	28	5.9	6	16.3	65	3
L6215200	1/8"	28	7.9	8	20.0	70	4
L6215400	1/4"	19	9.9	10	26.7	80	4
L6215480	3/8"	19	13.9	14	33.4	92	4
L6215560	1/2"	14	15.9	16	43.5	104	5
L6215700	3/4"	14	17.9	18	34.5	100	5
L6215780	1"	11	19.9	20	34.6	100	5

* Other coatings are available on your request

◎ : Excellent ○ : Good

Carbon Steels	Alloy Steels	Heat Treated Steels	High Hardened Steel	Cast Iron	Stainless Steels	Titanium Alloy	Chrome-Nickel Alloy	Non Ferrous Materials
◎	◎	◎		◎	○	○	○	◎

RECOMMENDED CUTTING SPEED
EMPFOHLENE SCHNEIDKONDITIONEN
RECOMMENDED CUTTING CONDITION for Thread Mills

unit : mm

Materials	Cutting Speed (m/min)	Feed per Tooth (fz)	
		Cutter Diameter ≤ Ø8.0	Cutter Diameter > Ø8.0
Low Carbon Steels Medium Carbon Steels	80 - 120	0.02 - 0.04	0.04 - 0.10
High Carbon Steels	80 - 120	0.02 - 0.04	0.04 - 0.10
Alloy Steels	80 - 120	0.02 - 0.04	0.04 - 0.10
Heat Treated Steels	60 - 100	0.02 - 0.04	0.04 - 0.10
Stainless Steels	40 - 80	0.01 - 0.02	0.02 - 0.06
Cast Iron	50 - 100	0.02 - 0.04	0.04 - 0.10
Chrome-Nickel Alloys Titanium Alloys	20 - 60	0.01 - 0.02	0.02 - 0.06
Non Ferrous Materials	100 - 300	0.03 - 0.07	0.05 - 0.10

RECOMMENDED CUTTING CONDITION for Drill and Thread Mills

unit : mm

Material	Cutting Speed (m/min)	Fz(Thread Milling) - Feed per tooth		Fdr(Drilling) - Feed per revolution	
		Cutter Diameter ≤ Ø8.0	Cutter Diameter > Ø8.0	Cutter Diameter ≤ Ø8.0	Cutter Diameter > Ø8.0
Cast Iron	80-150	0.03-0.08	0.08-0.12	0.10-0.20	0.20-0.25
Aluminium Aluminium-alloy Magnesium	100-300	0.05-0.10	0.10-0.15	0.10-0.20	0.20-0.30
Plastics	80-150	0.05-0.10	0.10-0.15	0.10-0.20	0.20-0.30

**RECOMMENDED CUTTING CONDITION
for Hard Material Miniature Thread Mills**

unit : mm

Materials	Cutting Speed (m/min)	Feed(mm/tooth)	
		Cutter Diameter ≤ Ø6.0	Cutter Diameter > Ø6.0
Alloy Steel ≥ HB325	80-120	0.02-0.04	0.04-0.06
Stainless Steel ≥ HB330	40-80	0.02-0.04	0.04-0.06
Cast Iron	50-100	0.03-0.05	0.05-0.07
Chrome-Nickel Alloys Titanium Alloys	20-60	0.02-0.03	0.03-0.05
Hardened Material	45~50HRc	25-70	0.03-0.05
	51~55HRc	25-60	0.02-0.04
	56~62HRc	25-50	0.01-0.03