


## COMBI-SHELL MILL ARBOR KOMBI-AUFNAHMEDORN FÜR FRÄSER MIT BOHRUNG

MAS403-BT

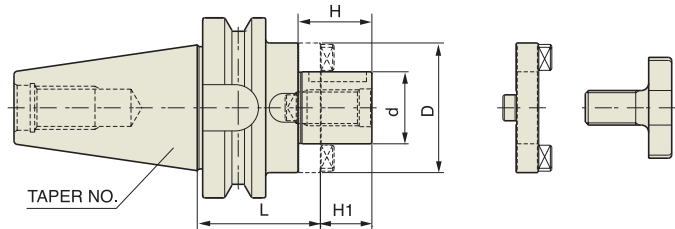

MAS403 -BT	Taper Accuracy AT3	G Value 6.3	RPM 12,000	Coolant System
---------------	--------------------------	----------------	---------------	-------------------

### ■ STANDARD

TAPER No.	CODE No.	d	L	D	H1	H	PART No.	Weight (kg)
30	BT30 - CMA16 - 50	16	50	32	17	27	27,33,39	
	BT30 - CMA22 - 50	22	50	40	19	31	28,34,40	
	BT30 - CMA27 - 55	27	55	48	21	33	29,35,41	
40	BT40 - CMA16 - 55	16	55	32	17	27	27,33,39	
	BT40 - CMA22 - 55	22	55	40	19	31	28,34,40	
	BT40 - CMA27 - 55	27	55	48	21	33	29,35,41	
	BT40 - CMA32 - 60	32	60	58	24	38	30,36,42	
50	BT40 - CMA40 - 60	40	60	70	27	41	31,37,43	
	BT50 - CMA16 - 70	16	70	32	17	27	27,33,39	
	BT50 - CMA22 - 70	22	70	40	19	31	28,34,40	
	BT50 - CMA27 - 70	27	70	48	21	33	29,35,41	
	BT50 - CMA32 - 70	32	70	58	24	38	30,36,42	
	BT50 - CMA40 - 70	40	70	70	27	41	31,37,43	
	BT50 - CMA50 - 70	50	70	90	30	46	32,38,44	

### ■ EXTENDED

TAPER No.	CODE No.	d	L	D	H1	H	PART No.	Weight (kg)
40	BT40 - CMA16 - 100	16	100	32	17	27	27,33,39	
	BT40 - CMA22 - 100	22	100	40	19	31	28,34,40	
	BT40 - CMA27 - 100	27	100	48	21	33	29,35,41	
	BT40 - CMA32 - 100	32	100	58	24	38	30,36,42	
50	BT50 - CMA16 - 100	16	100	32	17	27	27,33,39	
	BT50 - CMA22 - 100	22	100	40	19	31	28,34,40	
	BT50 - CMA27 - 100	27	100	48	21	33	29,35,41	
	BT50 - CMA32 - 100	32	100	58	24	38	30,36,42	
	BT50 - CMA40 - 100	40	100	70	27	41	31,37,43	

- ▶ High Balanced combi-shell mill arbor are available on request
- ▶ Clutch drive ring, Collar bolt & key for CMA – part on page 1464