


CARBIDE, 6&8 FLUTE 45° HELIX LONG LENGTH

- VOLLHARTMETALL, 6&8 SCHNEIDEN 45° RECHTSSPIRALE LANG
- Fraise carbure, 6&8 dents, hélice 45°, longue
- 6&8 TAGLIANTI, ELICA 45°, SERIE

- ▶ Designed to machine hardened materials.
- ▶ High speed cutting and finish milling with high feed rates.
- ▶ Superior workpiece finishes.
- ▶ Superior wear resistance.
- ▶ Suitable for dry milling.


- ▶ Geeignet zum Fräsen von gehärteten Stählen.
- ▶ Hochgeschwindigkeitsfräsen und Finishing mit erhöhtem Vorschub.
- ▶ Bessere Werkstückoberflächen
- ▶ Höhere Verschleißfestigkeit.
- ▶ Geeignet zum Trocken-Fräsen.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	No. of Flute
	D1	D2	L1	L2	
GM812060	6.0	6	13	57	6
GM812080	8.0	8	19	63	6
GM812100	10.0	10	22	72	6
GM812120	12.0	12	26	83	6
GM812160	16.0	16	32	92	6
GM812200	20.0	20	38	104	8

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

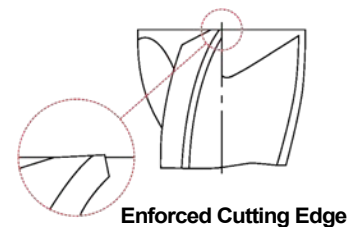


◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	42	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	○	◎	◎	○	◎	◎	◎	○	◎				○	○	○	○	○	○

ISO	N					S										H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials	Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	550	630	400	550
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		○	◎	○	○

YG X-POWER PRO END MILLS

**RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER**



Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

GM812 SERIES

6&8 FLUTE - SIDE CUTTING

NORMAL SPEED

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)						
						6.0	8.0	10.0	12.0	16.0	20.0	
P	1-4	Non-alloy steel	0.1D	1.5D	Vc	105	110	110	110	110	105	
					fz	0.06	0.079	0.099	0.099	0.1	0.075	
						RPM	5570	4377	3501	2918	2188	1671
						FEED	2005	2075	2080	1733	1313	1003
		5	Non-alloy steel	0.05D	1.5D	Vc	75	75	75	75	75	75
	fz					0.059	0.078	0.098	0.097	0.099	0.075	
	RPM					3979	2984	2387	1989	1492	1194	
						FEED	1409	1397	1404	1158	886	716
		6-7	Low alloy steel	0.1D	1.5D	Vc	105	110	110	110	110	105
	fz					0.06	0.079	0.099	0.099	0.1	0.075	
RPM	5570					4377	3501	2918	2188	1671		
					FEED	2005	2075	2080	1733	1313	1003	
	8-9	Low alloy steel	0.05D	1.5D	Vc	75	75	75	75	75	75	
fz					0.059	0.078	0.098	0.097	0.099	0.075		
RPM					3979	2984	2387	1989	1492	1194		
					FEED	1409	1397	1404	1158	886	716	
	10	High alloyed steel, and tool steel	0.1D	1.5D	Vc	105	110	110	110	110	105	
fz					0.06	0.079	0.099	0.099	0.1	0.075		
RPM					5570	4377	3501	2918	2188	1671		
					FEED	2005	2075	2080	1733	1313	1003	
	11.1 - 11.2	High alloyed steel, and tool steel	0.05D	1.5D	Vc	75	75	75	75	75	75	
fz					0.059	0.078	0.098	0.097	0.099	0.075		
RPM					3979	2984	2387	1989	1492	1194		
					FEED	1409	1397	1404	1158	886	716	
H	38.1	Hardened steel	0.05D	1.5D	Vc	75	75	75	75	75	75	
					fz	0.059	0.078	0.098	0.097	0.099	0.075	
						RPM	3979	2984	2387	1989	1492	1194
						FEED	1409	1397	1404	1158	886	716
		38.2	Hardened steel	0.05D	1.0D	Vc	30	30	30	30	35	30
	fz					0.022	0.030	0.035	0.036	0.035	0.027	
	RPM					1592	1194	955	796	696	477	
						FEED	210	215	201	172	146	103
		40	Chilled Cast Iron	0.05D	1.5D	Vc	75	75	75	75	75	75
	fz					0.059	0.078	0.098	0.097	0.099	0.075	
RPM	3979					2984	2387	1989	1492	1194		
					FEED	1409	1397	1404	1158	886	716	
	41	Hardened Cast Iron	0.05D	1.0D	Vc	30	30	30	30	35	30	
fz					0.022	0.030	0.035	0.036	0.035	0.027		
RPM					1592	1194	955	796	696	477		
					FEED	210	215	201	172	146	103	

HIGH SPEED

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)						
						6.0	8.0	10.0	12.0	16.0	20.0	
P	1-5	Non-alloy steel	0.05D	1.5D	Vc	325	325	320	325	325	325	
					fz	0.06	0.081	0.1	0.1	0.1	0.076	
						RPM	17242	12931	10186	8621	6466	5173
						FEED	6207	6285	6112	5173	3879	3145
		6-9	Low alloy steel	0.05D	1.5D	Vc	325	325	320	325	325	325
	fz					0.06	0.081	0.1	0.1	0.1	0.076	
	RPM					17242	12931	10186	8621	6466	5173	
						FEED	6207	6285	6112	5173	3879	3145
		10 - 11.2	High alloyed steel, and tool steel	0.05D	1.5D	Vc	325	325	320	325	325	325
	fz					0.06	0.081	0.1	0.1	0.1	0.076	
RPM	17242					12931	10186	8621	6466	5173		
					FEED	6207	6285	6112	5173	3879	3145	
H	38.1	Hardened steel	0.05D	1.5D	Vc	325	325	320	325	325	325	
					fz	0.060	0.081	0.100	0.100	0.100	0.076	
						RPM	17242	12931	10186	8621	6466	5173
						FEED	6207	6285	6112	5173	3879	3145
		38.2	Hardened steel	0.05D	1.0D	Vc	160	160	160	160	160	160
	fz					0.060	0.081	0.101	0.100	0.100	0.073	
	RPM					8488	6366	5093	4244	3183	2546	
						FEED	3056	3094	3086	2546	1910	1487
		40	Chilled Cast Iron	0.05D	1.5D	Vc	325	325	320	325	325	325
	fz					0.060	0.081	0.100	0.100	0.100	0.076	
RPM	17242					12931	10186	8621	6466	5173		
					FEED	6207	6285	6112	5173	3879	3145	
	41	Hardened Cast Iron	0.05D	1.0D	Vc	160	160	160	160	160	160	
fz					0.060	0.081	0.101	0.100	0.100	0.073		
RPM					8488	6366	5093	4244	3183	2546		
					FEED	3056	3094	3086	2546	1910	1487	

SELECTION GUIDE



SERIES	GM876	GM813	GM886	GM902
FLUTE	2	2	2	2
HELIX ANGLE	30°	30°	30°	30°
CUTTING EDGE SHAPE	BALL NOSE	BALL NOSE	BALL NOSE	BALL NOSE
SIZE MIN	R0.5	R0.5	R0.25	R0.5
SIZE MAX	R8.0	R10.0	R3.0	R4.0
PAGE	350	351	352	354

SOLID CARBIDE
X-POWER PRO
END MILLS

for Pre-Hardened Steels up to HRC55,
 Mold & Die, Dry & Wet Cutting

SHORT LENGTH	LONG LENGTH	RIB PROCESSING	TAPER NECK
Y-Coating	Y-Coating	Y-Coating	Y-Coating




Please visit
globalyg1.com/mat
 for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P 372

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRC	GM876	GM813	GM886	GM902	
P	1	Non-alloy steel	About 0.15% C Annealed	125		○	○	○	○	
	2		About 0.45% C Annealed	190	13	○	○	○	○	
	3		About 0.45% C Quenched & Tempered	250	25	○	○	○	○	
	4		About 0.75% C Annealed	270	28	◎	◎	◎	○	
	5		About 0.75% C Quenched & Tempered	300	32	◎	◎	◎	○	
	6	Low alloy steel	Annealed	180	10	○	○	○	○	
	7		Quenched & Tempered	275	29	◎	◎	◎	○	
	8		Quenched & Tempered	300	32	◎	◎	◎	◎	
	9		Quenched & Tempered	350	38	◎	◎	◎	◎	
	10		High alloyed steel, and tool steel	Annealed	200	15	○	○	○	○
	11			Quenched & Tempered	325	35	◎	◎	◎	◎
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15					
	13		Martensitic Quenched & Tempered	240	23					
	14		Austenitic	180	10					
K	15	Grey cast iron	Pearlitic / ferritic	180	10	○	○	○		
	16		Pearlitic (Martensitic)	260	26	○	○	○		
	17	Nodular cast iron	Ferritic	160	3	○	○	○		
	18		Pearlitic	250	25	○	○	○		
	19		Ferritic	130		○	○	○		
20	Malleable cast iron	Pearlitic	230	21	○	○	○			
N	21	Aluminum-wrought alloy	Not Curable	60						
	22		Curable Hardened	100						
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75						
	24		≤ 12% Si, Curable Hardened	90						
	25		> 12% Si, Not Curable	130						
	26		Cutting Alloys, PB>1%	110						
	27	Copper and Copper Alloys	CuZn, CuSnZn (Brass)	90						
	28		CuSn, lead-free copper and electrolytic copper	100						
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic							
	30		Rubber, Wood, etc.							
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15					
	32		Cured	280	30					
	33		Annealed	250	25					
	34		Ni or Co Based Cured	350	38					
	35		Cast	320	34					
	36	Titanium Alloys	Pure Titanium	400 Rm						
	37		Alpha + Beta Alloys Hardened	1050 Rm						
H	38	Hardened steel	Hardened	550	55	○	○	○	○	
	39		Hardened	630	60	○	○	○	○	
	40	Chilled Cast Iron	Cast	400	42	◎	◎	◎	◎	
	41	Hardened Cast Iron	Hardened	550	55	○	○	○	○	

GM815	GM818	GM8A1	GM839	GM819	GM810	GM883	GM895	GM811	GM817	GM812	GM834	GM814
4	2	2	4	4	2	2	3	4	4	6&8	6	3&4
30°	30°	30°	30°	30°	30°	30°	38°	30°	30°	45°	45°	20°
BALL NOSE	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	ROUGHING
R1.0	D4.0	D1.0	D2.0	D3.0	D0.4	D0.4	D1.0	D2.0	D2.0	D6.0	D6.0	D6.0
R8.0	D12.0	D6.0	D12.0	D20.0	D20.0	D6.0	D16.0	D25.0	D20.0	D20.0	D25.0	D20.0
355	356	357	359	360	361	363	366	367	368	369	370	371
LONG LENGTH	LONG LENGTH	RIB PROCESSING	STUB LENGTH	LONG LENGTH	SHORT LENGTH	RIB PROCESSING	SHORT LENGTH	SHORT LENGTH	LONG LENGTH	LONG LENGTH	EXTRA LONG LENGTH	LONG LENGTH
Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating



○	○	○	○	○	○	○	○	○	○	○	○	○	1
○	○	○	○	○	○	○	○	○	○	○	○	○	2
○	○	○	○	○	○	○	○	○	○	○	○	○	3
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	4
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	5
○	○	○	○	○	○	○	○	○	○	○	○	○	6 P
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	7
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	8
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	9
○	○	○	○	○	○	○	○	○	○	○	○	○	10
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	11
				○	○		○	○				○	12
				○	○		○	○				○	13 M
				○	○		○	○				○	14
○	○	○	○	○	○	○	○	○	○	○	○	○	15
○	○	○	○	○	○	○	○	○	○	○	○	○	16
○	○	○	○	○	○	○	○	○	○	○	○	○	17 K
○	○	○	○	○	○	○	○	○	○	○	○	○	18
○	○	○	○	○	○	○	○	○	○	○	○	○	19
○	○	○	○	○	○	○	○	○	○	○	○	○	20
													21
													22
													23
													24
													25 N
													26
													27
													28
													29
													30
													31
													32
													33
													34 S
													35
													36
													37
○	○	○	○	○	○	○	○	○	○	○	○	○	38
○	○	○	○	○	○	○	○	○	○	○	○	○	39
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	40 H
○	○	○	○	○	○	○	○	○	○	○	○	○	41

HSS

CBN END MILLS

i-Xmill END MILLS

i-SMART MODULAR END MILLS

X5070 END MILLS

4G MILL END MILLS

X-POWER PRO END MILLS

TitaNox-POWER END MILLS

JET-POWER END MILLS

V7 PLUS END MILLS

ALU-POWER HPC END MILLS

ALU-POWER END MILLS

D-POWER GRAPHITE END MILLS

D-POWER CFRP END MILLS

ROUTERS

CRX S END MILLS

K-2 END MILLS

ONLY ONE COATED PM60 END MILLS

TANK-POWER END MILLS

GENERAL HSS END MILLS

MILLING CUTTERS

TECHNICAL DATA