CARBIDE, 4 FLUTE LONG LENGTH BALL NOSE

VOLLHARTMETALL, 4 SCHNEIDEN LANG KUGELSTIRN

Fraise carbure, 4 dents, hémisphérique, longue

4 TAGLIENTI, SEMISFERICA, SERIE LUNGA

- Designed to machine tool steels, alloy steels, mold steels and other high hardened materials.
- For copy - milling machines.
- 4 Flute design - higher feed than GM813 series

- Zur Bearbeitung von Werkzeugstählen, Legierten Stählen, Stahlguß und gehärteten Stählen.
- Für Kopierfräsmaschinen.
- 4 Schneiden - Höherer Vorschub als bei GM813 serien.



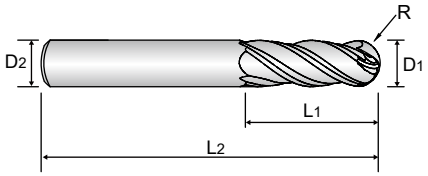

CARBIDE | 4 | 30° | R ±0.02 | PLAIN

P.378-379

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R(±0.02)	D1	D2	L1	L2
GM815020	R1.0	2.0	6	5	50
GM815030	R1.5	3.0	6	8	60
GM815040	R2.0	4.0	6	8	70
GM815050	R2.5	5.0	6	10	80
GM815060	R3.0	6.0	6	12	90
GM815080	R4.0	8.0	8	14	100
GM815100	R5.0	10.0	10	18	100
GM815120	R6.0	12.0	12	22	110
GM815160	R8.0	16.0	16	30	140

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO	P											M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	○	◎	◎	○	◎	◎	◎	○	◎				○	○	○	○	○	○

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		○	○	◎	○

X-POWER PRO END MILLS

RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

GM815 SERIES — **4 FLUTE BALL NOSE**

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.
Ap = mm

NORMAL SPEED

ISO	VDI 3323	Material Description	Ae	Parameter	Diameter (Ø) 2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0	16.0
P	1-4	Non-alloy steel	0.2D	Vc	105	130	140	150	170	190	210	230	250
				fz	0.013	0.019	0.026	0.034	0.045	0.068	0.09	0.111	0.136
				RPM	16711	13793	11141	9549	9019	7560	6685	6101	4974
				FEED	869	1048	1159	1299	1623	2056	2406	2709	2706
				Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3
	5		0.2D	Vc	75	100	110	120	135	150	170	185	200
				fz	0.010	0.017	0.024	0.030	0.045	0.060	0.075	0.089	0.106
				RPM	11937	10610	8754	7639	7162	5968	5411	4907	3979
				FEED	477	722	840	917	1289	1432	1623	1747	1687
				Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3
	6-7	Low alloy steel	0.2D	Vc	105	130	140	150	170	190	210	230	250
				fz	0.013	0.019	0.026	0.034	0.045	0.068	0.09	0.111	0.136
				RPM	16711	13793	11141	9549	9019	7560	6685	6101	4974
				FEED	869	1048	1159	1299	1623	2056	2406	2709	2706
				Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3
	8-9		0.2D	Vc	75	100	110	120	135	150	170	185	200
				fz	0.010	0.017	0.024	0.030	0.045	0.060	0.075	0.089	0.106
				RPM	11937	10610	8754	7639	7162	5968	5411	4907	3979
				FEED	477	722	840	917	1289	1432	1623	1747	1687
				Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3
	10	High alloyed steel, and tool steel	0.2D	Vc	105	130	140	150	170	190	210	230	250
				fz	0.013	0.019	0.026	0.034	0.045	0.068	0.09	0.111	0.136
				RPM	16711	13793	11141	9549	9019	7560	6685	6101	4974
				FEED	869	1048	1159	1299	1623	2056	2406	2709	2706
				Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3
	11.1 - 11.2		0.2D	Vc	75	100	110	120	135	150	170	185	200
				fz	0.010	0.017	0.024	0.030	0.045	0.060	0.075	0.089	0.106
				RPM	11937	10610	8754	7639	7162	5968	5411	4907	3979
				FEED	477	722	840	917	1289	1432	1623	1747	1687
				Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3
K	15-20	Grey cast iron Nodular cast iron Malleable cast iron	0.2D	Vc	105	130	140	150	170	190	210	230	250
				fz	0.013	0.019	0.026	0.034	0.045	0.068	0.09	0.111	0.136
				RPM	16711	13793	11141	9549	9019	7560	6685	6101	4974
				FEED	869	1048	1159	1299	1623	2056	2406	2709	2706
				Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3
H	38.1 - 39.2	Hardened steel	0.1D	Vc	30	45	55	60	65	65	65	70	70
				fz	0.008	0.012	0.016	0.018	0.022	0.033	0.041	0.053	0.069
				RPM	4775	4775	4377	3820	3448	2586	2069	1857	1393
				FEED	153	229	280	275	303	341	339	394	384
				Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3
	40	Chilled Cast Iron	0.2D	Vc	75	100	110	120	135	150	170	185	200
				fz	0.01	0.017	0.024	0.03	0.045	0.06	0.075	0.089	0.106
				RPM	11937	10610	8754	7639	7162	5968	5411	4907	3979
				FEED	477	722	840	917	1289	1432	1623	1747	1687
				Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3
	41	Hardened Cast Iron	0.1D	Vc	30	45	55	60	65	65	65	70	70
				fz	0.008	0.012	0.016	0.018	0.022	0.033	0.041	0.053	0.069
				RPM	4775	4775	4377	3820	3448	2586	2069	1857	1393
				FEED	153	229	280	275	303	341	339	394	384
				Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3

▶ NEXT PAGE



GM815 SERIES — 4 FLUTE BALL NOSE

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.
Ap = mm

HIGH SPEED

ISO	VDI 3323	Material Description	Ae	Parameter	Diameter (Ø) 2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0	16.0
P	1-5	Non-alloy steel	0.05D	Vc	140	210	275	345	415	440	460	485	505
				fz	0.026	0.036	0.052	0.064	0.071	0.09	0.105	0.12	0.136
				RPM	22282	22282	21884	21963	22016	17507	14642	12865	10047
				FEED	2317	3209	4552	5623	6253	6303	6150	6175	5465
				Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3
	6-9	Low alloy steel	0.05D	Vc	140	210	275	345	415	440	460	485	505
				fz	0.026	0.036	0.052	0.064	0.071	0.090	0.105	0.120	0.136
				RPM	22282	22282	21884	21963	22016	17507	14642	12865	10047
				FEED	2317	3209	4552	5623	6253	6303	6150	6175	5465
				Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3
	10 - 11.2	High alloyed steel, and tool steel	0.05D	Vc	140	210	275	345	415	440	460	485	505
				fz	0.026	0.036	0.052	0.064	0.071	0.09	0.105	0.12	0.136
				RPM	22282	22282	21884	21963	22016	17507	14642	12865	10047
				FEED	2317	3209	4552	5623	6253	6303	6150	6175	5465
				Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3
K	15-20	Grey cast iron Nodular cast iron Malleable cast iron	0.05D	Vc	140	210	275	345	415	440	460	485	505
				fz	0.026	0.036	0.052	0.064	0.071	0.09	0.105	0.12	0.136
				RPM	22282	22282	21884	21963	22016	17507	14642	12865	10047
				FEED	2317	3209	4552	5623	6253	6303	6150	6175	5465
				Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3
H	38.1 - 39.2	Hardened steel	0.05D	Vc	140	170	180	200	210	220	230	240	250
				fz	0.017	0.023	0.032	0.038	0.045	0.056	0.064	0.071	0.079
				RPM	22282	18038	14324	12732	11141	8754	7321	6366	4974
				FEED	1515	1659	1833	1935	2005	1961	1874	1808	1572
				Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3
	40	Chilled Cast Iron	0.05D	Vc	140	210	275	345	415	440	460	485	505
				fz	0.026	0.036	0.052	0.064	0.071	0.09	0.105	0.12	0.136
				RPM	22282	22282	21884	21963	22016	17507	14642	12865	10047
				FEED	2317	3209	4552	5623	6253	6303	6150	6175	5465
				Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3
	41	Hardened Cast Iron	0.05D	Vc	140	170	180	200	210	220	230	240	250
				fz	0.017	0.023	0.032	0.038	0.045	0.056	0.064	0.071	0.079
				RPM	22282	18038	14324	12732	11141	8754	7321	6366	4974
				FEED	1515	1659	1833	1935	2005	1961	1874	1808	1572
				Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3



SELECTION GUIDE

YG MILLING TOOLS

SOLID CARBIDE
X-POWER PRO
END MILLS

for Pre-Hardened Steels up to HRc55,
Mold & Die, Dry & Wet Cutting

Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P 372

SERIES	GM876	GM813	GM886	GM902
FLUTE	2	2	2	2
HELIX ANGLE	30°	30°	30°	30°
CUTTING EDGE SHAPE	BALL NOSE	BALL NOSE	BALL NOSE	BALL NOSE
SIZE MIN	R0.5	R0.5	R0.25	R0.5
SIZE MAX	R8.0	R10.0	R3.0	R4.0
PAGE	350	351	352	354
	SHORT LENGTH	LONG LENGTH	RIB PROCESSING	TAPER NECK
	Y-Coating	Y-Coating	Y-Coating	Y-Coating

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment		HB	HRc				
P	1	Non-alloy steel	About 0.15% C	Annealed	125		○	○	○	○
	2		About 0.45% C	Annealed	190	13	○	○	○	○
	3		About 0.45% C	Quenched & Tempered	250	25	○	○	○	○
	4		About 0.75% C	Annealed	270	28	◎	◎	◎	○
	5		About 0.75% C	Quenched & Tempered	300	32	◎	◎	◎	○
	6	Low alloy steel		Annealed	180	10	○	○	○	○
	7			Quenched & Tempered	275	29	◎	◎	◎	○
	8			Quenched & Tempered	300	32	◎	◎	◎	◎
	9			Quenched & Tempered	350	38	◎	◎	◎	◎
	10	High alloyed steel, and tool steel		Annealed	200	15	○	○	○	○
	11			Quenched & Tempered	325	35	◎	◎	◎	◎
M	12	Stainless steel	Ferritic / Martensitic	Annealed	200	15				
	13		Martensitic	Quenched & Tempered	240	23				
	14		Austenitic		180	10				
K	15	Grey cast iron	Pearlitic / ferritic		180	10	○	○	○	
	16		Pearlitic (Martensitic)		260	26	○	○	○	
	17	Nodular cast iron	Ferritic		160	3	○	○	○	
	18		Pearlitic		250	25	○	○	○	
	19	Malleable cast iron	Ferritic		130		○	○	○	
	20		Pearlitic		230	21	○	○	○	
N	21	Aluminum-wrought alloy	Not Curable		60					
	22		Curable	Hardened	100					
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable		75					
	24		≤ 12% Si, Curable	Hardened	90					
	25		> 12% Si, Not Curable		130					
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%		110					
	27		CuZn, CuSnZn (Brass)		90					
	28		CuSn, lead-free copper and electrolytic copper		100					
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic							
	30		Rubber, Wood, etc.							
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15				
	32			Cured	280	30				
	33		Ni or Co Based	Annealed	250	25				
	34			Cured	350	38				
	35			Cast	320	34				
	36	Titanium Alloys	Pure Titanium		400 Rm					
	37		Alpha + Beta Alloys	Hardened	1050 Rm					
H	38	Hardened steel		Hardened	550	55	○	○	○	○
	39			Hardened	630	60	○			
	40	Chilled Cast Iron		Cast	400	42	◎	◎	◎	◎
	41	Hardened Cast Iron		Hardened	550	55	○	○	○	○

GM815	GM818	GM8A1	GM839	GM819	GM810	GM883	GM895	GM811	GM817	GM812	GM834	GM814	
4	2	2	4	4	2	2	3	4	4	6&8	6	3&4	
30°	30°	30°	30°	30°	30°	30°	38°	30°	30°	45°	45°	20°	
BALL NOSE	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	ROUGHING	
R1.0	D4.0	D1.0	D2.0	D3.0	D0.4	D0.4	D1.0	D2.0	D2.0	D6.0	D6.0	D6.0	
R8.0	D12.0	D6.0	D12.0	D20.0	D20.0	D6.0	D16.0	D25.0	D20.0	D20.0	D25.0	D20.0	
355	356	357	359	360	361	363	366	367	368	369	370	371	
LONG LENGTH	LONG LENGTH	RIB PROCESSING	STUB LENGTH	LONG LENGTH	SHORT LENGTH	RIB PROCESSING	SHORT LENGTH	SHORT LENGTH	LONG LENGTH	LONG LENGTH	EXTRA LONG LENGTH	LONG LENGTH	
Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	
													
○	○	○	○	○	○	○	○	○	○	○	○	○	1
○	○	○	○	○	○	○	○	○	○	○	○	○	2
○	○	○	○	○	○	○	○	○	○	○	○	○	3
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	4
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	5
○	○	○	○	○	○	○	○	○	○	○	○	○	6 P
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	7
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	8
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	9
○	○	○	○	○	○	○	○	○	○	○	○	○	10
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	11
				○	○		○	○				○	12
				○	○		○	○				○	13 M
				○	○		○	○				○	14
○	○	○	○	○	○	○	○	○	○	○	○	○	15
○	○	○	○	○	○	○	○	○	○	○	○	○	16
○	○	○	○	○	○	○	○	○	○	○	○	○	17
○	○	○	○	○	○	○	○	○	○	○	○	○	18 K
○	○	○	○	○	○	○	○	○	○	○	○	○	19
○	○	○	○	○	○	○	○	○	○	○	○	○	20
													21
													22
													23
													24
													25
													26 N
													27
													28
													29
													30
													31
													32
													33
													34 S
													35
													36
													37
○	○	○	○	○	○	○	○	○	○	○	○	○	38
○													39 H
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	40
○	○	○	○	○	○	○	○	○	○	○	○	○	41