


CARBIDE, 2 FLUTE for RIB PROCESSING

- VOLLHARTMETALL, 2 SCHNEIDEN für SCHMALE RIPPEN
- Fraise carbure, 2 dents pour usinage de rainure
- 2 TAGLIENTI, SCARICATA PER NERVATURE

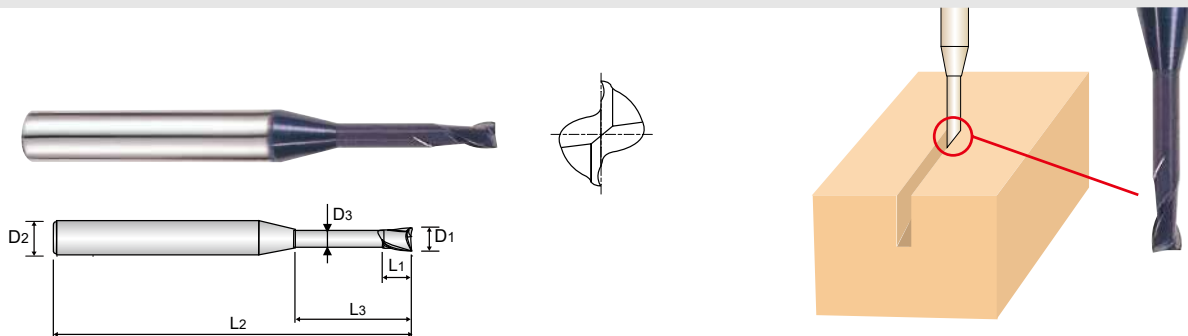

CARBIDE
2
30°
PLAIN

P.386-387

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	D1	D2	L1	L3	L2	D3
GM883004	0.4	4	0.6	2	45	0.37
GM883005	0.5	4	0.7	2	45	0.45
GM883988	0.5	4	0.7	4	45	0.45
GM883820	0.7	4	1	3	45	0.65
GM883008	0.8	4	1.2	4	45	0.75
GM883908	0.8	4	1.2	6	45	0.75
GM883996	1.0	4	1.5	4	45	0.95
GM883010	1.0	4	1.5	6	45	0.95
GM883912	1.0	4	1.5	8	45	0.95
GM883913	1.0	4	1.5	10	45	0.95
GM883914	1.0	4	1.5	12	45	0.95
GM883997	1.0	4	1.5	16	50	0.95
GM883998	1.0	4	1.5	20	55	0.95
GM883012	1.2	4	1.8	6	45	1.15
GM883015	1.5	4	2.3	6	45	1.45
GM883923	1.5	4	2.3	8	45	1.45
GM883924	1.5	4	2.3	10	45	1.45
GM883925	1.5	4	2.3	12	45	1.45
GM883927	1.5	4	2.3	16	50	1.45
GM883810	1.5	4	2.3	20	55	1.45

▶ NEXT PAGE


Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.015	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRC	13	25	28	32	10	29	32	38	15	35	15	23	10	15	26	3	25	130	230			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommend	○	○	○	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○		
ISO Material Description	N										S						H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	42	55	400	550	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend																		○	◎	◎	○	

CARBIDE, 2 FLUTE for RIB PROCESSING

- **VOLLHARTMETALL, 2 SCHNEIDEN für SCHMALE RIPPEN**
- **Fraise carbure, 2 dents pour usinage de rainure**
- **2 TAGLIENTI, SCARICATA PER NERVATURE**

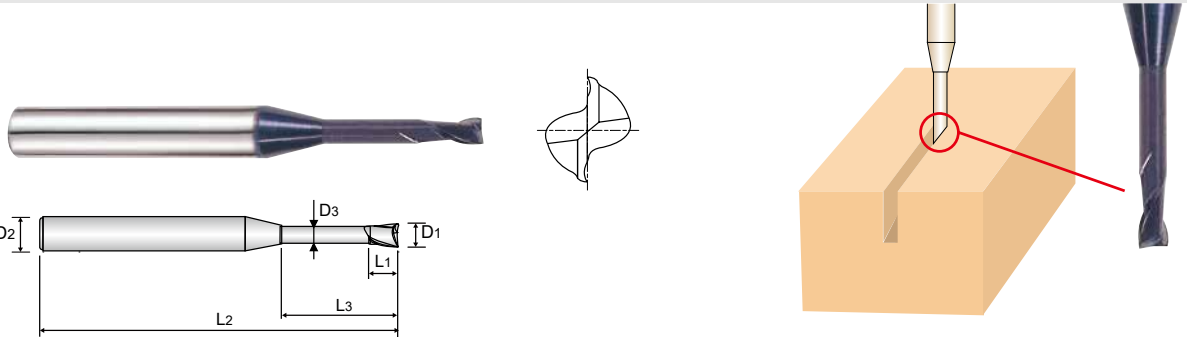

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	D1	D2	L1	L3	L2	D3
GM883946	1.8	4	2.7	12	45	1.75
GM883958	2.0	4	3	6	45	1.95
GM883020	2.0	4	3	8	45	1.95
GM883959	2.0	4	3	10	45	1.95
GM883960	2.0	4	3	12	45	1.95
GM883961	2.0	4	3	14	50	1.95
GM883962	2.0	4	3	16	50	1.95
GM883964	2.0	4	3	20	55	1.95
GM883966	2.0	4	3	25	60	1.95
GM883814	2.0	4	3	30	70	1.95
GM883970	2.5	4	3.7	16	55	2.40
GM883975	3.0	6	4.5	10	45	2.85
GM883976	3.0	6	4.5	12	45	2.85
GM883978	3.0	6	4.5	16	55	2.85
GM883979	3.0	6	4.5	18	55	2.85
GM883980	3.0	6	4.5	20	60	2.85
GM883981	3.0	6	4.5	25	65	2.85
GM883832	3.0	6	4.5	30	70	2.85
GM883983	3.0	6	4.5	40	90	2.85

▶ NEXT PAGE


Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.015	h5

◎ : Excellent ○ : Good

ISO Material Description	P					M			K												
	Non-alloy steel					Low alloy steel			High alloyed steel, and tool steel			Stainless steel		Grey cast iron		Nodular cast iron	Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	○	◎	◎	○	◎	◎	◎	○	◎				○	○	○	○	○	○	
ISO Material Description	N					S							H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		○	◎	◎	○

CARBIDE, 2 FLUTE for RIB PROCESSING

- VOLLHARTMETALL, 2 SCHNEIDEN für SCHMALE RIPPEN
- Fraise carbure, 2 dents pour usinage de rainure
- 2 TAGLIANTI, SCARICATA PER NERVATURE

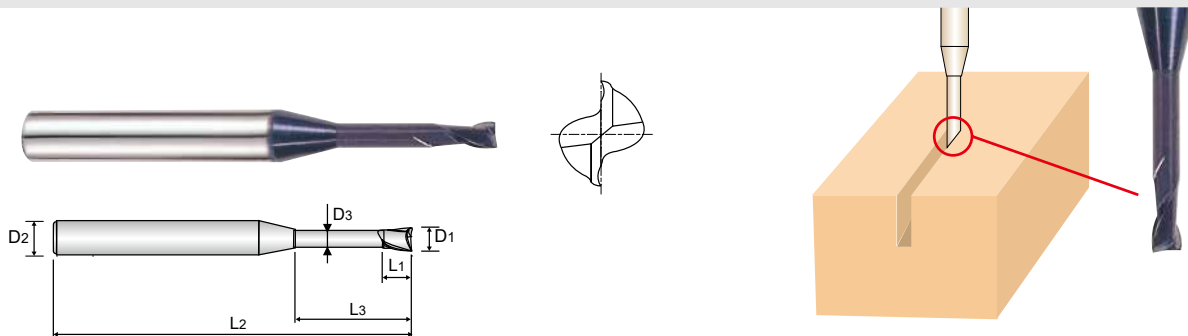

CARBIDE
2
30°
PLAIN
P.386-387

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	D1	D2	L1	L3	L2	D3
GM883801	4.0	6	6	16	60	3.85
GM883802	4.0	6	6	20	60	3.85
GM883803	4.0	6	6	25	70	3.85
GM883834	4.0	6	6	30	70	3.85
GM883836	4.0	6	6	40	90	3.85
GM883838	4.0	6	6	50	100	3.85
GM883807	6.0	6	9	30	90	5.85
GM883809	6.0	6	9	50	110	5.85

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ -0.015	h5

◎ : Excellent ○ : Good

ISO Material Description	P											M			K						
	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	130	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	○	◎	◎	○	◎	◎	◎	○	◎				○	○	○	○	○	○	
ISO Material Description	N					S										H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials	Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																○	○	◎	◎	○	○


GM883 SERIES

2 FLUTE RIB PROCESSING

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.
Ap = mm

ISO	VDI 3323	Material Description	Parameter	Diameter (Ø)							
				0.4	0.5	0.6	0.7	0.8	0.9	1.0	1.2
P	1-4	Non-alloy steel	Vc	39~50	49~63	58~75	68~88	68~88	71~89	71~88	70~85
			fz	0.003~0.006	0.003~0.006	0.004~0.007	0.004~0.007	0.005~0.009	0.006~0.011	0.006~0.014	0.008~0.020
			RPM	32550~42000	32550~42000	32550~42000	32550~42000	28350~36750	26250~33080	23630~29400	19430~23630
			FEED	210~460	210~460	265~600	265~600	295~660	295~755	295~850	295~945
			Ap	0.007~0.018	0.009~0.022	0.011~0.026	0.012~0.031	0.014~0.035	0.030~0.060	0.045~0.090	0.055~0.100
			Vc	28~35	35~44	42~53	49~62	49~62	49~64	49~63	49~62
	5	Non-alloy steel	fz	0.002~0.006	0.002~0.006	0.002~0.008	0.002~0.008	0.003~0.010	0.005~0.012	0.006~0.015	0.007~0.018
			RPM	23630~29400	23630~29400	23630~29400	23630~29400	20480~25730	18380~23630	16490~21000	13650~17330
			FEED	90~355	90~355	115~450	115~450	125~505	170~565	200~630	200~630
			Ap	0.007~0.018	0.009~0.022	0.011~0.026	0.012~0.031	0.014~0.035	0.030~0.060	0.045~0.090	0.055~0.100
			Vc	39~50	49~63	58~75	68~88	68~88	71~89	71~88	70~85
			fz	0.003~0.006	0.003~0.006	0.004~0.007	0.004~0.007	0.005~0.009	0.006~0.011	0.006~0.014	0.008~0.020
6-7	Low alloy steel	RPM	32550~42000	32550~42000	32550~42000	32550~42000	28350~36750	26250~33080	23630~29400	19430~23630	
		FEED	210~460	210~460	265~600	265~600	295~660	295~755	295~850	295~945	
		Ap	0.007~0.018	0.009~0.022	0.011~0.026	0.012~0.031	0.014~0.035	0.030~0.060	0.045~0.090	0.055~0.100	
		Vc	28~35	35~44	42~53	49~62	49~62	49~64	49~63	49~62	
		fz	0.002~0.006	0.002~0.006	0.002~0.008	0.002~0.008	0.003~0.010	0.005~0.012	0.006~0.015	0.007~0.018	
		RPM	23630~29400	23630~29400	23630~29400	23630~29400	20480~25730	18380~23630	16490~21000	13650~17330	
8-9	Low alloy steel	FEED	90~355	90~355	115~450	115~450	125~505	170~565	200~630	200~630	
		Ap	0.007~0.018	0.009~0.022	0.011~0.026	0.012~0.031	0.014~0.035	0.030~0.060	0.045~0.090	0.055~0.100	
		Vc	39~50	49~63	58~75	68~88	68~88	71~89	71~88	70~85	
		fz	0.003~0.006	0.003~0.006	0.004~0.007	0.004~0.007	0.005~0.009	0.006~0.011	0.006~0.014	0.008~0.020	
		RPM	32550~42000	32550~42000	32550~42000	32550~42000	28350~36750	26250~33080	23630~29400	19430~23630	
		FEED	210~460	210~460	265~600	265~600	295~660	295~755	295~850	295~945	
10	High alloyed steel, and tool steel	Ap	0.007~0.018	0.009~0.022	0.011~0.026	0.012~0.031	0.014~0.035	0.030~0.060	0.045~0.090	0.055~0.100	
		Vc	28~35	35~44	42~53	49~62	49~62	49~64	49~63	49~62	
		fz	0.002~0.006	0.002~0.006	0.002~0.008	0.002~0.008	0.003~0.010	0.005~0.012	0.006~0.015	0.007~0.018	
		RPM	23630~29400	23630~29400	23630~29400	23630~29400	20480~25730	18380~23630	16490~21000	13650~17330	
		FEED	90~355	90~355	115~450	115~450	125~505	170~565	200~630	200~630	
		Ap	0.007~0.018	0.009~0.022	0.011~0.026	0.012~0.031	0.014~0.035	0.030~0.060	0.045~0.090	0.055~0.100	
11.1 11.2	High alloyed steel, and tool steel	Vc	39~50	49~63	58~75	68~88	68~88	71~89	71~88	70~85	
		fz	0.003~0.006	0.003~0.006	0.004~0.007	0.004~0.007	0.005~0.009	0.006~0.011	0.006~0.014	0.008~0.020	
		RPM	32550~42000	32550~42000	32550~42000	32550~42000	28350~36750	26250~33080	23630~29400	19430~23630	
		FEED	210~460	210~460	265~600	265~600	295~660	295~755	295~850	295~945	
		Ap	0.007~0.018	0.009~0.022	0.011~0.026	0.012~0.031	0.014~0.035	0.030~0.060	0.045~0.090	0.055~0.100	
		Vc	28~35	35~44	42~53	49~62	49~62	49~64	49~63	49~62	
K	15-20	Grey cast iron Nodular cast iron Malleable cast iron	fz	0.003~0.006	0.003~0.006	0.004~0.007	0.004~0.007	0.005~0.009	0.006~0.011	0.006~0.014	0.008~0.020
			RPM	32550~42000	32550~42000	32550~42000	32550~42000	28350~36750	26250~33080	23630~29400	19430~23630
			FEED	210~460	210~460	265~600	265~600	295~660	295~755	295~850	295~945
			Ap	0.007~0.018	0.009~0.022	0.011~0.026	0.012~0.031	0.014~0.035	0.030~0.060	0.045~0.090	0.055~0.100
			Vc	39~50	49~63	58~75	68~88	68~88	71~89	71~88	70~85
			fz	0.003~0.006	0.003~0.006	0.004~0.007	0.004~0.007	0.005~0.009	0.006~0.011	0.006~0.014	0.008~0.020
	38.1 38.2	Hardened steel	RPM	32550~42000	32550~42000	32550~42000	32550~42000	28350~36750	26250~33080	23630~29400	19430~23630
			FEED	30~95	30~95	40~115	40~115	45~130	60~135	70~135	70~135
			Ap	0.004~0.008	0.004~0.009	0.005~0.011	0.006~0.013	0.007~0.015	0.008~0.016	0.009~0.018	0.010~0.022
			Vc	18~21	22~27	27~32	31~37	31~37	31~35	31~39	31~40
			fz	0.001~0.003	0.001~0.003	0.001~0.003	0.001~0.003	0.002~0.004	0.003~0.005	0.003~0.005	0.004~0.006
			RPM	15020~17850	15020~17850	15020~17850	15020~17850	13130~15540	11550~13130	10500~13130	8720~11030
H	40	Chilled Cast Iron	FEED	30~95	30~95	40~115	40~115	45~130	60~135	70~135	
			Ap	0.004~0.008	0.004~0.009	0.005~0.011	0.006~0.013	0.007~0.015	0.008~0.016	0.009~0.018	0.010~0.022
			Vc	28~35	35~44	42~53	49~62	49~62	49~64	49~63	49~62
			fz	0.002~0.006	0.002~0.006	0.002~0.008	0.002~0.008	0.003~0.010	0.005~0.012	0.006~0.015	0.007~0.018
			RPM	23630~29400	23630~29400	23630~29400	23630~29400	20480~25730	18380~23630	16490~21000	13650~17330
			FEED	90~355	90~355	115~450	115~450	125~505	170~565	200~630	200~630
41	Hardened Cast Iron	Ap	0.007~0.018	0.009~0.022	0.011~0.026	0.012~0.031	0.014~0.035	0.030~0.060	0.045~0.090	0.055~0.100	
		Vc	18~21	22~27	27~32	31~37	31~37	31~35	31~39	31~40	
		fz	0.001~0.003	0.001~0.003	0.001~0.003	0.001~0.003	0.002~0.004	0.003~0.005	0.003~0.005	0.004~0.006	
		RPM	15020~17850	15020~17850	15020~17850	15020~17850	13130~15540	11550~13130	10500~13130	8720~11030	
		FEED	30~95	30~95	40~115	40~115	45~130	60~135	70~135	70~135	
		Ap	0.004~0.008	0.004~0.009	0.005~0.011	0.006~0.013	0.007~0.015	0.008~0.016	0.009~0.018	0.010~0.022	


▶ NEXT PAGE



Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.
Ap = mm

GM883 SERIES 2 FLUTE RIB PROCESSING

VDI 3323	Parameter	1.4	1.5	1.6	1.8	2.0	2.5	3.0	4.0	5.0	6.0
1-4	Vc	70~88	68~87	70~90	74~93	75~91	75~94	75~94	75~94	75~94	75~94
	fz	0.009~0.023	0.010~0.024	0.010~0.025	0.011~0.027	0.012~0.031	0.015~0.038	0.018~0.045	0.023~0.060	0.029~0.075	0.035~0.090
	RPM	16800~21000	15230~19430	14700~18900	13650~17330	12600~15230	9980~12600	8400~10500	6300~7880	5040~6300	4200~5250
	FEED	295~945	295~945	295~945	295~945	295~945	295~945	295~945	295~945	295~945	295~945
5	Ap	0.062~0.125	0.070~0.135	0.075~0.145	0.080~0.160	0.090~0.180	0.112~0.235	0.135~0.270	0.180~0.360	0.225~0.450	0.270~0.540
	Vc	51~62	49~64	51~64	52~65	52~66	53~67	52~66	52~67	52~66	53~66
	fz	0.008~0.021	0.009~0.022	0.009~0.023	0.010~0.026	0.011~0.029	0.014~0.035	0.017~0.043	0.023~0.057	0.029~0.071	0.034~0.086
	RPM	12080~14700	11030~14180	10710~13440	9660~12080	8720~11030	7040~8930	5780~7350	4310~5570	3470~4410	2940~3680
6-7	FEED	200~630	200~630	200~630	200~630	200~630	200~630	200~630	200~630	200~630	200~630
	Ap	0.062~0.125	0.070~0.135	0.075~0.145	0.080~0.160	0.090~0.180	0.112~0.235	0.135~0.270	0.180~0.360	0.225~0.450	0.270~0.540
	Vc	70~88	68~87	70~90	74~93	75~91	75~94	75~94	75~94	75~94	75~94
	fz	0.009~0.023	0.010~0.024	0.010~0.025	0.011~0.027	0.012~0.031	0.015~0.038	0.018~0.045	0.023~0.060	0.029~0.075	0.035~0.090
8-9	RPM	16800~21000	15230~19430	14700~18900	13650~17330	12600~15230	9980~12600	8400~10500	6300~7880	5040~6300	4200~5250
	FEED	295~945	295~945	295~945	295~945	295~945	295~945	295~945	295~945	295~945	295~945
	Ap	0.062~0.125	0.070~0.135	0.075~0.145	0.080~0.160	0.090~0.180	0.112~0.235	0.135~0.270	0.180~0.360	0.225~0.450	0.270~0.540
	Vc	51~62	49~64	51~64	52~65	52~66	53~67	52~66	52~67	52~66	53~66
10	fz	0.008~0.021	0.009~0.022	0.009~0.023	0.010~0.026	0.011~0.029	0.014~0.035	0.017~0.043	0.023~0.057	0.029~0.071	0.034~0.086
	RPM	12080~14700	11030~14180	10710~13440	9660~12080	8720~11030	7040~8930	5780~7350	4310~5570	3470~4410	2940~3680
	FEED	200~630	200~630	200~630	200~630	200~630	200~630	200~630	200~630	200~630	200~630
	Ap	0.062~0.125	0.070~0.135	0.075~0.145	0.080~0.160	0.090~0.180	0.112~0.235	0.135~0.270	0.180~0.360	0.225~0.450	0.270~0.540
11.1 - 11.2	Vc	70~88	68~87	70~90	74~93	75~91	75~94	75~94	75~94	75~94	75~94
	fz	0.009~0.023	0.010~0.024	0.010~0.025	0.011~0.027	0.012~0.031	0.015~0.038	0.018~0.045	0.023~0.060	0.029~0.075	0.035~0.090
	RPM	16800~21000	15230~19430	14700~18900	13650~17330	12600~15230	9980~12600	8400~10500	6300~7880	5040~6300	4200~5250
	FEED	295~945	295~945	295~945	295~945	295~945	295~945	295~945	295~945	295~945	295~945
15 - 20	Ap	0.062~0.125	0.070~0.135	0.075~0.145	0.080~0.160	0.090~0.180	0.112~0.235	0.135~0.270	0.180~0.360	0.225~0.450	0.270~0.540
	Vc	51~62	49~64	51~64	52~65	52~66	53~67	52~66	52~67	52~66	53~66
	fz	0.008~0.021	0.009~0.022	0.009~0.023	0.010~0.026	0.011~0.029	0.014~0.035	0.017~0.043	0.023~0.057	0.029~0.071	0.034~0.086
	RPM	12080~14700	11030~14180	10710~13440	9660~12080	8720~11030	7040~8930	5780~7350	4310~5570	3470~4410	2940~3680
38.1 - 38.2	FEED	200~630	200~630	200~630	200~630	200~630	200~630	200~630	200~630	200~630	200~630
	Ap	0.062~0.125	0.070~0.135	0.075~0.145	0.080~0.160	0.090~0.180	0.112~0.235	0.135~0.270	0.180~0.360	0.225~0.450	0.270~0.540
	Vc	32~40	32~39	32~40	32~41	33~41	34~42	33~41	33~41	33~41	33~49
	fz	0.005~0.007	0.005~0.008	0.005~0.008	0.006~0.009	0.006~0.010	0.008~0.012	0.009~0.015	0.013~0.020	0.015~0.025	0.019~0.025
40	RPM	7560~9450	7040~8610	6720~8400	5990~7560	5570~6930	4520~5570	3680~4620	2730~3470	2210~2730	1840~2730
	FEED	70~135	70~135	70~135	70~135	70~135	70~135	70~135	70~135	70~135	70~135
	Ap	0.012~0.025	0.014~0.028	0.015~0.030	0.016~0.032	0.018~0.035	0.022~0.045	0.028~0.055	0.036~0.072	0.045~0.090	0.054~0.108
	Vc	51~62	49~64	51~64	52~65	52~66	53~67	52~66	52~67	52~66	53~66
41	fz	0.008~0.021	0.009~0.022	0.009~0.023	0.010~0.026	0.011~0.029	0.014~0.035	0.017~0.043	0.023~0.057	0.029~0.071	0.034~0.086
	RPM	12080~14700	11030~14180	10710~13440	9660~12080	8720~11030	7040~8930	5780~7350	4310~5570	3470~4410	2940~3680
	FEED	200~630	200~630	200~630	200~630	200~630	200~630	200~630	200~630	200~630	200~630
	Ap	0.062~0.125	0.070~0.135	0.075~0.145	0.080~0.160	0.090~0.180	0.112~0.235	0.135~0.270	0.180~0.360	0.225~0.450	0.270~0.540
41	Vc	32~40	32~39	32~40	32~41	33~41	34~42	33~41	33~41	33~41	33~49
	fz	0.005~0.007	0.005~0.008	0.005~0.008	0.006~0.009	0.006~0.010	0.008~0.012	0.009~0.015	0.013~0.020	0.015~0.025	0.019~0.025
	RPM	7560~9450	7040~8610	6720~8400	5990~7560	5570~6930	4520~5570	3680~4620	2730~3470	2210~2730	1840~2730
	FEED	70~135	70~135	70~135	70~135	70~135	70~135	70~135	70~135	70~135	70~135
41	Ap	0.012~0.025	0.014~0.028	0.015~0.030	0.016~0.032	0.018~0.035	0.022~0.045	0.028~0.055	0.036~0.072	0.045~0.090	0.054~0.108



SELECTION GUIDE



SERIES	GM876	GM813	GM886	GM902
FLUTE	2	2	2	2
HELIX ANGLE	30°	30°	30°	30°
CUTTING EDGE SHAPE	BALL NOSE	BALL NOSE	BALL NOSE	BALL NOSE
SIZE MIN	R0.5	R0.5	R0.25	R0.5
SIZE MAX	R8.0	R10.0	R3.0	R4.0
PAGE	350	351	352	354

SOLID CARBIDE
X-POWER PRO
END MILLS

for Pre-Hardened Steels up to HRC55,
 Mold & Die, Dry & Wet Cutting

SHORT LENGTH	LONG LENGTH	RIB PROCESSING	TAPER NECK
Y-Coating	Y-Coating	Y-Coating	Y-Coating



Please visit
globalyg1.com/mat
 for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P 372

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRC					
P	1	Non-alloy steel	About 0.15% C Annealed	125		○	○	○	○	
	2		About 0.45% C Annealed	190	13	○	○	○	○	
	3		About 0.45% C Quenched & Tempered	250	25	○	○	○	○	
	4		About 0.75% C Annealed	270	28	◎	◎	◎	○	
	5		About 0.75% C Quenched & Tempered	300	32	◎	◎	◎	○	
	6	Low alloy steel	Annealed	180	10	○	○	○	○	
	7		Quenched & Tempered	275	29	◎	◎	◎	○	
	8		Quenched & Tempered	300	32	◎	◎	◎	◎	
	9		Quenched & Tempered	350	38	◎	◎	◎	◎	
	10		High alloyed steel, and tool steel	Annealed	200	15	○	○	○	○
	11			Quenched & Tempered	325	35	◎	◎	◎	◎
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15					
	13		Martensitic Quenched & Tempered	240	23					
	14		Austenitic	180	10					
K	15	Grey cast iron	Pearlitic / ferritic	180	10	○	○	○		
	16		Pearlitic (Martensitic)	260	26	○	○	○		
	17	Nodular cast iron	Ferritic	160	3	○	○	○		
	18		Pearlitic	250	25	○	○	○		
	19		Ferritic	130		○	○	○		
20	Malleable cast iron	Pearlitic	230	21	○	○	○			
N	21	Aluminum-wrought alloy	Not Curable	60						
	22		Curable Hardened	100						
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75						
	24		≤ 12% Si, Curable Hardened	90						
	25		> 12% Si, Not Curable	130						
	26		Cutting Alloys, PB>1%	110						
	27	Copper and Copper Alloys	CuZn, CuSnZn (Brass)	90						
	28		CuSn, lead-free copper and electrolytic copper	100						
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic							
	30		Rubber, Wood, etc.							
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15					
	32		Cured	280	30					
	33		Annealed	250	25					
	34		Ni or Co Based Cured	350	38					
	35		Cast	320	34					
	36	Titanium Alloys	Pure Titanium	400 Rm						
	37		Alpha + Beta Alloys Hardened	1050 Rm						
H	38	Hardened steel	Hardened	550	55	○	○	○	○	
	39		Hardened	630	60	○	○	○	○	
	40	Chilled Cast Iron	Cast	400	42	◎	◎	◎	◎	
	41	Hardened Cast Iron	Hardened	550	55	○	○	○	○	

GM815	GM818	GM8A1	GM839	GM819	GM810	GM883	GM895	GM811	GM817	GM812	GM834	GM814
4	2	2	4	4	2	2	3	4	4	6&8	6	3&4
30°	30°	30°	30°	30°	30°	30°	38°	30°	30°	45°	45°	20°
BALL NOSE	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	ROUGHING
R1.0	D4.0	D1.0	D2.0	D3.0	D0.4	D0.4	D1.0	D2.0	D2.0	D6.0	D6.0	D6.0
R8.0	D12.0	D6.0	D12.0	D20.0	D20.0	D6.0	D16.0	D25.0	D20.0	D20.0	D25.0	D20.0
355	356	357	359	360	361	363	366	367	368	369	370	371
LONG LENGTH	LONG LENGTH	RIB PROCESSING	STUB LENGTH	LONG LENGTH	SHORT LENGTH	RIB PROCESSING	SHORT LENGTH	SHORT LENGTH	LONG LENGTH	LONG LENGTH	EXTRA LONG LENGTH	LONG LENGTH
Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating

○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙
○	○	○	○	○	○	○	○	○	○	○	○	○
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙
○	○	○	○	○	○	○	○	○	○	○	○	○
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙
				○	○		○	○				○
				○	○		○	○				○
				○	○		○	○				○
○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙
○	○	○	○	○	○	○	○	○	○	○	○	○

HSS

CBN END MILLS

i-Xmill END MILLS

i-SMART MODULAR END MILLS

X5070 END MILLS

4G MILL END MILLS

X-POWER PRO END MILLS

TitaNox-POWER END MILLS

JET-POWER END MILLS

V7 PLUS END MILLS

ALU-POWER HPC END MILLS

ALU-POWER END MILLS

D-POWER GRAPHITE END MILLS

D-POWER CFRP END MILLS

ROUTERS

CRX S END MILLS

K-2 END MILLS

ONLY ONE COATED PM60 END MILLS

TANK-POWER END MILLS

GENERAL HSS END MILLS

MILLING CUTTERS

TECHNICAL DATA