


CARBIDE, 2 FLUTE BALL NOSE with TAPER NECK

- **VOLLHARTMETALL, 2 SCHNEIDEN KUGELSTIRN mit KONISCH ABGESETZTEM SCHAFTTEIL**
- **Fraise carbure, 2 dents, hémisphérique avec entrée conique**
- **2 TAGLIENTI, SEMISFERICA, SCARICO CONICO**

▶ High efficiency milling in deep slotting due to long projection of the end mills.

▶ Effizientes Tiefnutenfräsen von tiefliegenden Bereichen möglich.

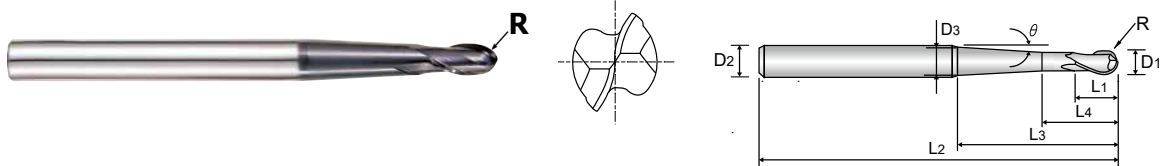

CARBIDE 2 30° ±0.01 PLAIN P.376-377

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Under Neck Parallel Length	Length Below Shank	Overall Length	Neck Diameter	Taper Neck Angle
	R(±0.01)	D1	D2	L1	L4	L3	L2	D3	θ
GM902010	R0.5	1.0	6	2	4	23	60	2	1° 30'
GM902901	R0.5	1.0	6	2	4	23	60	4.3	5°
GM902902	R0.5	1.0	6	2	4	42	80	5	3°
GM902020	R1.0	2.0	6	4	6	23	60	2.9	1° 30'
GM902903	R1.0	2.0	6	4	6	23	60	5	5°
GM902904	R1.0	2.0	6	4	6	41	80	5.7	3°
GM902030	R1.5	3.0	6	6	8	32	70	5.6	3°
GM902905	R1.5	3.0	6	6	8	52	90	5.3	1° 30'
GM902040	R2.0	4.0	6	8	10	28	70	5.9	3°
GM902906	R2.0	4.0	6	8	10	49	90	6	1° 30'
GM902060	R3.0	6.0	8	12	15	34	90	8	3°
GM902908	R3.0	6.0	8	12	15	53	110	8	1° 30'
GM902080	R4.0	8.0	10	14	17	36	100	10	3°
GM902909	R4.0	8.0	10	14	17	55	120	10	1° 30'

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P											M			K						
	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron	Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	○	○	○	○	○	○	◎	○	◎										
ISO Material Description	N										S							H			
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		○		◎	○

GM902 SERIES


2 FLUTE BALL NOSE with TAPER NECK

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.
Ap = mm

NORMAL SPEED

ISO	VDI 3323	Material Description	Ae	Parameter	Diameter (Ø)						
					1.0	2.0	3.0	4.0	5.0	6.0	8.0
H	5	Non-alloy steel	0.2D	Vc	35	60	80	90	95	110	120
				fz	0.008	0.014	0.023	0.031	0.040	0.060	0.080
				RPM	11141	9549	8488	7162	6048	5836	4775
				FEED	178	267	390	444	484	700	764
	8-9	Low alloy steel	0.2D	Vc	35	60	80	90	95	110	120
				fz	0.008	0.014	0.023	0.031	0.040	0.060	0.080
				RPM	11141	9549	8488	7162	6048	5836	4775
				FEED	178	267	390	444	484	700	764
	11.1	High alloyed steel, and tool steel	0.2D	Vc	35	60	80	90	95	110	120
				fz	0.008	0.014	0.023	0.031	0.040	0.060	0.080
				RPM	11141	9549	8488	7162	6048	5836	4775
				FEED	178	267	390	444	484	700	764
11.2	High alloyed steel, and tool steel	0.1D	Vc	55	75	100	110	125	135	150	
			fz	0.012	0.028	0.043	0.052	0.059	0.067	0.075	
			RPM	17507	11937	10610	8754	7958	7162	5968	
			FEED	420	668	912	910	939	960	895	
H	38.1	Hardened steel	0.1D	Vc	55	75	100	110	125	135	150
				fz	0.012	0.028	0.043	0.052	0.059	0.067	0.075
				RPM	17507	11937	10610	8754	7958	7162	5968
				FEED	420	668	912	910	939	960	895
	38.2	Hardened steel	0.1D	Vc	55	75	95	110	125	130	140
				fz	0.012	0.026	0.043	0.052	0.059	0.068	0.075
				RPM	17507	11937	10080	8754	7958	6897	5570
				FEED	420	621	867	910	939	938	836
	40	Chilled Cast Iron	0.1D	Vc	55	75	100	110	125	135	150
				fz	0.012	0.028	0.043	0.052	0.059	0.067	0.075
				RPM	17507	11937	10610	8754	7958	7162	5968
				FEED	420	668	912	910	939	960	895
41	Hardened Cast Iron	0.1D	Vc	55	75	95	110	125	130	140	
			fz	0.012	0.026	0.043	0.052	0.059	0.068	0.075	
			RPM	17507	11937	10080	8754	7958	6897	5570	
			FEED	420	621	867	910	939	938	836	
H	41	Hardened Cast Iron	0.1D	Vc	55	75	95	110	125	130	140
				fz	0.012	0.026	0.043	0.052	0.059	0.068	0.075
				RPM	17507	11937	10080	8754	7958	6897	5570
				FEED	420	621	867	910	939	938	836
H	41	Hardened Cast Iron	0.1D	Vc	55	75	95	110	125	130	140
				fz	0.012	0.026	0.043	0.052	0.059	0.068	0.075
				RPM	17507	11937	10080	8754	7958	6897	5570
				FEED	420	621	867	910	939	938	836

► NEXT PAGE




GM902 SERIES
2 FLUTE BALL NOSE with TAPER NECK

Vc = m/min.
 fz = mm/tooth
 RPM = rev./min.
 FEED = mm/min.
 Ap = mm

HIGH SPEED

ISO	VDI 3323	Material Description	Ae	Parameter	Diameter (Ø)						
					1.0	2.0	3.0	4.0	5.0	6.0	8.0
P	1-5	Non-alloy steel	0.05D	Vc	65	110	165	220	275	335	355
				fz	0.026	0.036	0.048	0.07	0.086	0.095	0.119
				RPM	20690	17507	17507	17507	17507	17772	14125
				FEED	1076	1261	1681	2451	3011	3377	3362
	6-9	Low alloy steel	0.05D	Vc	65	110	165	220	275	335	355
				fz	0.026	0.036	0.048	0.070	0.086	0.095	0.119
				RPM	20690	17507	17507	17507	17507	17772	14125
				FEED	1076	1261	1681	2451	3011	3377	3362
	10-11.2	High alloyed steel, and tool steel	0.05D	Vc	65	110	165	220	275	335	355
fz				0.026	0.036	0.048	0.07	0.086	0.095	0.119	
RPM				20690	17507	17507	17507	17507	17772	14125	
FEED				1076	1261	1681	2451	3011	3377	3362	
K	15-20	Grey cast iron Nodular cast iron Malleable cast iron	0.05D	Vc	65	110	165	220	275	335	355
				fz	0.026	0.036	0.048	0.07	0.086	0.095	0.119
				RPM	20690	17507	17507	17507	17507	17772	14125
				FEED	1076	1261	1681	2451	3011	3377	3362
H	38	Hardened steel	0.05D	Vc	55	75	100	110	125	135	150
				fz	0.019	0.037	0.069	0.080	0.088	0.101	0.112
				RPM	17507	11937	10610	8754	7958	7162	5968
				FEED	665	883	1464	1401	1401	1447	1337
	38.2	Hardened steel	0.05D	Vc	55	75	95	110	120	130	140
				fz	0.017	0.043	0.066	0.079	0.087	0.102	0.109
				RPM	17507	11937	10080	8754	7639	6897	5570
				FEED	595	1027	1331	1383	1329	1407	1214
	40	Chilled Cast Iron	0.05D	Vc	65	110	165	220	275	335	355
				fz	0.026	0.036	0.048	0.07	0.086	0.095	0.119
				RPM	20690	17507	17507	17507	17507	17772	14125
				FEED	1076	1261	1681	2451	3011	3377	3362
	41	Hardened Cast Iron	0.05D	Vc	55	75	95	110	120	130	140
				fz	0.017	0.043	0.066	0.079	0.087	0.102	0.109
				RPM	17507	11937	10080	8754	7639	6897	5570
				FEED	595	1027	1331	1383	1329	1407	1214
			0.05D	Vc	55	75	95	110	120	130	140
				fz	0.017	0.043	0.066	0.079	0.087	0.102	0.109
				RPM	17507	11937	10080	8754	7639	6897	5570
				FEED	595	1027	1331	1383	1329	1407	1214
			0.05D	Vc	55	75	95	110	120	130	140
				fz	0.017	0.043	0.066	0.079	0.087	0.102	0.109
				RPM	17507	11937	10080	8754	7639	6897	5570
				FEED	595	1027	1331	1383	1329	1407	1214
			0.05D	Vc	55	75	95	110	120	130	140
				fz	0.017	0.043	0.066	0.079	0.087	0.102	0.109
				RPM	17507	11937	10080	8754	7639	6897	5570
				FEED	595	1027	1331	1383	1329	1407	1214
			0.05D	Vc	55	75	95	110	120	130	140
				fz	0.017	0.043	0.066	0.079	0.087	0.102	0.109
				RPM	17507	11937	10080	8754	7639	6897	5570
				FEED	595	1027	1331	1383	1329	1407	1214



SELECTION GUIDE



SERIES	GM876	GM813	GM886	GM902
FLUTE	2	2	2	2
HELIX ANGLE	30°	30°	30°	30°
CUTTING EDGE SHAPE	BALL NOSE	BALL NOSE	BALL NOSE	BALL NOSE
SIZE MIN	R0.5	R0.5	R0.25	R0.5
SIZE MAX	R8.0	R10.0	R3.0	R4.0
PAGE	350	351	352	354

SOLID CARBIDE
X-POWER PRO
END MILLS

for Pre-Hardened Steels up to HRc55,
 Mold & Die, Dry & Wet Cutting

SHORT LENGTH	LONG LENGTH	RIB PROCESSING	TAPER NECK
Y-Coating	Y-Coating	Y-Coating	Y-Coating



Please visit
globalyg1.com/mat
 for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P 372

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	Short Length	Long Length	Rib Processing	Taper Neck	
P	1	Non-alloy steel	About 0.15% C Annealed	125		○	○	○	○	
	2		About 0.45% C Annealed	190	13	○	○	○	○	
	3		About 0.45% C Quenched & Tempered	250	25	○	○	○	○	
	4		About 0.75% C Annealed	270	28	◎	◎	◎	○	
	5		About 0.75% C Quenched & Tempered	300	32	◎	◎	◎	○	
	6	Low alloy steel	Annealed	180	10	○	○	○	○	
	7		Quenched & Tempered	275	29	◎	◎	◎	○	
	8		Quenched & Tempered	300	32	◎	◎	◎	◎	
	9		Quenched & Tempered	350	38	◎	◎	◎	◎	
	10		High alloyed steel, and tool steel	Annealed	200	15	○	○	○	○
	11			Quenched & Tempered	325	35	◎	◎	◎	◎
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15					
	13		Martensitic Quenched & Tempered	240	23					
	14		Austenitic	180	10					
K	15	Grey cast iron	Pearlitic / ferritic	180	10	○	○	○		
	16		Pearlitic (Martensitic)	260	26	○	○	○		
	17	Nodular cast iron	Ferritic	160	3	○	○	○		
	18		Pearlitic	250	25	○	○	○		
	19		Ferritic	130		○	○	○		
20	Malleable cast iron	Pearlitic	230	21	○	○	○			
N	21	Aluminum-wrought alloy	Not Curable	60						
	22		Curable Hardened	100						
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75						
	24		≤ 12% Si, Curable Hardened	90						
	25		> 12% Si, Not Curable	130						
	26		Cutting Alloys, PB>1%	110						
	27	Copper and Copper Alloys (Bronze / Brass)	CuZn, CuSnZn (Brass)	90						
	28		CuSn, lead-free copper and electrolytic copper	100						
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic							
	30		Rubber, Wood, etc.							
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15					
	32		Cured	280	30					
	33		Annealed	250	25					
	34		Ni or Co Based Cured	350	38					
	35		Cast	320	34					
	36	Titanium Alloys	Pure Titanium	400 Rm						
	37		Alpha + Beta Alloys Hardened	1050 Rm						
H	38	Hardened steel	Hardened	550	55	○	○	○	○	
	39		Hardened	630	60	○	○	○	○	
	40	Chilled Cast Iron	Cast	400	42	◎	◎	◎	◎	
	41	Hardened Cast Iron	Hardened	550	55	○	○	○	○	