


X-5070

G8SETA46

CARBIDE, 2F BALL NOSE For RIB PROCESSING END MILL - Rib Processing on High Hardened Steels up to HRC70
 VHM-Miniaturradiusfräser mit Freilängen, Z=2 - HSC-Fräser für gehärtete Stähle bis 70HRc
 CARBURE, 2 DENTS, HEMISPHERIQUE pour PAROIS MINCES - Parois Minces sur Aciers traités jusqu'à 70 HRc
 FRESA A CANDELA M.D., 2 ELICHE, SEMISFERICA, PER CAVITA' PROFONDE - Alte Velocità su acciai temprati fino a 70 HRc
 MD, 2 LABIOS, ESFERICA PARA ACANALAR - Acanalar en aceros templados por encima de HRc 70

Coated



unit:mm

EDP No. (PLAIN)	R ±0.005	MILL DIAMETER	EFFECTIVE LENGTH	SHANK DIAMETER	LENGTH OF CUT	OVERALL LENGTH	NECK DIAMETER	Pcs
G8A46004	RO.2	0.4	1	4	0.4	45	0.37	1
G8A46005	RO.25	0.5	2	4	0.4	45	0.45	1
G8A46957	RO.3	0.6	2	4	0.5	45	0.55	1
G8A46008	RO.4	0.8	6	4	0.6	45	0.75	1
G8A46010	RO.5	1.0	6	4	0.8	45	0.95	1
G8A46012	RO.6	1.2	8	4	1	45	1.15	1
G8A46931	RO.75	1.5	10	4	1.2	45	1.45	1
G8A46942	R1.0	2.0	12	4	1.6	50	1.95	1



**8
PCS**



MILL DIA TOLERANCE(mm)	SHANK DIA TOLERANCE
0 -0.012	h6

**TANK-
POWER**

GASETA26

PREMIUM HSS-PM, MULTI FLUTE, 45° HELIX, SHORT, FINE PITCH ROUGHING - High Speed Cutting and High Performance
 PM-Schafffräser, Mehrschneidig, kurze Ausführung - HSC/ HPC-Ausführung
 ACIER RAPIDE FRITTE QUALITE SUPERIEURE, MULTICOUPE, HELICE 45°, EBAUCHE PAS FINS SERIE COURTE - Fraisage UGV Haute Performance
 FRESA HSS-PM PREMIUM, MULTITAGLIENTE, ELICA 45°, CORTA, SGROSS. PASSO FINE - Alte Velocità di taglio ed alte prestazioni
 PREMIUM HSS-PM, MULTI LABIO, 45° HELICE, NORMAL, DESBASTE PASO FINO - Corte a alta velocidad y alto rendimiento

Coated

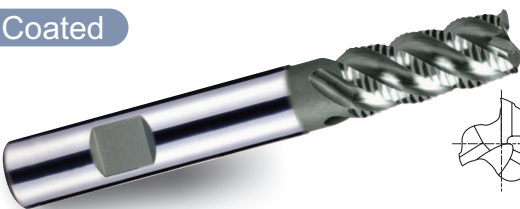

unit:mm

EDP No. (FLAT)	MILL DIAMETER	SHANK DIAMETER	LENGTH OF CUT	LENGTH BELOW SHANK	OVERALL LENGTH	NECK DIAMETER	No. of FLUTE	Pcs
GAA26040	4.0	6	11	-	57	-	3	1
GAA26050	5.0	6	13	-	57	-	4	1
GAA26060	6.0	6	13	-	57	-	4	1
GAA26080	8.0	10	19	-	69	-	4	1
GAA26100	10.0	10	22	31	72	9.5	4	1
GAA26120	12.0	12	26	37	83	11.5	4	1
GAA26160	16.0	16	32	44	92	15	5	1
GAA26200	20.0	20	38	54	104	19	6	1

Tolerances according to DIN 7160 & 7161

μm = 1/1000mm

Tolerance range in μm		Nominal-Diameter in mm					
		from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
js12		± 50	± 60	± 75	± 90	± 105	± 125
h6		0 -6	0 -8	0 -9	0 -11	0 -13	0 -16

**8
PCS**




2 • phone:+82-32-526-0909, fax:+82-32-526-4373, www.yg1.kr, E-mail:yg1@yg1.kr



CARBIDE, 2 FLUTE BALL NOSE for RIB PROCESSING
VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS für SCHMALE RIPPEN

- ▶ Designed to machine high hardened materials.
 - ▶ Suitable for dry cutting, high speed cutting thanks to newly developed raw-material and new coating.
 - ▶ Excellent workpiece finish.
 - ▶ Designed for high precision milling operation.
 - ▶ Higher wear-resistance.
- ▶ Geeignet zum Fräsen hochgehärteter Stähle.
 - ▶ Geeignet zum Trockenfräsen und HSC-Fräsen dank neuentwickeltem Material und Beschichtung.
 - ▶ Excellente Werkstückoberflächen.
 - ▶ Geeignet für hochpräzises Fräsen.
 - ▶ Höhere Verschleißfestigkeit.

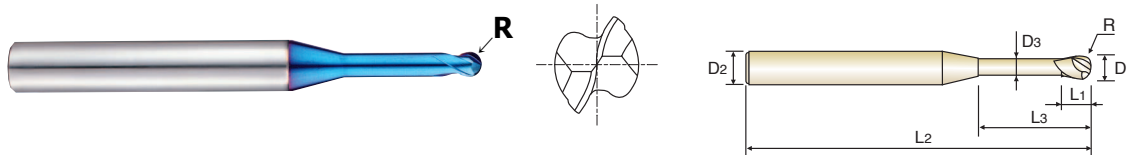

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R (±0.005)	D1	D2	L1	L3	L2	D3
G8A46805	RO.05	0.1	4	0.1	0.3	45	0.085
G8A46806	RO.05	0.1	4	0.1	0.5	45	0.085
G8A46002	RO.1	0.2	4	0.2	0.5	45	0.17
G8A46977	RO.1	0.2	4	0.2	1	45	0.17
G8A46958	RO.1	0.2	4	0.2	1.5	45	0.17
G8A46003	RO.15	0.3	4	0.3	1	45	0.27
G8A46959	RO.15	0.3	4	0.3	2	45	0.27
G8A46986	RO.15	0.3	4	0.3	3	45	0.27
G8A46004	RO.2	0.4	4	0.4	1	45	0.37
G8A46960	RO.2	0.4	4	0.4	2	45	0.37
G8A46961	RO.2	0.4	4	0.4	3	45	0.37
G8A46981	RO.2	0.4	4	0.4	4	45	0.37
G8A46987	RO.2	0.4	4	0.4	5	45	0.37
G8A46005	RO.25	0.5	4	0.4	2	45	0.45
G8A46804	RO.25	0.5	4	0.4	2.5	45	0.45
G8A46962	RO.25	0.5	4	0.4	4	45	0.45
G8A46963	RO.25	0.5	4	0.4	6	45	0.45
G8A46964	RO.25	0.5	4	0.4	8	45	0.45
G8A46957	RO.3	0.6	4	0.5	2	45	0.55
G8A46988	RO.3	0.6	4	0.5	3	45	0.55
G8A46915	RO.3	0.6	4	0.5	4	45	0.55
G8A46989	RO.3	0.6	4	0.5	5	45	0.55
G8A46916	RO.3	0.6	4	0.5	6	45	0.55
G8A46917	RO.3	0.6	4	0.5	8	45	0.55
G8A46990	RO.3	0.6	4	0.5	10	45	0.55
G8A46918	RO.4	0.8	4	0.6	2	45	0.75
G8A46919	RO.4	0.8	4	0.6	4	45	0.75
G8A46008	RO.4	0.8	4	0.6	6	45	0.75
G8A46901	RO.4	0.8	4	0.6	8	45	0.75

Due to the characteristics of blue decoration layer which might be erased during short term using, the color layer might not be uniform moreover.
However, it doesn't effect on performance of tool.

◎ : Excellent ○ : Good

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		High Hardened Steels	Copper	Graphite	Cast Iron	Aluminum	Stainless Steels	Titanium	Inconel	Acrylic	CFRP
~HB225	HB225~325	HRC30~40	HRc40~45	HRc45~55	HRc55~70									
		○	○	◎	◎									



**X5070
END MILLS**


G8A46 SERIES

**PLAIN SHANK
GLATTER ZYLINDERSCHAFT**

CARBIDE, 2 FLUTE BALL NOSE for RIB PROCESSING
VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS für SCHMALE RIPPEN

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting, high speed cutting thanks to newly developed raw-material and new coating.
- ▶ Excellent workpiece finishes.
- ▶ Designed for high precision milling operation.
- ▶ Higher wear-resistance.

- ▶ Geeignet zum Fräsen hochgehärteter Stähle.
- ▶ Geeignet zum Trockenfräsen und HSC-Fräsen dank neuentwickeltem Material und Beschichtung.
- ▶ Exzellente Werkstückoberflächen.
- ▶ Geeignet für hochpräzises Fräsen.
- ▶ Höhere Verschleißfestigkeit.

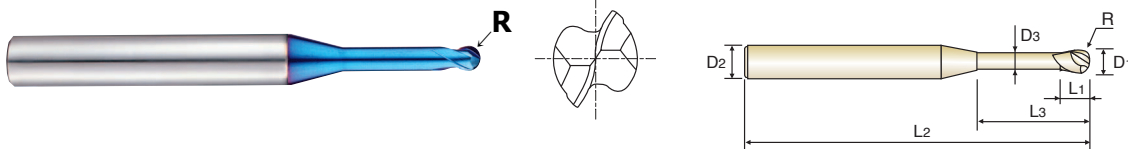

P.687

Unit : mm

EDP No.	Radius of Ball Nose R (±0.005)	Mill Diameter D1	Shank Diameter D2	Length of Cut L1	Length Below Shank L3	Overall Length L2	Neck Diameter D3
G8A46965	RO.4	0.8	4	0.6	10	45	0.75
G8A46920	RO.5	1.0	4	0.8	3	45	0.95
G8A46921	RO.5	1.0	4	0.8	4	45	0.95
G8A46923	RO.5	1.0	4	0.8	5	45	0.95
G8A46010	RO.5	1.0	4	0.8	6	45	0.95
G8A46924	RO.5	1.0	4	0.8	7	45	0.95
G8A46902	RO.5	1.0	4	0.8	8	45	0.95
G8A46925	RO.5	1.0	4	0.8	9	45	0.95
G8A46903	RO.5	1.0	4	0.8	10	45	0.95
G8A46904	RO.5	1.0	4	0.8	12	45	0.95
G8A46926	RO.5	1.0	4	0.8	14	50	0.95
G8A46927	RO.5	1.0	4	0.8	16	50	0.95
G8A46966	RO.5	1.0	4	0.8	20	55	0.95
G8A46982	RO.6	1.2	4	1.0	6	45	1.15
G8A46012	RO.6	1.2	4	1.0	8	45	1.15
G8A46983	RO.6	1.2	4	1.0	10	45	1.15
G8A46905	RO.6	1.2	4	1.0	12	45	1.15
G8A46930	RO.75	1.5	4	1.2	6	45	1.45
G8A46015	RO.75	1.5	4	1.2	8	45	1.45
G8A46931	RO.75	1.5	4	1.2	10	45	1.45
G8A46906	RO.75	1.5	4	1.2	12	45	1.45
G8A46992	RO.75	1.5	4	1.2	14	50	1.45
G8A46907	RO.75	1.5	4	1.2	16	50	1.45
G8A46932	RO.75	1.5	4	1.2	20	55	1.45
G8A46939	R1.0	2.0	4	1.6	4	45	1.95
G8A46940	R1.0	2.0	4	1.6	6	45	1.95
G8A46020	R1.0	2.0	4	1.6	8	45	1.95
G8A46941	R1.0	2.0	4	1.6	10	45	1.95
G8A46942	R1.0	2.0	4	1.6	12	50	1.95



Due to the characteristics of blue decoration layer which might be erased during short term using, the color layer might not be uniform moreover.

However, it doesn't effect on performance of tool.


◎ : Excellent ○ : Good

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels	High Hardened Steels	Copper	Graphite	Cast Iron	Aluminum	Stainless Steels	Titanium	Inconel	Acrylic	CFRP
~HB225	HB225~325	HRC30~40	HRC40~45 HRC45~55	HRc55~70									
		○	○	◎									



CARBIDE, 2 FLUTE BALL NOSE for RIB PROCESSING
VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS für SCHMALE RIPPEN

- ▶ Designed to machine high hardened materials.
 - ▶ Suitable for dry cutting, high speed cutting thanks to newly developed raw-material and new coating.
 - ▶ Excellent workpiece finish.
 - ▶ Designed for high precision milling operation.
 - ▶ Higher wear-resistance.
- ▶ Geeignet zum Fräsen hochgehärteter Stähle.
 - ▶ Geeignet zum Trockenfräsen und HSC-Fräsen dank neuentwickeltem Material und Beschichtung.
 - ▶ Excellente Werkstückoberflächen.
 - ▶ Geeignet für hochpräzises Fräsen.
 - ▶ Höhere Verschleißfestigkeit.

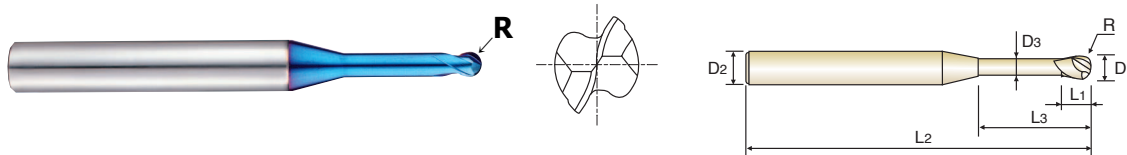

Unit : mm

EDP No.	Radius of Ball Nose R (±0.005)	Mill Diameter D1	Shank Diameter D2	Length of Cut L1	Length Below Shank L3	Overall Length L2	Neck Diameter D3
G8A46943	R1.0	2.0	4	1.6	14	50	1.95
G8A46909	R1.0	2.0	4	1.6	16	50	1.95
G8A46993	R1.0	2.0	4	1.6	18	55	1.95
G8A46910	R1.0	2.0	4	1.6	20	55	1.95
G8A46944	R1.0	2.0	4	1.6	22	60	1.95
G8A46945	R1.0	2.0	4	1.6	25	60	1.95
G8A46967	R1.0	2.0	4	1.6	30	70	1.95
G8A46948	R1.5	3.0	6	2.4	12	50	2.85
G8A46984	R1.5	3.0	6	2.4	14	55	2.85
G8A46030	R1.5	3.0	6	2.4	16	55	2.85
G8A46985	R1.5	3.0	6	2.4	18	60	2.85
G8A46911	R1.5	3.0	6	2.4	20	60	2.85
G8A46968	R1.5	3.0	6	2.4	25	65	2.85
G8A46969	R1.5	3.0	6	2.4	30	70	2.85
G8A46970	R1.5	3.0	6	2.4	35	80	2.85
G8A46950	R2.0	4.0	6	3.2	12	60	3.85
G8A46040	R2.0	4.0	6	3.2	16	60	3.85
G8A46912	R2.0	4.0	6	3.2	20	65	3.85
G8A46913	R2.0	4.0	6	3.2	25	70	3.85
G8A46971	R2.0	4.0	6	3.2	30	70	3.85
G8A46972	R2.0	4.0	6	3.2	35	80	3.85
G8A46973	R2.0	4.0	6	3.2	40	90	3.85
G8A46974	R2.0	4.0	6	3.2	45	90	3.85
G8A46975	R2.0	4.0	6	3.2	50	100	3.85

Due to the characteristics of blue decoration layer which might be erased during short term using, the color layer might not be uniform moreover.
However, it doesn't effect on performance of tool.

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0~-0.012	h6

◎ : Excellent ○ : Good

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		High Hardened Steels	Copper	Graphite	Cast Iron	Aluminum	Stainless Steels	Titanium	Inconel	Acrylic	CFRP
~HB225	HB225~325	HRC30~40	HRc40~45	HRc45~55	HRc55~70									
		○	○	◎	◎									




**RECOMMENDED CUTTING CONDITIONS
EMPHOHLENE SCHNEIDKONDITIONEN**

**CARBIDE, 2 FLUTE BALL NOSE for RIB PROCESSING
VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS für SCHMALE RIPPEN**

G8A46, G8A54 SERIES

MATERIAL HARDNESS DIAMETER	ALLOY STEELS HEAT RESISTANT STEELS					HARDENED STEELS				
	HRc 30 ~ HRc 45					HRc 45 ~ HRc 55				
	RPM	FEED	ap(mm)	Vc	fz	RPM	FEED	ap(mm)	Vc	fz
R0.1 × 0.2	50000	300~350	0.006~0.016	31	0.012~0.014	50000	265~310	0.005~0.013	31	0.011~0.012
R0.15 × 0.3	48000~50000	480~520	0.010~0.017	45~47	0.020~0.021	48000~50000	440~460	0.008~0.014	45~47	0.018~0.018
R0.2 × 0.4	48000~50000	720~790	0.013~0.032	60~63	0.030~0.032	48000~50000	450~550	0.011~0.026	60~63	0.019~0.022
R0.25 × 0.5	34100~49500	600~870	0.007~0.028	54~78	0.035~0.035	31900~35200	490~540	0.005~0.023	50~55	0.031~0.031
R0.3 × 0.6	28600~40700	590~850	0.007~0.034	54~77	0.041~0.042	26400~29700	480~540	0.006~0.028	50~56	0.036~0.036
R0.4 × 0.8	22000~30800	640~890	0.016~0.064	55~77	0.058~0.058	19800~22000	490~550	0.013~0.052	50~55	0.049~0.05
R0.5 × 1.0	17600~24200	600~850	0.008~0.080	55~76	0.068~0.070	15400~17600	470~540	0.007~0.065	48~55	0.061~0.061
R0.6 × 1.2	14300~18700	590~780	0.024~0.032	54~70	0.083~0.083	12000~14000	480~540	0.020~0.026	45~53	0.080~0.077
R0.75 × 1.5	11000~14300	580~760	0.031~0.048	52~67	0.105~0.106	10000~11500	480~540	0.025~0.039	47~54	0.096~0.094
R1.0 × 2.0	8500~11000	590~800	0.024~0.160	53~69	0.139~0.145	7900~8800	470~530	0.020~0.130	50~55	0.119~0.12
R1.5 × 3.0	5700~8200	730~1000	0.064~0.240	54~77	0.256~0.244	5300~5800	590~650	0.052~0.195	50~55	0.223~0.224
R2.0 × 4.0	4300~6200	680~990	0.080~0.320	54~78	0.316~0.319	3950~4400	550~620	0.065~0.260	50~55	0.299~0.282

MATERIAL HARDNESS DIAMETER	HARDENED STEELS					COPPER				
	HRc 55 ~ HRc 65									
	RPM	FEED	ap(mm)	Vc	fz	RPM	FEED	ap(mm)	Vc	fz
R0.1 × 0.2	50000	225~265	0.005~0.012	31~31	0.009~0.011	50000	455~530	0.010~0.022	31~31	0.018~0.021
R0.15 × 0.3	46000~50000	390~420	0.007~0.013	43~47	0.017~0.017	48000~50000	690~790	0.002~0.023	45~47	0.029~0.032
R0.2 × 0.4	46000~50000	400~460	0.010~0.024	58~63	0.017~0.018	48000~50000	1000~1150	0.019~0.048	60~63	0.042~0.046
R0.25 × 0.5	31900~35200	440~480	0.005~0.021	50~55	0.028~0.027	49000~50000	1100~1400	0.010~0.042	77~79	0.045~0.056
R0.3 × 0.6	26400~29700	400~480	0.006~0.025	50~56	0.030~0.032	42000~50000	1100~1700	0.011~0.050	79~94	0.052~0.068
R0.4 × 0.8	19800~22000	440~500	0.012~0.048	50~55	0.044~0.045	31000~50000	1100~2250	0.024~0.096	78~126	0.071~0.090
R0.5 × 1.0	15400~17600	440~500	0.006~0.060	48~55	0.057~0.057	24000~49500	1100~2200	0.012~0.120	75~156	0.092~0.089
R0.6 × 1.2	12000~14000	420~480	0.018~0.024	45~53	0.070~0.069	28500~38500	1480~1950	0.036~0.048	107~145	0.104~0.101
R0.75 × 1.5	10000~11500	420~480	0.023~0.036	47~54	0.084~0.083	17000~28500	1100~1950	0.046~0.072	80~134	0.129~0.137
R1.0 × 2.0	7900~8800	440~480	0.018~0.120	50~55	0.111~0.109	12600~24000	1100~2150	0.036~0.240	79~151	0.175~0.179
R1.5 × 3.0	5300~5800	550~620	0.048~0.120	50~55	0.208~0.214	11900~17000	1850~2700	0.096~0.360	112~160	0.311~0.318
R2.0 × 4.0	3850~4400	530~570	0.060~0.240	48~55	0.275~0.259	6600~12500	1260~2500	0.120~0.480	83~157	0.382~0.400



RPM = rev./min.
FEED = mm/min.
Vc = m/min.
fz = mm/t

- HSS
- CBN END MILLS
- i-Xmill END MILLS
- i-HS mill END MILLS
- X5070 END MILLS
- 4G MILL END MILLS
- X-SPEED ROUGHER END MILLS
- X-POWER END MILLS
- JET-POWER END MILLS
- TN MILL END MILLS
- V7 Mill END MILLS
- ALU-POWER END MILLS
- CRX S END MILLS
- D-POWER GRAPHITE END MILLS
- D-POWER CFRP END MILLS
- ROUTERS
- K-2 CARBIDE END MILLS
- GENERAL CARBIDE END MILLS
- TANK-POWER END MILLS
- GENERAL HSS END MILLS
- MILLING CUTTERS
- TECHNICAL DATA