

i-DREAM DRILL INSERTS & HOLDERS

i-DREAM DRILL EINSÄTZE UND HALTER

**- Features of i-Dream Drill Inserts-
Merkmale des i-Dream Drill Einsätze**

- ▶ Secure and accurate seating resulting in accurate repeatability and concentricity.
Der sichere und genaue Sitz der Platte garantiert genaue Wiederholbarkeit beim Einsatz und beim Rundlauf.

i-Dream Drill General / i-Dream Drill allgemeinen


- ▶ For most steels materials / In den meisten Stahlsorten

i-Dream Drill INOX / i-Dream Drill INOX


- ▶ For tough, ductile materials and stainless steels
Für zähe, verformbare Werkstoffe und rostfreie Stähle.
- ▶ Light, sharp cutting edge / Scharfe Schneidkante
- ▶ Soft cutting action / Weicher Schnitt
- ▶ Minimize cutting forces / Minimaler Schneiddruck
- ▶ Reduce built-up edge / Reduzierte Gratbildung

**- Features of i-Dream Drill Holders-
Merkmale des i-Dream Drill Halter-**

- ▶ Special Alloy Steels maintain its hardness and toughness under high temperatures.
Speziell legierter Stahl, der seine Härte und Zähigkeit auch bei hohen Temperaturen behält.
- ▶ Innovative surface treatment improves wear resistance and reduces corrosion.
Innovative Oberflächenbehandlung, die die Verschleissfestigkeit erhöht und die Korrosion vermindert.
- ▶ High Performance flute design allows maximum chip evacuation and minimum interference.
Optimierte Nutenform für maximale Spanabfuhr.

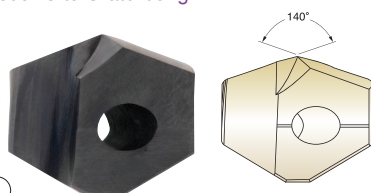

cutting conditions : p.50~51

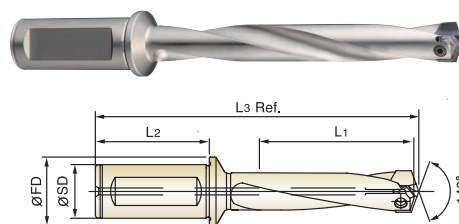

Series Range (mm)	Insert EDP No.		Insert O.D.			Holder EDP No.	Shank Dia. SD	Shank Length L2	Flange Dia. FD	Drilling Depth		Overall Length L3 Ref.	Screw No.	
	General (TiAlN)	INOX (TiCN)	h7							L1	L1			
			dec.	frac.	mm									
G Ø24.00 to Ø25.99	YG1A2400	YG2C2400	0.9449		24.00	ZH24003032				3D	72	164.8	TX2425T20	
	YG1A2421	YG2C2421	0.9531	61/64	24.21	ZH24005032	32	60	37	5D	120	212.8		
	YG1A2450	YG2C2450	0.9646		24.50	ZH24007032				7D	168	260.8		
	YG1A2461	YG2C2461	0.9688	31/32	24.61	ZH24503032				3D	73.5	165.8		
	YG1A2470	YG2C2470	0.9724		24.70	ZH24505032	32	60	37	5D	122.5	214.8		
	YG1A2500	YG2C2500	0.9843	63/64	25.00	ZH24507032				7D	171.5	263.8		
	YG1A2540	YG2C2540	1.0000	1	25.40	ZH25003032	32	60	37	3D	75	167.8		TX2526T20
	YG1A2550	YG2C2550	1.0039		25.50	ZH25005032				5D	125	217.8		
	YG1A2567	YG2C2567	1.0106		25.67	ZH25007032				7D	175	267.8		
	YG1A2570	YG2C2570	1.0118		25.70	ZH25503032				3D	76.5	170.8		
YG1A2580	YG2C2580	1.0156	1 * 1/64	25.80	ZH25505032	32	60	37	5D	127.5	221.8			
					ZH25507032				7D	178.5	272.8			
H Ø26.00 to Ø27.99	YH1A2600	YH2C2600	1.0236		26.00	ZH26003032				3D	78	171.2	TX2627T25	
	YH1A2619	YH2C2619	1.0312	1 * 1/32	26.19	ZH26005032	32	60	37	5D	130	223.2		
	YH1A2650	YH2C2650	1.0433		26.50	ZH26007032				7D	182	275.2		
	YH1A2659	YH2C2659	1.0469	1 * 3/64	26.59	ZH26503032				3D	79.5	172.2		
	YH1A2699	YH2C2699	1.0625	1 * 1/16	26.99	ZH26505032	32	60	37	5D	132.5	225.2		
						ZH26507032				7D	185.5	278.2		
	YH1A2700	YH2C2700	1.0630		27.00	ZH27003032				3D	81	174.2		TX2728T25
						ZH27005032	32	60	37	5D	135	228.2		
						ZH27007032				7D	189	282.2		
	YH1A2750	YH2C2750	1.0827		27.50	ZH27503032				3D	82.5	175.2		
YH1A2778	YH2C2778	1.0938	1 * 3/32	27.78	ZH27505032	32	60	37	5D	137.5	230.2			
					ZH27507032				7D	192.5	285.2			

▶ TiN, TiCN, TiAlN & Hardslick are available on your request.
▶ 10×D Holder is available on your request.

◎ : Excellent ○ : Good

	Non-alloy Steels, Free Machining Steels	Carbon Steels		Alloy Steels		High Alloyed steels		Structural Steels		Tool Steels		Stainless Steels	Cast Iron		Aluminum	Copper Alloys
	~HRc24 (~HB250)	~HRc28 (~HB275)	HRc28~ (~HB275~)	~HRc28 (~HB275)	HRc28~ (~HB275~)	~HRc37 (~HB350)	HRc37~ (~HB350~)	~HRc24 (~HB250)	HRc24~ (~HB250~)	~HRc13 (~HB200)	HRc13~ (~HB200~)	~HRc28 (~HB275)	~HRc19 (~HB220)	HRc19~ (~HB220~)	~HRc8 (~HB180)	~HB110
Y # 1A	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎		◎	◎		
Y # 2C	○	○		○								◎			○	○



RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDKONDITIONEN

METRIC

Material Werkstück		Tensile Strength		Hardness		Cutting Speed Vc [M/min]	Feed [mm/rev]				
		[N/mm²]	HB	HRc	Ø12.0 ~Ø14.9		Ø15.0 ~Ø17.9	Ø18.0 ~Ø21.9	Ø22.0 ~Ø26.9	Ø27.0 ~Ø31.9	
Non-alloyed steels, Cast steels Free-machining steels	9SMn28, 9SMnPb28, 10SPb20 etc	~500	100-150			95~120	0.16-0.28	0.21~0.35	0.27~0.40	0.34~0.52	0.37~0.55
		500-850	150-250	~24		80~105	0.14-0.24	0.21~0.35	0.27~0.40	0.34~0.52	0.37~0.55
Low-alloyed steels, Cast steels(<5%) Carbon steels	C15, C22, 20Mn5, Ck45, C45 etc	~450	85-125			90~115	0.14-0.25	0.20~0.33	0.25~0.39	0.31~0.47	0.34~0.50
		450-755	125-225	~19		70~90	0.12-0.20	0.17~0.28	0.22~0.32	0.30~0.46	0.33~0.49
Alloyed steels	45CrMo4, 42CrMo4, 16MnCr5, Ck75, 35CrMo4, 16MnCr5 etc	755-900	225-265	19-27		60~80	0.12-0.20	0.17~0.28	0.22~0.32	0.30~0.46	0.33~0.49
		900-1200	265-350	27~37		55~70	0.10-0.16	0.15~0.25	0.21~0.30	0.25~0.38	0.29~0.43
		~600	125-175	~7		80~100	0.14-0.24	0.17~0.28	0.22~0.32	0.30~0.46	0.34~0.50
		600-800	175-235	7~22		70~90	0.12-0.20	0.17~0.28	0.22~0.32	0.30~0.46	0.34~0.50
High-alloyed steels	36CrNiMo4, 41CrAlMo7 etc	800-950	235-280	22~29		60~80	0.12-0.20	0.15~0.25	0.22~0.32	0.30~0.46	0.34~0.50
		950-1110	280-330	29~35		55~70	0.10-0.16	0.13~0.21	0.21~0.30	0.25~0.38	0.29~0.43
		1110-1230	330-360	35~39		45~60	0.08-0.12	0.13~0.21	0.21~0.30	0.25~0.38	0.29~0.43
		600-1020	225-300	19~32		45~60	0.12-0.20	0.15~0.25	0.21~0.30	0.20~0.31	0.24~0.35
Structural steels	St33, St37-2, St44-2, St52, St60 etc	1020-1200	300-355	32~38		40~55	0.10-0.16	0.11~0.18	0.21~0.30	0.20~0.31	0.24~0.35
		1200-1330	355-390	38~42		40~50	0.08-0.12	0.09~0.14	0.18~0.26	0.19~0.29	0.23~0.34
		350-500	100-150			75~95	0.14-0.24	0.21~0.35	0.27~0.39	0.29~0.44	0.32~0.47
Tool steels	102Cr6, 105WCr6, C75W etc	500-850	150-250	~24		60~75	0.12-0.20	0.20~0.33	0.22~0.32	0.25~0.38	0.29~0.43
		850-1200	250-355	24~38		50~65	0.10-0.16	0.17~0.28	0.21~0.30	0.21~0.32	0.26~0.38
Grey cast iron	Pearlitic, Ferritic Pearlitic	500-705	150-210	~16		50~65	0.10-0.16	0.13~0.21	0.18~0.26	0.20~0.31	0.24~0.35
		705-950	210-280	16~29		40~50	0.10-0.16	0.13~0.21	0.18~0.26	0.20~0.31	0.24~0.35
Cast iron nodular	Ferritic Pearlitic	500-700	150-210	~16		100~125	0.15-0.26	0.20~0.37	0.27~0.42	0.36~0.51	0.40~0.55
		700-850	210-250	16~24		75~95	0.11~0.20	0.16~0.29	0.20~0.30	0.25~0.35	0.29~0.40
Malleable cast iron	Ferritic Pearlitic	540	165	4		95~120	0.13-0.22	0.17~0.31	0.21~0.32	0.28~0.40	0.32~0.44
		850	250	24		75~95	0.11~0.20	0.14~0.26	0.19~0.29	0.25~0.35	0.29~0.40
Aluminum alloys (Wrought)	not heat treatable hardened	450	125			100~125	0.13-0.22	0.17~0.31	0.21~0.32	0.28~0.40	0.32~0.44
		780	230	21		75~95	0.11~0.18	0.14~0.26	0.19~0.29	0.25~0.35	0.29~0.40
Aluminum alloys (Cast)	≤12% Si, not heat treatable ≤12% Si, hardened >12% Si, not heat treatable	540	165	4		95~120	0.13-0.22	0.17~0.31	0.21~0.32	0.28~0.40	0.32~0.44
		75				250~330	0.30-0.40	0.35~0.45	0.40~0.50	0.45~0.55	0.50~0.60
		150				200~250	0.30-0.40	0.35~0.45	0.40~0.50	0.45~0.55	0.50~0.60
Copper alloys	Free machining(Pb>1%) Brass Electrolytic copper	75				200~50	0.25-0.35	0.30~0.40	0.35~0.45	0.40~0.50	0.45~0.55
		90				150~220	0.25-0.35	0.30~0.40	0.35~0.45	0.40~0.50	0.45~0.55
		130				100~200	0.20-0.30	0.25~0.35	0.30~0.40	0.35~0.45	0.40~0.50
Non ferrous material	Duroplastics Fiber plastics Hard rubber	110				115~145	0.16-0.28	0.23~0.36	0.29~0.36	0.37~0.45	0.41~0.48
		90				145~185	0.17~0.29	0.24~0.37	0.30~0.38	0.38~0.46	0.42~0.49
Stainless steels	Austenitic and Austenitic/ferritic	100				95~120	0.06-0.09	0.09~0.13	0.11~0.13	0.15~0.18	0.19~0.22
		450-610	135-185	~9		45~60	0.10-0.16	0.12~0.18	0.14~0.20	0.15~0.26	0.18~0.28
		610-930	185-275	9~28		30~45	0.08-0.14	0.09~0.15	0.10~0.16	0.12~0.20	0.14~0.22

*Formulas :

RPM = revolution per minute (rev/min)
M/min = surface meter per minute(M/min)
DIA. = diameter of drill (mm)
mm/rev = feed rate(mm/rev)

$$M/min = \frac{(RPM) \cdot \pi \cdot (DIA.)}{1000}$$

$$mm/min = (RPM) \cdot (mm/rev)$$

$$RPM = \frac{(M/min) \cdot 1000}{(\pi) \cdot (DIA.)}$$

- ▶ The recommendations for speeds, feeds and other parameters presented in this chart are nominal recommendations and should be considered only as good starting points.
Speed and feed reductions (20% reduction in speed and 10% reduction in feed) are recommended.
- ▶ Recommend you to reduce the feed rate to 85%,70% when you use 5xD,7xD holders.
- ▶ For use of 7xD holder, we recommend to drill a centering pre-hole with equal to or larger than 140 ° point angle to min. 2/3 cutting diameter.
The use of the centering pre-hole improves hole location , roundness and surface finish.

INCH

Material Werkstück		Tensile Strength	Hardness		Cutting Speed	Feed [IPR]				
		MPa	HB	HRC	Vc [SFM]	Ø31/64 ~Ø37/64	Ø19/32 ~Ø45/64	Ø23/32 ~Ø55/64	Ø7/8 ~Ø1-1/16	Ø1-3/32 ~Ø1-1/4
Non-alloyed steels, Cast steels Free-machining steels	9SMn28, 9SMnPb28, 10SPb20 etc	~500	100~150		312~394	0.006~0.011	0.008~0.014	0.011~0.016	0.013~0.020	0.015~0.022
		500~850	150~250	~24	262~344	0.006~0.009	0.008~0.014	0.011~0.016	0.013~0.020	0.015~0.022
Low-alloyed steels, Cast steels(<5%) Carbon steels	C15, C22, 20Mn5, Ck45, C45 etc	~450	85~125		295~377	0.006~0.010	0.008~0.013	0.010~0.015	0.012~0.019	0.013~0.020
		450~755	125~225	~19	230~295	0.005~0.008	0.007~0.011	0.009~0.013	0.012~0.018	0.013~0.019
		755~900	225~265	19~27	197~262	0.005~0.008	0.007~0.011	0.009~0.013	0.012~0.018	0.013~0.019
Alloyed steels	45CrMo4, 42CrMo4, 16MnCr5, Ck75, 35CrMo4, 16MnCr5 etc	900~1200	265~350	27~37	180~230	0.004~0.006	0.006~0.010	0.008~0.012	0.010~0.015	0.011~0.017
		~600	125~175	~7	262~328	0.006~0.009	0.007~0.011	0.009~0.013	0.012~0.018	0.013~0.020
		600~800	175~235	7~22	230~295	0.005~0.008	0.007~0.011	0.009~0.013	0.012~0.018	0.013~0.020
		800~950	235~280	22~29	197~262	0.005~0.008	0.006~0.010	0.009~0.013	0.012~0.018	0.013~0.020
		950~1110	280~330	29~35	180~230	0.004~0.006	0.005~0.008	0.008~0.012	0.010~0.015	0.011~0.017
High-alloyed steels	36CrNiMo4, 41CrAlMo7 etc	600~1020	225~300	19~32	148~197	0.005~0.008	0.006~0.010	0.008~0.012	0.008~0.012	0.009~0.014
		1020~1200	300~355	32~38	131~180	0.004~0.006	0.004~0.007	0.008~0.012	0.008~0.012	0.009~0.014
		1200~1330	355~390	38~42	131~164	0.003~0.005	0.004~0.006	0.007~0.010	0.007~0.011	0.009~0.013
Structural steels	St33, St37-2, St44-2, St52, St60 etc	350~500	100~150		246~312	0.006~0.009	0.008~0.014	0.011~0.015	0.011~0.017	0.013~0.019
		500~850	150~250	~24	197~246	0.005~0.008	0.008~0.013	0.009~0.013	0.010~0.015	0.011~0.017
		850~1200	250~355	24~38	164~213	0.004~0.006	0.007~0.011	0.008~0.012	0.008~0.013	0.010~0.015
Tool steels	102Cr6, 105WCr6, C75W etc	500~705	150~210	~16	164~213	0.004~0.006	0.005~0.008	0.007~0.010	0.008~0.012	0.009~0.014
		705~950	210~280	16~29	131~164	0.004~0.006	0.005~0.008	0.007~0.010	0.008~0.012	0.009~0.014
Grey cast iron	Pearlitic, Ferritic Pearlitic	500~700	150~210	~16	328~410	0.006~0.010	0.008~0.015	0.011~0.017	0.014~0.020	0.016~0.022
		700~850	210~250	16~24	246~312	0.004~0.008	0.006~0.011	0.008~0.012	0.010~0.014	0.011~0.016
Cast iron nodular	Ferritic Pearlitic	540	165	4	312~394	0.005~0.009	0.007~0.012	0.008~0.013	0.011~0.016	0.013~0.017
		850	250	24	246~312	0.004~0.008	0.006~0.010	0.007~0.011	0.010~0.014	0.011~0.016
Malleable cast iron	Ferritic Pearlitic	450	125		328~410	0.005~0.009	0.007~0.012	0.008~0.013	0.011~0.016	0.013~0.017
		780	230	21	246~312	0.004~0.007	0.006~0.010	0.007~0.011	0.010~0.014	0.011~0.016
Aluminum alloys (Wrought)	not heat treatable hardened		65		820~1083	0.0118~0.0157	0.0138~0.0177	0.0157~0.0197	0.0177~0.0217	0.0197~0.0236
			150		656~820	0.0118~0.0157	0.0138~0.0177	0.0157~0.0197	0.0177~0.0217	0.0197~0.0236
Aluminum alloys (Cast)	≤12% Si, not heat treatable ≤12% Si, hardened >12% Si, not heat treatable		75		656~820	0.0098~0.0138	0.0118~0.0157	0.0138~0.0177	0.0157~0.0197	0.0177~0.0217
			90		492~722	0.0098~0.0138	0.0118~0.0157	0.0138~0.0177	0.0157~0.0197	0.0177~0.0217
			130		328~656	0.0079~0.0118	0.0098~0.0138	0.0118~0.0157	0.0138~0.0177	0.0157~0.0197
Copper alloys	Free machining(Pb>1%) Brass Electrolitic copper		110		377~476	0.006~0.011	0.009~0.014	0.011~0.014	0.015~0.018	0.016~0.019
			90		476~607	0.007~0.011	0.009~0.015	0.012~0.015	0.015~0.018	0.017~0.019
			100		312~394	0.002~0.004	0.004~0.005	0.004~0.005	0.006~0.007	0.007~0.009
Non ferrous material	Duroplastics Fiber plastics Hard rubber									
Stainless steels	Austenitic and Austenitic/ferritic	450~610	135~185	~9	145~197	0.004~0.006	0.005~0.007	0.006~0.008	0.006~0.011	0.007~0.011
		610~930	185~275	9~28	89~145	0.003~0.005	0.004~0.006	0.004~0.006	0.005~0.008	0.006~0.009

Y1A / Y2C

Y2C

*Formulas :

$$SFM = \frac{(RPM) \cdot \pi \cdot (DIA.)}{12}$$

$$IPM = (RPM) \cdot (IPR)$$

$$RPM = \frac{(SFM) \cdot 12}{(\pi) \cdot (DIA.)}$$

RPM = revolution per minute (rev/min)
SFM = surface feet per minute (ft/min)
DIA. = diameter of drill (inch)
IPR = feed rate (inch/rev)
IPM = inch per minute penetration rate

- ▶ The recommendations for speeds, feeds and other parameters presented in this chart are nominal recommendations and should be considered only as good starting points.
Speed and feed reductions (20% reduction in speed and 10% reduction in feed) are recommended.
- ▶ Recommend you to reduce the feed rate to 85%,70% when you use 5xD,7xD holders.
- ▶ For use of 7xD holder, we recommend to drill a centering pre-hole with equal to or larger than 140 ° point angle to min. 2/3 cutting diameter.
The use of the centering pre-hole improves hole location , roundness and surface finish.