
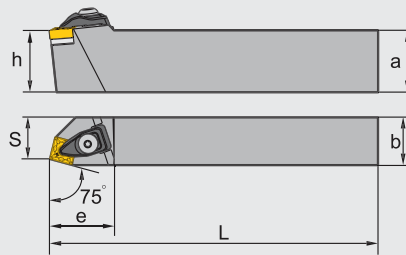


SN** Toolholder · Halter

D-Clamping · D-Halter

DSBNR/ L

Kr:75°



Type Typ		Stock Lager		Dimension (mm) Abmessung						Screw Schraube	Shim Unterlage	Wrench Schlüssel	Clamp Pratze	Shim pin Rohrstift	Spring Feder
		R	L	a	b	L	h	s	e						
DSBNR/L	1616H09	●	○	16	16	100	16	13	26	CM5x22C	S09BM	WH30L	C1RA	SM5 × 8.65XA1	SPR6
	2020K12	●	●	20	20	125	20	17	34						
	2525M12	●	●	25	25	150	25	22	34	CM6x25C	S12BM	WH40L	C2RA	SM6 × 10XA1	SPR4
	3225P12	●	●	32	25	170	32	22	34						
	3232P15	●	●	32	32	170	32	27	41	CM6x25C	S15BM	WH40L	C3RA	SM6 × 10XA2	SPR4

Applicable insert
Wendeschneidplatten

Application Anwendung		Finishing Schlichten	Semi-Finishing Mittlere Bearbeitung	Roughing Schruppen	Heavy Duty Schwerzerspanung	Cast iron machining Grauguss-Bearbeit.	PCBN · PCD PCBN · PKD
insert shape Schneidplattenform	DF  A73	PM  A74	DR Double side doppel seitig  A76	HDR  A78	Flat Flach  A80	Flat Flach  A131	
	EF  A73	DM  A75	DR Single side einseitig  A77	HPR  A78	TC  A75		
	SF  A74	EM  A75	ER Double side doppel seitig  A76				
		NM  A76	ER Single side einseitig  A78				
			LR Single side einseitig  A77				
Type · Typ	DSBNR/L**H09	SN**0903**	SN**0903**			SN**0903**	
	DSBNR/L**K/M/P12	SN**1204**	SN**1204**	SN**1204**	SN**1204**	SN**1204**	SN**1204**
	DSBNR/L**P15	SN**1506**	SN**1506**	SN**1506**	SN**1506**	SN**1506**	SN**1506**

A

General Turning
Allgemeine Drehbearbeitung