


Deburring Cutter 90° Entgratfräser 90°

5501/5601



Coating
Coated

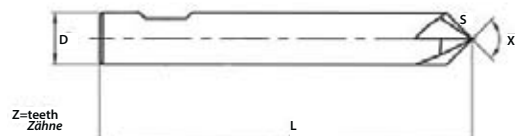


Article no. Artikel Nr.	Dimension (mm) Abmessung					Shank Schaft	P M K Grade / Sorte KMG 303
	D	L	S	Z	X		
5501R903FM-0300	3	48	2.1	3	90	HA	●
5501R904FM-0400	4	48	2.8	4	90	HA	●
5601R904FM-0600	6	55	4.2	4	90	HB	●
5601R904FM-0800	8	58	5.6	4	90	HB	●
5601R904FM-1000	10	65	7.0	4	90	HB	●
5601R904FM-1200	12	75	8.5	4	90	HB	●
5601R904FM-1600	16	85	11.3	4	90	HB	●

Deburring Cutter 60° Entgratfräser 60°

5501/5601



Coating
Coated

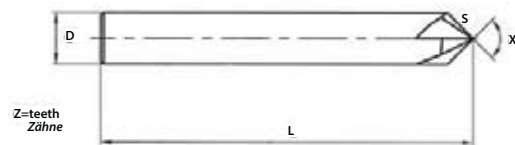

Article no. Artikel Nr.	Dimension (mm) Abmessung					Shank Schaft	P M K Grade / Sorte KMG 303
	D	L	S	Z	X		
5501R603FM-0300	3	48	3	3	60	HA	●
5501R604FM-0400	4	48	4	4	60	HA	●
5601R604FM-0600	6	55	6	4	60	HB	●
5601R604FM-0800	8	58	8	4	60	HB	●
5601R604FM-1000	10	65	10	4	60	HB	●
5601R604FM-1200	12	75	12	4	60	HB	●
5601R604FM-1600	16	85	16	4	60	HB	●

Code key B252,B254
ISO Kennzeichen

Cutting data B530
Schnittdaten

Graphics identification & application B253,B255
Graphische Werkzeug- & Anwendungsbeschr.

Order form for non-standard products B534-B535
Bestellformular für Sonderwerkzeuge

Milling · Fräsen

Solid Carbide end mills · Vollhartmetallschaftfräser

Corner Radius Cutter Viertelkreisfräser

5601



Coating
Coated

Article no. Artikel Nr.	Dimension (mm) Abmessung					Shank Schaft	P M K
	d1	D	L	Z	R		Grade / Sorte KMG 303
5601R904FM-R02-0600	5.6	6	60	4	0.2	HB	●
5601R904FM-R03-0600	5.4	6	60	4	0.3	HB	●
5601R904FM-R04-0600	5.2	6	60	4	0.4	HB	●
5601R904FM-R05-0800	7.0	8	70	4	0.5	HB	●
5601R904FM-R06-0800	6.8	8	70	4	0.6	HB	●
5601R904FM-R075-0800	6.5	8	70	4	0.75	HB	●
5601R904FM-R08-0800	6.4	8	70	4	0.8	HB	●
5601R904FM-R10-0800	6.0	8	70	4	1.0	HB	●
5601R904FM-R15-1000	7.0	10	75	4	1.5	HB	●
5601R904FM-R20-1000	6.0	10	75	4	2.0	HB	●
5601R904FM-R25-1200	7.0	12	75	4	2.5	HB	●
5601R904FM-R30-1200	6.0	12	75	4	3.0	HB	●
5601R904FM-R40-1600	8.0	16	80	4	4.0	HB	●
5601R904FM-R50-2000	10.0	20	80	4	5.0	HB	●

Recommended Cutting data Empfohlene Schnittdaten

Material Werkstoffe		D (mm)	Vc (m/min)	Feed rate Vorschub fz (mm/Z)	Material Werkstoffe		D (mm)	Vc (m/min)	Feed rate Vorschub fz (mm/Z)
P	Steel Stahl	3	70-120	0,01	K	Cast iron Guss	3	90	0,01
		4	70-120	0,02			4	90	0,02
		6	70-120	0,03			6	90	0,03
		8	70-120	0,04			8	90	0,04
		10	70-120	0,05			10	90	0,05
		12	70-120	0,06			12	90	0,06
M	Stainless Steel Rostfreier Stahl	16	70-120	0,08	N	Nonferrite Materials Ne-Metalle	16	90	0,08
		3	60-90	0,01			3	200-280	0,01
		4	60-90	0,02			4	200-280	0,02
		6	60-90	0,03			6	200-280	0,03
		8	60-90	0,04			8	200-280	0,04
		10	60-90	0,05			10	200-280	0,05
		12	60-90	0,06			12	200-280	0,06
		16	60-90	0,08			16	200-280	0,08

● Ex Stock / ab Lager ○ On demand / auf Anfrage