




JEWELLED BEARING

DIAL INDICATORS (STANDARD MODEL)

- Meet DIN878
- Jeweled bearing
- Supplied with limit pointers and bezel clamp
- Optional accessory: backs (page 104~105), contact points (page 102~103)



2308-10A



Code	Range	Graduation	Accuracy	Hysteresis	Range/rev	Dial reading	Remark
2308-3FA *	3mm	0.01mm	14μm	3μm	1mm	0-100	flat back
2308-5FA *	5mm	0.01mm	16μm	3μm	1mm	0-100	flat back
2308-10FA *	10mm	0.01mm	17μm	3μm	1mm	0-100	flat back
2308-3A *	3mm	0.01mm	14μm	3μm	1mm	0-100	lug back
2308-5A *	5mm	0.01mm	16μm	3μm	1mm	0-100	lug back
2308-10A *	10mm	0.01mm	17μm	3μm	1mm	0-100	lug back

* Supplied with manufacturer inspection certificate traceable to NIST USA




JEWELLED BEARING

REVERSE READING DIAL INDICATORS

- Meet DIN878
- Suitable for depth and step measurements
- Jeweled bearing
- Supplied with limit pointers and bezel clamp
- Optional accessory: backs (page 104~105), contact points (page 102~103)



2801-10



Code	Range	Graduation	Accuracy	Hysteresis	Range/rev	Dial reading	Remark
2801-10F *	10mm	0.01mm	17μm	3μm	1mm	100-0	flat back
2801-10 *	10mm	0.01mm	17μm	3μm	1mm	100-0	lug back

* Supplied with manufacturer inspection certificate traceable to NIST USA



SHOCK PROOF


JEWELLED BEARING

SHOCKPROOF DIAL INDICATORS

- Meet DIN878
- Shockproof
- Jeweled bearing
- Supplied with limit pointers and bezel clamp
- Optional accessory: backs (page 104~105), contact points (page 102~103)



2314-10A

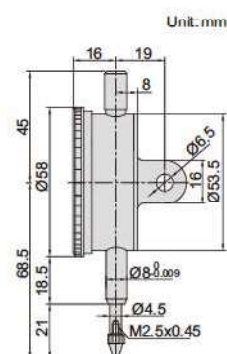

Code	Range	Graduation	Accuracy	Hysteresis	Range/rev	Dial reading	Remark
2314-3FA *	3mm	0.01mm	14μm	3μm	1mm	0-100	flat back
2314-5FA *	5mm	0.01mm	16μm	3μm	1mm	0-100	flat back
2314-10FA *	10mm	0.01mm	20μm	3μm	1mm	0-100	flat back
2314-3A *	3mm	0.01mm	14μm	3μm	1mm	0-100	lug back
2314-5A *	5mm	0.01mm	16μm	3μm	1mm	0-100	lug back
2314-10A *	10mm	0.01mm	20μm	3μm	1mm	0-100	lug back

* Supplied with manufacturer inspection certificate traceable to NIST USA