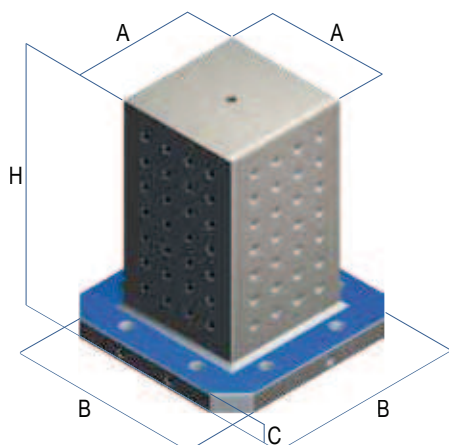
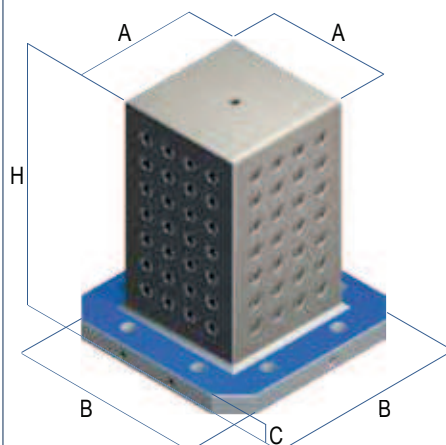


CUBI CUBES

Art. 53E

Reticolo integrale
Grid cube

Art. 53F

Reticolo con bussole
Grid cube
with bushing

Stesse dimensioni dell'Art. 53C / Same dimensions of Art. 53C

Peso: -5% circa rispetto Art. 53C / Weight: About -5% of Art. 53C

Art. 53E 40		Art. 53E 50		Art. 53F 40		Art. 53F 50	
Cod.		Cod.		Cod.		Cod.	
8.53.E40020		8.53.E00020		8.53.F40020		8.53.F00020	
8.53.E40030		8.53.E00030		8.53.F40030		8.53.F00030	
8.53.E40040		8.53.E00040		8.53.F40040		8.53.F00040	
8.53.E40050		8.53.E00050		8.53.F40050		8.53.F00050	
8.53.E40060		8.53.E00060		8.53.F40060		8.53.F00060	
8.53.E40070		8.53.E00070		8.53.F40070		8.53.F00070	
8.53.E40080		8.53.E00080		8.53.F40080		8.53.F00080	
8.53.E40081		8.53.E00081		8.53.F40081		8.53.F00081	
8.53.E40090		8.53.E00090		8.53.F40090		8.53.F00090	
8.53.E40100		8.53.E00100		8.53.F40100		8.53.F00100	
8.53.E40105		8.53.E00105		8.53.F40105		8.53.F00105	
8.53.E40106		8.53.E00106		8.53.F40106		8.53.F00106	
8.53.E40107		8.53.E00107		8.53.F40107		8.53.F00107	
8.53.E40110		8.53.E00110		8.53.F40110		8.53.F00110	
8.53.E40111		8.53.E00111		8.53.F40111		8.53.F00111	
8.53.E40113		8.53.E00113		8.53.F40113		8.53.F00113	
8.53.E40115		8.53.E00115		8.53.F40115		8.53.F00115	
8.53.E40120		8.53.E00120		8.53.F40120		8.53.F00120	
8.53.E40140		8.53.E00140		8.53.F40140		8.53.F00140	
8.53.E40150		8.53.E00150		8.53.F40150		8.53.F00150	
8.53.E40160		8.53.E00160		8.53.F40160		8.53.F00160	
8.53.E40170		8.53.E00170		8.53.F40170		8.53.F00170	
8.53.E40171		8.53.E00171		8.53.F40171		8.53.F00171	
8.53.E40172		8.53.E00172		8.53.F40172		8.53.F00172	
8.53.E40180		8.53.E00180		8.53.F40180		8.53.F00180	
8.53.E40181		8.53.E00181		8.53.F40181		8.53.F00181	
8.53.E40185		8.53.E00185		8.53.F40185		8.53.F00185	
8.53.E40190		8.53.E00190		8.53.F40190		8.53.F00190	
8.53.E40200		8.53.E00200		8.53.F40200		8.53.F00200	
8.53.E40211		8.53.E00211		8.53.F40211		8.53.F00211	
8.53.E40220		8.53.E00220		8.53.F40220		8.53.F00220	
8.53.E40230		8.53.E00230		8.53.F40230		8.53.F00230	

Specifiche Specifications

Art. 53A

Fusione in ghisa G30 monoblocco sgrossata con doppio trattamento di distensione.
Pareti con spessore 43-45 mm
(Sovrametallo 10 mm)

One integral G30 cast iron casting rough milled with double stress relieving heat treatment.
Wall thickness 43-45 mm
(10 mm stock)

Art. 53B

Fusione sgrossata con base lavorata e raschiata per pallet a norme Europee o Giapponesi.

Vedi specifiche a pag. 8.4

Rough milled casting with base face machined and hand scraped for direct clamping on European or Japanese standard pallet.
See specifications pag. 8.4

Art. 53C

Cubo completamente finito con pareti spessore 38-40 mm circa.

Cube completely finished with wall thickness roughly 38-40 mm

Art. 53E 40 / 50

Cubo a reticolo con fori calibrati e filettati integrali
Tolleranza $\pm 0,02$ mm

■ Interasse reticolo 40 mm = Ø 12 / M10

■ Interasse reticolo 50 mm = Ø 16 / M12

Grid cube with calibrated holes and solid threads
Tolerance $\pm 0,02$ mm

■ Grid pitch 40 mm = Ø 12 / M10

■ Grid pitch 50 mm = Ø 16 / M12

Art. 53F 40 / 50

Cubo a reticolo con bussole temprate 100Cr6 e filetti riportati in acciaio inox
Tolleranza $\pm 0,02$ mm

■ Interasse reticolo 40 mm = Ø 12 / M10

■ Interasse reticolo 50 mm = Ø 16 / M12

Grid cube with hardened bushing 100Cr6 and stainless steel helicoils
Tolerance $\pm 0,02$ mm

■ Grid pitch 40 mm = Ø 12 / M10

■ Grid pitch 50 mm = Ø 16 / M12



For different finishing and materials (aluminium), ask for specific quotation