


DIAL INDICATOR



2318-30

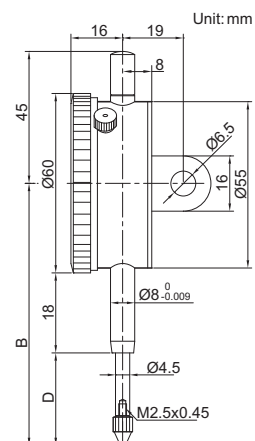


- Supplied with limit hands and bezel clamp
- Optional accessory: backs (page F15), contact points (page F11-F14)

								(mm)	
Code	Range	Graduation	Accuracy(f_{ges})	Hysteresis(f_u)	Range/rev	Dial reading	Remark	B	D
2318-10	10mm	0.1mm	40 μ m	20 μ m	10mm	0-10	lug back	70	20
2318-20	20mm	0.1mm	50 μ m	20 μ m	10mm	0-10	lug back	85	35
2318-25	25mm	0.1mm	60 μ m	20 μ m	10mm	0-10	lug back	85	35
2318-30	30mm	0.1mm	60 μ m	20 μ m	10mm	0-10	lug back	90	40
2318-10F	10mm	0.1mm	40 μ m	20 μ m	10mm	0-10	flat back	70	20
2318-20F	20mm	0.1mm	50 μ m	20 μ m	10mm	0-10	flat back	85	35
2318-25F	25mm	0.1mm	60 μ m	20 μ m	10mm	0-10	flat back	85	35
2318-30F	30mm	0.1mm	60 μ m	20 μ m	10mm	0-10	flat back	90	40

INCH DIAL INDICATOR



2307-1

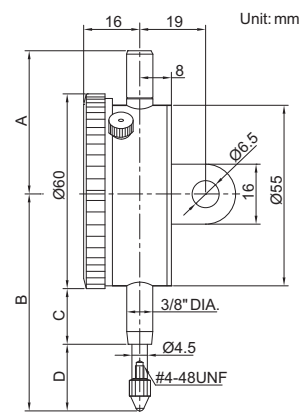

- Supplied with limit hands and bezel clamp
- Optional accessory: backs (page F15)

								(mm)			
Code	Range	Graduation	Accuracy(f_{ges})	Hysteresis(f_u)	Range/rev	Dial reading	Remark	A	B	C	D
2307-025	0.25"	0.001"	0.004"	0.00033"	0.1"	0-100	lug back	46	75	20	25
2307-05	0.5"	0.001"	0.004"	0.00033"	0.1"	0-100	lug back	46	75	20	25
2307-1	1"	0.001"	0.004"	0.00033"	0.1"	0-100	lug back	46	85	20	35
2307-2	2"	0.001"	0.008"	0.00033"	0.1"	0-100	lug back	111	139	50	59