

TAPE BORE GAGES




MEASURE INTERNAL DIAMETER OF FLEXIBLE MATERIALS (FOR EXAMPLE, BELT)

- Graduation: 0.1mm
- Accuracy: 0.2mm

Code	Range ØD	Ød	ØA	Measuring depth (mm)
2430-24	14-24mm	13.5	13	15-60
2430-40	22-40mm	21.5	21	15-60
2430-60	35-60mm	34.5	30.5	15-96
2430-100	55-100mm	54.5	30.5	15-106
2430-180	95-180mm	94.5	30.5	15-106
2430-255	170-255mm	169.5	30.5	15-106
2430-330	245-330mm	244.5	30.5	15-106



2430-100

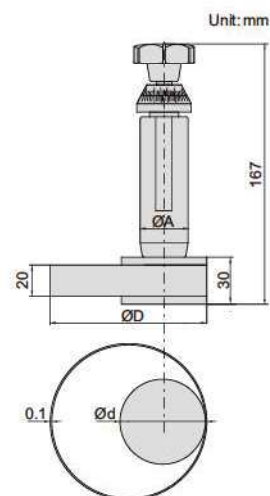


CIRCUMFERENCE TAPES

ATTENTION: BASIC MODEL


- Graduation: 0.1mm
- Measure diameter and circumference of pipes, trees, tires, etc.
- Laser engraved scale
- Made of stainless steel



7114-950



Code	Circumference range	Diameter range	Accuracy	
			Circumference	Diameter
7114-950	60-950mm	Ø20-300mm	±1.5mm	±0.5mm
7114-2200	940-2200mm	Ø300-700mm	±1.5mm	±0.5mm
7114-3460	2190-3460mm	Ø700-1100mm	±1.5mm	±0.5mm




CIRCUMFERENCE TAPES



- Graduation: 0.1mm
- Measure diameter and circumference of pipes, trees, tires, etc.
- Laser engraved scale
- Made of stainless steel



7115-3460



Code	Circumference range	Diameter range	Accuracy	
			Circumference	Diameter
7115-950 *	150-950mm	Ø50-300mm	±0.60mm	±0.20mm
7115-2200	940-2200mm	Ø300-700mm	±0.60mm	±0.20mm
7115-3460	2190-3460mm	Ø700-1100mm	±0.60mm	±0.20mm
7115-4720	3450-4720mm	Ø1100-1500mm	±0.90mm	±0.30mm
7115-5980	4710-5980mm	Ø1500-1900mm	±0.90mm	±0.30mm

* When diameter range Ø50-100mm, the accuracy of circumference is ±0.90mm, diameter is ±0.30mm.

