

RS232 DATA OUTPUT CABLES



automatic judgment
by setting tolerance

test result display (maximum value,
minimum value, total quantity of
workpiece, quantity of Go and
No-Go, quantity of exceed upper
tolerance and exceed lower tolerance)



manual
sampling

automatic
sampling

set auto sampling
interval and tolerance



7305-SPC1A




7305-SPC2A




USB power port
7305-SPC3



foot switch (optional)
7304-2



- Manual sampling and automatic sampling
- Press manual sampling button in software or red button on cable or foot switch once to collect the reading from measuring tool once
- Can be used in Windows Hyperterminal
- Supplied with software
- Voltage required: 5-10V
- Cable length 2.5m



Code	Applicable products
7305-SPC1A	digital indicators digital protractors
7305-SPC2A	digital calipers and digital depth gages (not for 1103)
7305-SPC3	digital micrometers (not for 3631, 3632, 3108, 3109, 3635)
7305-SPC3A	digital micrometers (not for 3631, 3632, 3108, 3109, 3635)
7304-2	foot switch with cable (length 1.5m), optional

DIGITAL HORIZONTAL SCALES

DATA
OUTPUT







7101-300A



7101-400A

example of application

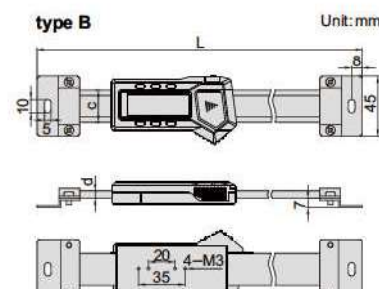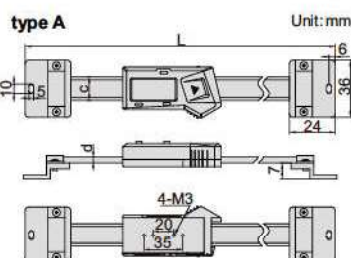

Code	Range	Type	Accuracy	L	c	d
7101-100A	100mm	A	±0.02mm	215	16	4
7101-150A	150mm	A	±0.03mm	265	16	4
7101-200A	200mm	A	±0.03mm	315	16	4
7101-300A	300mm	A	±0.04mm	445	16	4
7101-400A	400mm	B	±0.05mm	590	24	5.5
7101-500A	500mm	B	±0.05mm	690	24	5.5
7101-600A	600mm	B	±0.08mm	790	24	5.5
7101-800A	800mm	B	±0.10mm	990	24	5.5
7101-1000A	1000mm	B	±0.10mm	1190	31	10.5

- Resolution: 0.01mm/0.0005"
- Buttons: on/off, zero, mm/inch
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Data output
- Made of stainless steel
- Supplied with bracket to be mounted on the back
- Optional accessory: data output cable (code 7306-20, 7302-SPC5A/SPC5B, 7305-SPC2A)

- Resolution: 0.01mm/0.0005"
- Button function: on/off, zero, mm/inch, ABS, data preset
- Absolute and incremental measurement
- Battery CR2032
- Data output
- Made of stainless steel
- Supplied with bracket to be mounted on the back
- Optional accessory: data output cable (code 7306-20, 7302-SPC5A/SPC5B, 7305-SPC2A)